
autobahn
Release 19.9.3

Sep 09, 2019

1	Autobahn/Python	1
1.1	Autobahn Features	1
1.2	What can I do with Autobahn?	2
1.3	Show me some code!	3
1.4	Where to start	4
1.5	Get in touch	4
1.6	Contributing	5
1.7	Release Testing	5
1.8	Sitemap	6
2	Installation	7
2.1	Requirements	7
2.1.1	Supported Configurations	7
2.1.2	Performance Note	8
2.2	Installing Autobahn	8
2.2.1	Using Docker	8
2.2.2	Install from PyPI	8
2.2.3	Install from Sources	8
2.2.4	Install Variants	9
2.2.5	Windows Installation	9
2.3	Check the Installation	9
2.4	Depending on Autobahn	10
3	Asynchronous Programming	11
3.1	Introduction	11
3.1.1	The asynchronous programming approach	11
3.1.2	Other forms of Concurrency	12
3.1.3	Twisted or asyncio?	12
3.2	Resources	13
3.2.1	Twisted Resources	13
3.2.2	Asyncio Resources	14
3.3	Asynchronous Programming Primitives	14
3.3.1	Twisted Deferreds and inlineCallbacks	14
3.3.2	Asyncio Futures and Coroutines	16
4	WebSocket Programming	19
4.1	Creating Servers	19

4.1.1	Server Protocols	19
4.1.2	Receiving Messages	20
4.1.3	Sending Messages	21
4.1.4	Running a Server	22
4.2	Connection Lifecycle	23
4.2.1	Opening Handshake	23
4.2.2	Connection Open	24
4.2.3	Closing a Connection	24
4.2.4	Connection Close	25
4.3	Creating Clients	25
4.3.1	Client Protocols	25
4.3.2	Running a Client	26
4.4	WebSocket Options	28
4.4.1	Common Options (server and client)	28
4.4.2	Server-Only Options	28
4.4.3	Client-Only Options	29
4.5	Upgrading	29
4.5.1	From < 0.7.0	29
5	WAMP Programming	31
5.1	Application Components	31
5.1.1	Creating Components	32
5.1.2	Running Components	33
5.1.3	Running Subclass-Style Components	33
5.1.4	Patterns for More Complicated Applications	34
5.1.5	Longer Example	36
5.2	Component Configuration Options	38
5.2.1	transports=	38
5.2.2	realm=	39
5.2.3	session_factory=	39
5.2.4	authentication=	39
5.3	Running a WAMP Router	40
5.4	Remote Procedure Calls	40
5.4.1	Registering Procedures	40
5.4.2	Calling Procedures	42
5.5	Publish & Subscribe	42
5.5.1	Subscribing to Topics	43
5.5.2	Publishing Events	44
5.6	Session Lifecycle	45
5.7	Logging	46
5.8	Upgrading	47
5.8.1	From < 0.8.0	47
5.8.2	From < 0.9.4	47
6	XBR Programming	49
6.1	On-chain XBR smart contracts	50
6.1.1	SimpleBlockchain	50
6.1.2	SimpleBlockchain Example	50
6.1.3	Using the ABI files	51
6.1.4	Data stored on-chain	51
6.2	Off-chain XBR market maker	52
6.2.1	SimpleBuyer	52
6.2.2	SimpleBuyer Example	52
6.2.3	SimpleSeller	53

6.2.4	SimpleSeller Example	53
6.2.5	KeySeries	54
6.3	Interface Reference	54
6.3.1	IMarketMaker	54
6.3.2	IProvider	54
6.3.3	IConsumer	54
6.3.4	ISeller	54
6.3.5	IBuyer	54
7	WebSocket Examples	55
7.1	Basic Examples	55
7.1.1	Echo	55
7.1.2	Slow Square	55
7.1.3	Testee	55
7.2	Additional Examples	56
7.2.1	Secure WebSocket	56
7.2.2	WebSocket and Twisted Web	56
7.2.3	Twisted Web, WebSocket and WSGI	56
7.2.4	Secure WebSocket and Twisted Web	56
7.2.5	WebSocket Ping-Pong	56
7.2.6	More	56
8	WAMP Examples	59
8.1	Overview of Examples	59
8.2	Automatically Run All Examples	60
8.3	Publish & Subscribe (PubSub)	60
8.4	Remote Procedure Calls (RPC)	60
8.5	I'm Confused, Just Tell Me What To Run	60
9	API Reference	61
9.1	Module <code>autobahn.util</code>	61
9.2	Module <code>autobahn.websocket</code>	66
9.2.1	WebSocket Interfaces	66
9.2.2	WebSocket Types	72
9.2.3	WebSocket Compression	75
9.2.4	WebSocket Utilities	78
9.3	Module <code>autobahn.rawsocket</code>	79
9.3.1	RawSocket Utilities	79
9.4	Module <code>autobahn.wamp</code>	80
9.4.1	WAMP Interfaces	80
9.4.2	WAMP Types	87
9.4.3	WAMP Exceptions	94
9.4.4	WAMP Authentication and Encryption	96
9.5	Module <code>autobahn.wamp.component</code>	98
9.5.1	Component	98
9.6	Module <code>autobahn.twisted</code>	99
9.6.1	Component	100
9.6.2	WebSocket Protocols and Factories	101
9.6.3	WAMP-over-WebSocket Protocols and Factories	102
9.6.4	WAMP-over-RawSocket Protocols and Factories	102
9.6.5	WAMP Sessions	103
9.7	Module <code>autobahn.asyncio</code>	105
9.7.1	Component	105
9.7.2	WebSocket Protocols and Factories	106

9.7.3	WAMP-over-WebSocket Protocols and Factories	107
9.7.4	WAMP-over-RawSocket Protocols and Factories	108
9.7.5	WAMP Sessions	109
10	Changelog	111
10.1	19.9.3	111
10.2	19.9.2	111
10.3	19.9.1	111
10.4	19.8.1	111
10.5	19.7.2	111
10.6	19.7.1	112
10.7	19.6.2	112
10.8	19.6.1	112
10.9	19.5.1	112
10.10	19.3.3	113
10.11	19.3.2	113
10.12	19.3.1	113
10.13	19.2.1	113
10.14	19.1.1	113
10.15	18.12.1	114
10.16	18.11.2	114
10.17	18.11.1	114
10.18	18.10.1	114
10.19	18.9.2	114
10.20	18.9.1	115
10.21	18.8.2	115
10.22	18.8.1	115
10.23	18.7.1	115
10.24	18.6.1	115
10.25	18.5.2	115
10.26	18.5.1	116
10.27	18.4.1	116
10.28	18.3.1	116
10.29	17.10.1	116
10.30	17.9.3	116
10.31	17.9.2	117
10.32	17.9.1	117
10.33	17.8.1	117
10.34	17.7.1	117
10.35	17.6.2	117
10.36	17.6.1	118
10.37	17.5.1	118
10.38	0.18.2	118
10.39	0.18.1	118
10.40	0.18.0	119
10.41	0.17.2	119
10.42	0.17.1	119
10.43	0.17.0	119
10.44	0.16.1	120
10.45	0.16.0	120
10.46	0.15.0	120
10.47	0.14.1	120
10.48	0.14.0	121
10.49	0.13.1	121

10.50 0.13.0	121
10.51 0.12.1	121
10.52 0.11.0	122
10.53 0.10.9	122
10.54 0.10.8	122
10.55 0.10.7	122
10.56 0.10.6	122
10.57 0.10.5	123
10.58 0.10.4	123
10.59 0.10.3	123
10.60 0.10.2	123
10.61 0.10.1	123
10.62 0.10.0	124
10.63 0.9.6	124
10.64 0.9.5	124
10.65 0.9.4	124
10.66 0.9.3-2	125
10.67 0.9.3	125
10.68 0.9.2	125
10.69 0.9.1	125
10.70 0.9.0	125
10.71 0.8.15	126
10.72 0.8.14	126
10.73 0.8.13	126
10.74 0.8.12	126
10.75 0.8.11	126
10.76 0.8.10	127
10.77 0.8.9	127
10.78 0.8.8	127
10.79 0.8.7	127
10.80 0.8.6	127
10.81 0.8.5	127
10.82 0.8.4	128
10.83 0.8.3	128
10.84 0.8.2	128
10.85 0.8.1	128
10.86 0.8.0	128
10.87 0.7.4	129
10.88 0.7.3	129
10.89 0.7.2	129
10.90 0.7.1	129
10.91 0.7.0	129
10.92 0.6.5	130
10.93 0.6.4	130
10.94 0.6.3	130
10.95 0.5.14	131

Python Module Index	133
----------------------------	------------

Index	135
--------------	------------

Autobahn|Python

Open-source (MIT) real-time framework for Web, Mobile & Internet of Things.

AutobahnPython is part of the **Autobahn** project and provides open-source implementations of

- The WebSocket Protocol
- The Web Application Messaging Protocol (WAMP)

in Python 2 and 3, running on Twisted **or** asyncio.

1.1 Autobahn Features

WebSocket allows bidirectional real-time messaging on the Web while WAMP provides applications with high-level communication abstractions (remote procedure calling and publish/subscribe) in an open standard WebSocket-based protocol.

AutobahnPython features:

- framework for WebSocket and WAMP clients
 - compatible with Python 2.7 and 3.3+
 - runs on CPython, PyPy and Jython
 - runs under Twisted and asyncio
 - implements WebSocket RFC6455 (and draft versions Hybi-10+)
 - implements WebSocket compression
-

- implements [WAMP](#), the Web Application Messaging Protocol
- supports TLS (secure WebSocket) and proxies
- Open-source ([MIT license](#))

... and much more.

Further, **Autobahn**Python is written with these goals:

1. high-performance, fully asynchronous and scalable code
2. best-in-class standards conformance and security

We do take those design and implementation goals quite serious. For example, **Autobahn**Python has 100% strict passes with [AutobahnTestsuite](#), the quasi industry standard of WebSocket protocol test suites we originally created only to test **Autobahn**Python ;)


For (hopefully) current test reports from the Testsuite see

- [WebSocket client functionality](#)
- [WebSocket server functionality](#)

Note: In the following, we will just refer to **Autobahn** instead of the more precise term **Autobahn**Python and there is no ambiguity.

1.2 What can I do with Autobahn?

WebSocket is great for apps like **chat**, **trading**, **multi-player games** or **real-time charts**. It allows you to **actively push information** to clients as it happens. (See also *Automatically Run All Examples*)

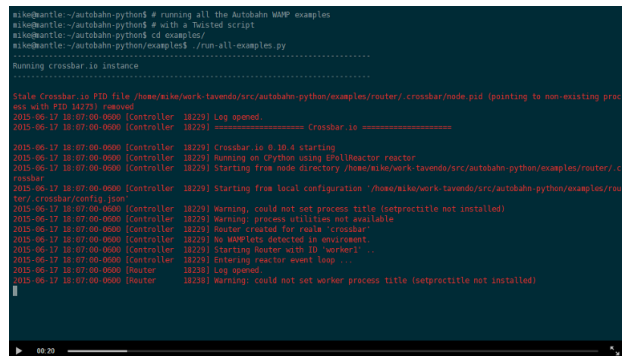

```
alice@antile:~/autobahn-python$ # running all the Autobahn WAMP examples
alice@antile:~/autobahn-python$ # with a Twisted script
alice@antile:~/autobahn-python$ cd examples/
alice@antile:~/autobahn-python/examples$ ./run-all-examples.py
.....
Running crossbar.io instance
.....
State: crossbar.io PID file /home/alice/work/tavendo/src/autobahn-python/examples/router/crossbar/node.pid (pointing to non-existing proc
ess with PID 14271) removed
2015-06-17 18:07:00-0000 [Controller 18220] Log opened.
2015-06-17 18:07:00-0000 [Controller 18220] ===== crossbar.io =====
2015-06-17 18:07:00-0000 [Controller 18220] crossbar.io 8.10.4 starting
2015-06-17 18:07:00-0000 [Controller 18220] Running on Python using EpollReactor reactor
2015-06-17 18:07:00-0000 [Controller 18220] Starting from node directory /home/alice/work/tavendo/src/autobahn-python/examples/router/c
rossbar
2015-06-17 18:07:00-0000 [Controller 18220] Starting from local configuration /home/alice/work/tavendo/src/autobahn-python/examples/rou
ter/crossbar/config.json
2015-06-17 18:07:00-0000 [Controller 18220] Warning: could not set process title (setproctitle not installed)
2015-06-17 18:07:00-0000 [Controller 18220] Warning: process utilities not available
2015-06-17 18:07:00-0000 [Controller 18220] Router created for realm 'crossbar'
2015-06-17 18:07:00-0000 [Controller 18220] No workers detected in environment
2015-06-17 18:07:00-0000 [Controller 18220] Starting Router with ID 'workers' ..
2015-06-17 18:07:00-0000 [Controller 18220] Entering reactor event loop ...
2015-06-17 18:07:00-0000 [Router 18220] Log opened.
2015-06-17 18:07:00-0000 [Router 18220] Warning: could not set worker process title (setproctitle not installed)
```

Further, WebSocket allows you to real-time enable your Web user interfaces: **always current information** without reloads or polling. UIs no longer need to be a boring, static thing. Looking for the right communication technology for your next-generation Web apps? Enter WebSocket.

And WebSocket works great not only on the Web, but also as a protocol for wiring up the **Internet-of-Things (IoT)**. Connecting a sensor or actor to other application components in real-time over an efficient protocol. Plus: you are using the *same* protocol to connect frontends like Web browsers.

While WebSocket already is quite awesome, it is still low-level. Which is why we have WAMP. WAMP allows you to **compose your application from loosely coupled components** that talk in real-time with each other - using nice high-level communication patterns (“Remote Procedure Calls” and “Publish & Subscribe”).

WAMP enables application architectures with application code **distributed freely across processes and devices** according to functional aspects. Since WAMP implementations exist for **multiple languages**, WAMP applications can be

polyglot. Application components can be implemented in a language and run on a device which best fit the particular use case.

WAMP is a routed protocol, so you need a WAMP router. We suggest using [Crossbar.io](#), but there are also [other implementations](#) available.

More:

- [WebSocket - Why, what, and - can I use it?](#)
- [Why WAMP?](#)

1.3 Show me some code!

A sample **WebSocket server**:

```
from autobahn.twisted.websocket import WebSocketServerProtocol
# or: from autobahn.asyncio.websocket import WebSocketServerProtocol

class MyServerProtocol(WebSocketServerProtocol):

    def onConnect(self, request):
        print("Client connecting: {}".format(request.peer))

    def onOpen(self):
        print("WebSocket connection open.")

    def onMessage(self, payload, isBinary):
        if isBinary:
            print("Binary message received: {} bytes".format(len(payload)))
        else:
            print("Text message received: {}".format(payload.decode('utf8')))

        ## echo back message verbatim
        self.sendMessage(payload, isBinary)

    def onClose(self, wasClean, code, reason):
        print("WebSocket connection closed: {}".format(reason))
```

Complete example code:

- [WebSocket Echo \(Twisted-based\)](#)
- [WebSocket Echo \(Asyncio-based\)](#)

Introduction to WebSocket Programming with Autobahn:

- [WebSocket Programming](#)

A sample **WAMP application component** implementing all client roles:

```
from autobahn.twisted.component import Component
# or: from autobahn.asyncio.component import Component

demo = Component(
    transports=[u"wss://demo.crossbar.io/ws"],
)
```

(continues on next page)

(continued from previous page)

```
# 1. subscribe to a topic
@demo.subscribe(u'com.myapp.hello')
def hello(msg):
    print("Got hello: {}".format(msg))

# 2. register a procedure for remote calling
@demo.register(u'com.myapp.add2')
def add2(x, y):
    return x + y

# 3. after we've authenticated, run some code
@demo.on_join
async def joined(session, details):
    # publish an event (won't go to "this" session by default)
    await session.publish('com.myapp.hello', 'Hello, world!')

    # 4. call a remote procedure
    result = await session.call('com.myapp.add2', 2, 3)
    print("com.myapp.add2(2, 3) = {}".format(result))

if __name__ == "__main__":
    run([demo])
```

Complete example code:

- [Twisted Example](#)
- [asyncio Example](#)

Introduction to WAMP Programming with Autobahn:

- [WAMP Programming](#)
-

1.4 Where to start

To get started, jump to *Installation*.

For developers new to asynchronous programming, Twisted or asyncio, we've collected some useful pointers and information in *Asynchronous Programming*.

For **WebSocket developers**, *WebSocket Programming* explains all you need to know about using Autobahn as a WebSocket library, and includes a full reference for the relevant parts of the API.

WebSocket Examples lists WebSocket code examples covering a broader range of uses cases and advanced WebSocket features.

For **WAMP developers**, *WAMP Programming* gives an introduction for programming with WAMP in Python using Autobahn.

WAMP Examples lists WAMP code examples covering all features of WAMP.

1.5 Get in touch

Development of Autobahn takes place on the [GitHub source repository](#).

Note: We are open for contributions, whether that's code or documentation! Preferably via pull requests.

We also take **bug reports** at the [issue tracker](#).

The best place to **ask questions** is on the [mailing list](#). We'd also love to hear about your project and what you are using Autobahn for!

Another option is [StackOverflow](#) where [questions](#) related to Autobahn are tagged “autobahn” (or “autobahnws”).

The best way to **Search the Web** for related material is by using these (base) search terms:

- “autobahnpython”
- “autobahnws”

You can also reach users and developers on **IRC** channel #autobahn at [freenode.net](#).

Finally, we are on [Twitter](#).

1.6 Contributing

Autobahn is an open source project, and hosted on [GitHub](#). The [GitHub repository](#) includes the documentation.

We're looking for all kinds of contributions - from simple fixes of typos in the code or documentation to implementation of new features and additions of tutorials.

If you want to contribute to the code or the documentation: we use the Fork & Pull Model.

This means that you fork the repo, make changes to your fork, and then make a pull request here on the main repo.

This [article on GitHub](#) gives more detailed information on how the process works.

In order to run the unit-tests, we use [Tox](#) to build the various test-environments. To run them all, simply run `tox` from the top-level directory of the clone.

For test-coverage, see the Makefile target `test_coverage`, which deletes the coverage data and then runs the test suite with various tox test-environments before outputting HTML annotated coverage to `./htmlcov/index.html` and a coverage report to the terminal.

There are two environment variables the tests use: `USE_TWISTED=1` or `USE_ASYNCIO=1` control whether to run unit-tests that are specific to one framework or the other.

See `tox.ini` for details on how to run in the different environments.

1.7 Release Testing

Before pushing a new release, three levels of tests need to pass:

1. the unit tests (see above)
2. the [WebSocket level tests](wstest/README.md)
3. the [WAMP level tests](examples/README.md) (*)

> (*): these will launch a Crossbar.io router for testing

1.8 Sitemap

Please see *Site Contents* for a full site-map.

This document describes the prerequisites and the installation of **Autobahn**.

2.1 Requirements

Autobahn runs on Python on top of these networking frameworks:

- [Twisted](#)
- [asyncio](#)

You will need at least one of those.

Note: Most of Autobahn's WebSocket and WAMP features are available on both Twisted and asyncio, so you are free to choose the underlying networking framework based on your own criteria.

For Twisted installation, please see [here](#). Asyncio comes bundled with Python 3.4+. For Python 3.3, install it from [here](#). For Python 2, [trollius](#) will work.

2.1.1 Supported Configurations

Here are the configurations supported by Autobahn:

Python	Twisted	asyncio	Notes
CPython 2.7	yes	yes	asyncio support via trollius
CPython 3.3	yes	yes	asyncio support via tulip
CPython 3.4+	yes	yes	asyncio in the standard library
PyPy 2.2+	yes	yes	asyncio support via trollius
Jython 2.7+	yes	?	Issues: 1 , 2

2.1.2 Performance Note

Autobahn is portable, well tuned code. You can further accelerate performance by

- Running under [PyPy](#) (recommended!) or
- on CPython, install the native accelerators [wsaccel](#) and [ujson](#) (you can use the install variant `acceleration` for that - see below)

To give you an idea of the performance you can expect, here is a [blog post](#) benchmarking Autobahn running on the [RaspberryPi](#) (a tiny embedded computer) under [PyPy](#).

2.2 Installing Autobahn

2.2.1 Using Docker

We offer [Docker Images](#) with Autobahn pre-installed. To use this, if you have Docker already installed, just do

```
sudo docker run -it crossbario/autobahn-python:cpy2 python client.py
--url ws://IP_of_WAMP_router:8080/ws --realm realm1
```

This starts up a Docker container and `client.py`, which connects to a Crossbar.io router at the given URL and to the given realm.

There are several docker images to choose from, depending on whether you are using Python 2, 3 or PyPy (Python 2 only for now).

There are the flavors which are based on the official Python 2, 3 and PyPy images, plus Python 2 and 3 versions using Alpine Linux, which have a smaller footprint. (Note: Footprint only matters for the download once per machine, after that the cached image is used. Containers off the same image/layers only take up space corresponding to how different from the image they are, so image size is relatively less important when using multiple containers.)

2.2.2 Install from PyPI

To install Autobahn from the [Python Package Index](#) using [Pip](#)

```
pip install autobahn
```

You can also specify *install variants* (see below). E.g. to install Twisted automatically as a dependency

```
pip install autobahn[twisted]
```

And to install asyncio backports automatically when required

```
pip install autobahn[asyncio]
```

2.2.3 Install from Sources

To install from sources, clone the repository:

```
git clone git@github.com:crossbario/autobahn-python.git
```

checkout a tagged release:


```
cd AutobahnPython
git checkout v0.9.1
```

Warning: You should only use *tagged* releases, not *master*. The latest code from *master* might be broken, unfinished and untested. So you have been warned ;)

Then do:

```
cd autobahn
python setup.py install
```

You can also use `pip` for the last step, which allows to specify install variants (see below)

```
pip install -e .[twisted]
```

2.2.4 Install Variants

Autobahn has the following install variants:

Variant	Description
twisted	Install Twisted as a dependency
asyncio	Install asyncio as a dependency (or use stdlib)
accelerate	Install native acceleration packages on CPython
compress	Install packages for non-standard WebSocket compression methods
serialization	Install packages for additional WAMP serialization formats (currently MsgPack)

Install variants can be combined, e.g. to install Autobahn with all optional packages for use with Twisted on CPython:

```
pip install autobahn[twisted,accelerate,compress,serialization]
```

2.2.5 Windows Installation

For convenience, here are minimal instructions to install both Python and Autobahn/Twisted on Windows:

1. Go to the [Python web site](#) and install Python 2.7 32-Bit
2. Add `C:\Python27;C:\Python27\Scripts;` to your PATH
3. Download the [Pip install script](#) and double click it (or run `python get-pip.py` from a command shell)
4. Open a command shell and run `pip install autobahn[twisted]`

2.3 Check the Installation

To check the installation, fire up the Python and run

```
>>> from autobahn import __version__
>>> print(__version__)
0.9.1
```

2.4 Depending on Autobahn

To require **Autobahn** as a dependency of your package, include the following in your `setup.py` script

```
install_requires = ["autobahn>=0.9.1"]
```

You can also depend on an *install variant* which automatically installs dependent packages

```
install_requires = ["autobahn[twisted]>=0.9.1"]
```

The latter will automatically install Twisted as a dependency.

Where to go

Now you've got **Autobahn** installed, depending on your needs, head over to

- *Asynchronous Programming* - An very short introduction plus pointers to good Web resources.
- *WebSocket Programming* - A guide to programming WebSocket applications with Autobahn
- *WAMP Programming* - A guide to programming WAMP applications with Autobahn

Asynchronous Programming

3.1 Introduction

3.1.1 The asynchronous programming approach

Autobahn is written according to a programming paradigm called *asynchronous programming* (or *event driven programming*) and implemented using *non-blocking* execution - and both go hand in hand.

A very good technical introduction to these concepts can be found in [this chapter](#) of an “Introduction to Asynchronous Programming and Twisted”.

Here are two more presentations that introduce event-driven programming in Python

- [Alex Martelli - Don't call us, we'll call you: callback patterns and idioms](#)
- [Glyph Lefkowitz - So Easy You Can Even Do It in JavaScript: Event-Driven Architecture for Regular Programmers](#)

Another highly recommended reading is [The Reactive Manifesto](#) which describes guiding principles, motivations and connects the dots

Non-blocking means the ability to make continuous progress in order for the application to be responsive at all times, even under failure and burst scenarios. For this all resources needed for a response—for example CPU, memory and network—must not be monopolized. As such it can enable both lower latency, higher throughput and better scalability.

—The Reactive Manifesto

The fact that **Autobahn** is implemented using asynchronous programming and non-blocking execution shouldn't come as a surprise, since both [Twisted](#) and [asyncio](#) - the foundations upon which Autobahn runs - are *asynchronous network programming frameworks*.

On the other hand, the principles of asynchronous programming are independent of Twisted and asyncio. For example, other frameworks that fall into the same category are:

- [NodeJS](#)

- Boost/ASIO
- Netty
- Tornado
- React

Tip: While getting accustomed to the asynchronous way of thinking takes some time and effort, the knowledge and experience acquired can be translated more or less directly to other frameworks in the asynchronous category.

3.1.2 Other forms of Concurrency

Asynchronous programming is not the only approach to concurrency. Other styles of concurrency include

1. OS Threads
2. Green Threads
3. Actors
4. Software Transactional Memory (STM)

Obviously, we cannot go into much detail with all of above. But here are some pointers for further reading if you want to compare and contrast asynchronous programming with other approaches.

With the **Actor model** a system is composed of a set of *actors* which are independently running, executing sequentially and communicate strictly by message passing. There is no shared state at all. This approach is used in systems like

- Erlang
- Akka
- Rust
- C++ Actor Framework

Software Transactional Memory (STM) applies the concept of **Optimistic Concurrency Control** from the persistent database world to (transient) program memory. Instead of letting programs directly modify memory, all operations are first logged (inside a transaction), and then applied atomically - but only if no conflicting transaction has committed in the meantime. Hence, it's "optimistic" in that it assumes to be able to commit "normally", but needs to handle the failing at commit time.

Green Threads is using light-weight, run-time level threads and thread scheduling instead of OS threads. Other than that, systems are implemented similar: green threads still block, and still do share state. Python has multiple efforts in this category:

- Eventlet
- Gevent
- Stackless

3.1.3 Twisted or asyncio?

Since **Autobahn** runs on both Twisted and asyncio, which networking framework should you use?

Even more so, as the core of Twisted and asyncio is very similar and relies on the same concepts:

Twisted	asyncio	Description
Deferred	Future	abstraction of a value which isn't available yet
Reactor	Event Loop	waits for and dispatches events
Transport	Transport	abstraction of a communication channel (stream or datagram)
Protocol	Protocol	this is where actual networking protocols are implemented
Protocol Factory	Protocol Factory	responsible for creating protocol instances

In fact, I'd say the biggest difference between Twisted and asyncio is `Deferred` vs `Future`. Although similar on surface, their semantics are different. `Deferred` supports the concept of chainable callbacks (which can mutate the return values), and separate error-backs (which can cancel errors). `Future` has just a callback, that always gets a single argument: the `Future`.

Also, asyncio is opinionated towards co-routines. This means idiomatic user code for asyncio is expected to use co-routines, and not plain Futures (which are considered too low-level for application code).

But anyway, with asyncio being part of the language standard library (since Python 3.4), wouldn't you just *always* use asyncio? At least if you don't have a need to support already existing Twisted based code.

The truth is that while the *core* of Twisted and asyncio are very similar, **Twisted has a much broader scope: Twisted is "batteries included" for network programming.**

So you get *tons* of actual network protocols already out-of-the-box - in production quality implementations!

asyncio does not include any actual application layer network protocols like HTTP. If you need those, you'll have to look for asyncio implementations *outside* the standard library. For example, [here](#) is a HTTP server and client library for asyncio.

Over time, an ecosystem of protocols will likely emerge around asyncio also. But right now, Twisted has a big advantage here.

If you want to read more on this, Glyph (Twisted original author) has a nice blog post [here](#).

3.2 Resources

Below we are listing a couple of resources on the Web for Twisted and asyncio that you may find useful.

3.2.1 Twisted Resources

We cannot give an introduction to asynchronous programming with Twisted here. And there is no need to, since there is lots of great stuff on the Web. In particular we'd like to recommend the following resources.

If you have limited time and nevertheless want to have an in-depth view of Twisted, Jessica McKellar has a great presentation recording with [Architecting an event-driven networking engine: Twisted Python](#). That's 45 minutes. Highly recommended.

If you really want to get it, Dave Peticolas has written an awesome [Introduction to Asynchronous Programming and Twisted](#). This is a detailed, hands-on tutorial with lots of code examples that will take some time to work through - but you actually *learn* how to program with Twisted.

Then of course there is

- [The Twisted Documentation](#)
- [The Twisted API Reference](#)

and lots and lots of awesome [Twisted talks](#) on PyVideo.

3.2.2 Asyncio Resources

asyncio is very new (August 2014). So the amount of material on the Web is still limited. Here are some resources you may find useful:

- [Guido van Rossum's Keynote at PyCon US 2013](#)
- [Tulip: Async I/O for Python 3](#)
- [Python 3.4 docs - asyncio](#)
- [PEP-3156 - Asynchronous IO Support Rebooted](#)
- [OSB 2015 - How Do Python Coroutines Work? - A. Jesse Jiryu Davis](#)

However, we quickly introduce core asynchronous programming primitives provided by [Twisted](#) and [asyncio](#):

3.3 Asynchronous Programming Primitives

In this section, we have a quick look at some of the asynchronous programming primitive provided by Twisted and asyncio to show similarities and differences.

3.3.1 Twisted Deferreds and inlineCallbacks

Documentation pointers:

- [Introduction to Deferreds](#)
- [Deferreds Reference](#)
- [Twisted inlineCallbacks](#)

Programming with Twisted Deferreds involves attaching *callbacks* to Deferreds which get called when the Deferred finally either resolves successfully or fails with an error

```
d = some_function() # returns a Twisted Deferred ..
def on_success(res):
    print("result: {}".format(res))
def on_error(err):
    print("error: {}".format(err))
d.addCallbacks(on_success, on_error)
```

Using Deferreds offers the greatest flexibility since you are able to pass around Deferreds freely and can run code concurrently.

However, using plain Deferreds comes at a price: code in this style looks very different from synchronous/blocking code and the code can become hard to follow.

Now, [Twisted inlineCallbacks](#) let you write code in a sequential looking manner that nevertheless executes asynchronously and non-blocking under the hood.

So converting above snippet to `inlineCallbacks` the code will look like

```

try:
    res = yield some_function()
    print("result: {}".format(res))
except Exception as err:
    print("error: {}".format(err))

```

As you can see, this code looks very similar to regular synchronous/blocking Python code. The only difference (on surface) is the use of `yield` when calling a function that runs asynchronously. Otherwise, you process success result values and exceptions exactly as with regular code.

Note: We'll only show basic usage here - for a more basic and complete introduction, please have a look at [this chapter](#) from [this tutorial](#).

Example

The following demonstrates basic usage of `inlineCallbacks` in a complete example you can run.

First, consider this program using `Deferreds`. We simulate calling a slow function by sleeping (without blocking) inside the function `slow_square`

```

1 from twisted.internet import reactor
2 from twisted.internet.defer import Deferred
3
4 def slow_square(x):
5     d = Deferred()
6
7     def resolve():
8         d.callback(x * x)
9
10    reactor.callLater(1, resolve)
11    return d
12
13 def test():
14     d = slow_square(3)
15
16     def on_success(res):
17         print(res)
18         reactor.stop()
19
20     d.addCallback(on_success)
21
22 test()
23 reactor.run()

```

This is just regular Twisted code - nothing exciting here:

1. We create a `Deferred` to be returned by our `slow_square` function (line 5)
2. We create a function `resolve` (a closure) in which we resolve the previously created `Deferred` with the result (lines 7-8)
3. Then we ask the Twisted reactor to call `resolve` after 1 second (line 10)
4. And we return the previously created `Deferred` to the caller (line 11)

What you can see even with this trivial example already is that the code looks quite differently from synchronous/blocking code. It needs some practice until such code becomes natural to read.

Now, when converted to `inlineCallbacks`, the code becomes:

```

1 from twisted.internet import reactor
2 from twisted.internet.defer import inlineCallbacks, returnValue
3 from autobahn.twisted.util import sleep
4
5 @inlineCallbacks
6 def slow_square(x):
7     yield sleep(1)
8     returnValue(x * x)
9
10 @inlineCallbacks
11 def test():
12     res = yield slow_square(3)
13     print(res)
14     reactor.stop()
15
16 test()
17 reactor.run()

```

Have a look at the highlighted lines - here is what we do:

1. Decorating our squaring function with `inlineCallbacks` (line 5). Doing so marks the function as a coroutine which allows us to use this sequential looking coding style.
2. Inside the function, we simulate the slow execution by sleeping for a second (line 7). However, we are sleeping in a non-blocking way (`autobahn.twisted.util.sleep()`). The `yield` will put the coroutine aside until the sleep returns.
3. To return values from Twisted coroutines, we need to use `returnValue` (line 8).

Note: The reason `returnValue` is necessary goes deep into implementation details of Twisted and Python. In short: co-routines in Python 2 with Twisted are simulated using exceptions. Only Python 3.3+ has gotten native support for co-routines using the new `yield from` statement, Python 3.5+ use `await` statement and it is the new recommended method.

In above, we are using a little helper `autobahn.twisted.util.sleep()` for sleeping “inline”. The helper is really trivial:

```

from twisted.internet import reactor
from twisted.internet.defer import Deferred

def sleep(delay):
    d = Deferred()
    reactor.callLater(delay, d.callback, None)
    return d

```

The rest of the program is just for driving our test function and running a Twisted reactor.

3.3.2 Asyncio Futures and Coroutines

[Asyncio Futures](#) like Twisted `Deferreds` encapsulate the result of a future computation. At the time of creation, the result is (usually) not yet available, and will only be available eventually.

On the other hand, asyncio futures are quite different from Twisted `Deferreds`. One difference is that they have no built-in machinery for chaining.

Asyncio Coroutines are (on a certain level) quite similar to Twisted inline callbacks. Here is the code corresponding to our example above:

Example

The following demonstrates basic usage of `asyncio.coroutine` in a complete example you can run.

First, consider this program using plain `asyncio.Future`. We simulate calling a slow function by sleeping (without blocking) inside the function `slow_square`

```

1  import asyncio
2
3  def slow_square(x):
4      f = asyncio.Future()
5
6      def resolve():
7          f.set_result(x * x)
8
9      loop = asyncio.get_event_loop()
10     loop.call_later(1, resolve)
11
12     return f
13
14 def test():
15     f = slow_square(3)
16
17     def done(f):
18         res = f.result()
19         print(res)
20
21     f.add_done_callback(done)
22
23     return f
24
25 loop = asyncio.get_event_loop()
26 loop.run_until_complete(test())
27 loop.close()

```

Using `asyncio` in this way is probably quite unusual. This is because `asyncio` is opinionated towards using coroutines from the beginning. Anyway, here is what above code does:

1. We create a `Future` to be returned by our `slow_square` function (line 4)
2. We create a function `resolve` (a closure) in which we resolve the previously created `Future` with the result (lines 6-7)
3. Then we ask the `asyncio` event loop to call `resolve` after 1 second (line 10)
4. And we return the previously created `Future` to the caller (line 12)

What you can see even with this trivial example already is that the code looks quite differently from synchronous/blocking code. It needs some practice until such code becomes natural to read.

Now, when converted to `asyncio.coroutine`, the code becomes:

```

1  import asyncio
2
3  async def slow_square(x):
4      await asyncio.sleep(1)

```

(continues on next page)

(continued from previous page)

```
5     return x * x
6
7
8 async def test():
9     res = await slow_square(3)
10    print(res)
11
12 loop = asyncio.get_event_loop()
13 loop.run_until_complete(test())
```

The main differences (on surface) are:

1. The declaration of the function with `async` keyword (line 3) in `asyncio` versus the decorator `@defer.inlineCallbacks` with `Twisted`
2. The use of `defer.returnValue` in `Twisted` for returning values whereas in `asyncio`, you can use plain returns (line 6)
3. The use of `await` in `asyncio`, versus `yield` in `Twisted` (line 5)
4. The auxiliary code to get the event loop started and stopped

Most of the examples that follow will show code for both `Twisted` and `asyncio`, unless the conversion is trivial.

WebSocket Programming

This guide introduces WebSocket programming with **Autobahn**.

You'll see how to create WebSocket server (“*Creating Servers*”) and client applications (“*Creating Clients*”).

Resources:

- Example Code for this Guide: [Twisted-based](#) or [asyncio-based](#)
- More [WebSocket Examples](#)

4.1 Creating Servers

Using **Autobahn** you can create WebSocket servers that will be able to talk to any (compliant) WebSocket client, including browsers.

We'll cover how to define the behavior of your WebSocket server by writing *protocol classes* and show some boilerplate for actually running a WebSocket server using the behavior defined in the server protocol.

4.1.1 Server Protocols

To create a WebSocket server, you need to **write a protocol class to specify the behavior** of the server.

For example, here is a protocol class for a WebSocket echo server that will simply echo back any WebSocket message it receives:

```
class MyServerProtocol(WebSocketServerProtocol):  
  
    def onMessage(self, payload, isBinary):  
        ## echo back message verbatim  
        self.sendMessage(payload, isBinary)
```

This is just three lines of code, but we will go through each one carefully, since writing protocol classes like above really is core to WebSocket programming using Autobahn.

The **first thing** to note is that you **derive** your protocol class from a base class provided by Autobahn. Depending on whether you write a Twisted or a asyncio based application, here are the base classes to derive from:

- `autobahn.twisted.websocket.WebSocketServerProtocol`
- `autobahn.asyncio.websocket.WebSocketServerProtocol`

So a Twisted-based echo protocol would import the base protocol from `autobahn.twisted.websocket` and derive from `autobahn.twisted.websocket.WebSocketServerProtocol`

Twisted:

```
from autobahn.twisted.websocket import WebSocketServerProtocol

class MyServerProtocol(WebSocketServerProtocol):

    def onMessage(self, payload, isBinary):
        ## echo back message verbatim
        self.sendMessage(payload, isBinary)
```

while an asyncio echo protocol would import the base protocol from `autobahn.asyncio.websocket` and derive from `autobahn.asyncio.websocket.WebSocketServerProtocol`

asyncio:

```
from autobahn.asyncio.websocket import WebSocketServerProtocol

class MyServerProtocol(WebSocketServerProtocol):

    def onMessage(self, payload, isBinary):
        ## echo back message verbatim
        self.sendMessage(payload, isBinary)
```

Note: In this example, only the imports differ between the Twisted and the asyncio variant. The rest of the code is identical. However, in most real world programs you probably won't be able to or don't want to avoid using network framework specific code.

4.1.2 Receiving Messages

The **second thing** to note is that we **override a callback** `onMessage` which is called by Autobahn whenever the callback related event happens.

In case of `onMessage`, the callback will be called whenever a new WebSocket message was received. There are more WebSocket related callbacks, but for now the `onMessage` callback is all we need.

When our server receives a WebSocket message, the `autobahn.websocket.interfaces.IWebSocketChannel.onMessage()` will fire with the message payload received.

The payload is always a Python byte string. Since WebSocket is able to transmit **text** (UTF8) and **binary** payload, the actual payload type is signaled via the `isBinary` flag.

When the payload is **text** (`isBinary == False`), the bytes received will be an UTF8 encoded string. To process **text** payloads, the first thing you often will do is decoding the UTF8 payload into a Python string:

```
s = payload.decode('utf8')
```

Tip: You don't need to validate the bytes for actually being valid UTF8 - Autobahn does that already when receiving the message.

When using WebSocket text messages with JSON `payload`, typical code for receiving and decoding messages into Python objects that works on both Python 2 and 3 would look like this:

```
import json
obj = json.loads(payload.decode('utf8'))
```

We are using the Python standard JSON module `json`.

The `payload` (which is of type `bytes` on Python 3 and `str` on Python 2) is decoded from UTF8 into a native Python string, and then parsed from JSON into a native Python object.

4.1.3 Sending Messages

The **third thing** to note is that we **use methods** like `sendMessage` provided by the base class to perform WebSocket related actions, like sending a WebSocket message.

As there are more methods for performing other actions (like closing the connection), we'll come back to this later, but for now, the `sendMessage` method is all we need.

`autobahn.websocket.interfaces.IWebSocketChannel.sendMessage()` takes the payload to send in a WebSocket message as Python bytes. Since WebSocket is able to transmit payloads of **text** (UTF8) and **binary** type, you need to tell Autobahn the actual type of the `payload` bytes. This is done using the `isBinary` flag.

Hence, to send a WebSocket text message, you will usually *encode* the payload to UTF8:

```
payload = s.encode('utf8')
self.sendMessage(payload, isBinary = False)
```

Warning: Autobahn will NOT validate the bytes of a text `payload` being sent for actually being valid UTF8. You **MUST** ensure that you only provide valid UTF8 when sending text messages. If you produce invalid UTF8, a conforming WebSocket peer will close the WebSocket connection due to the protocol violation.

When using WebSocket text messages with JSON `payload`, typical code for encoding and sending Python objects that works on both Python 2 and 3 would look like this:

```
import json
payload = json.dumps(obj, ensure_ascii = False).encode('utf8')
```

We are using the Python standard JSON module `json`.

The `ensure_ascii == False` option allows the JSON serializer to use Unicode strings. We can do this since we are encoding to UTF8 afterwards anyway. And UTF8 can represent the full Unicode character set.

4.1.4 Running a Server

Now that we have defined the behavior of our WebSocket server in a protocol class, we need to actually start a server based on that behavior.

Doing so involves two steps:

1. Create a **Factory** for producing instances of our protocol class
2. Create a TCP **listening server** using the former Factory

Here is one way of doing that when using Twisted

Twisted:

```
if __name__ == '__main__':

    import sys

    from twisted.python import log
    from twisted.internet import reactor
    log.startLogging(sys.stdout)

    from autobahn.twisted.websocket import WebSocketServerFactory
    factory = WebSocketServerFactory()
    factory.protocol = MyServerProtocol

    reactor.listenTCP(9000, factory)
    reactor.run()
```

What we are doing here is

1. Setup Twisted logging
2. Create a `autobahn.twisted.websocket.WebSocketServerFactory` and set our `MyServerProtocol` on the factory (the highlighted lines)
3. Start a server using the factory, listening on TCP port 9000

Similar, here is the asyncio way

asyncio:

```
if __name__ == '__main__':

    try:
        import asyncio
    except ImportError:
        ## Trollius >= 0.3 was renamed
        import trollius as asyncio

    from autobahn.asyncio.websocket import WebSocketServerFactory
    factory = WebSocketServerFactory()
    factory.protocol = MyServerProtocol

    loop = asyncio.get_event_loop()
    coro = loop.create_server(factory, '127.0.0.1', 9000)
    server = loop.run_until_complete(coro)

    try:
        loop.run_forever()
```

(continues on next page)

(continued from previous page)

```

except KeyboardInterrupt:
    pass
finally:
    server.close()
    loop.close()

```

What we are doing here is

1. Import `asyncio`, or the Trollius backport
2. Create a `autobahn.asyncio.websocket.WebSocketServerFactory` and set our `MyServerProtocol` on the factory (the highlighted lines)
3. Start a server using the factory, listening on TCP port 9000

Note: As can be seen, the boilerplate to create and run a server differ from Twisted, but the core code of creating a factory and setting our protocol (the highlighted lines) is identical (other than the differing import for the `WebSocket` factory).

You can find complete code for above examples here:

- [WebSocket Echo \(Twisted-based\)](#)
- [WebSocket Echo \(Asyncio-based\)](#)

4.2 Connection Lifecycle

As we have seen above, Autobahn will fire *callbacks* on your protocol class whenever the event related to the respective callback occurs.

It is in these callbacks that you will implement application specific code.

The core `WebSocket` interface `autobahn.websocket.interfaces.IWebSocketChannel` provides the following *callbacks*:

- `autobahn.websocket.interfaces.IWebSocketChannel.onConnect()`
- `autobahn.websocket.interfaces.IWebSocketChannel.onConnecting()`
- `autobahn.websocket.interfaces.IWebSocketChannel.onOpen()`
- `autobahn.websocket.interfaces.IWebSocketChannel.onMessage()`
- `autobahn.websocket.interfaces.IWebSocketChannel.onClose()`

We have already seen the callback for *Receiving Messages*. This callback will usually fire many times during the lifetime of a `WebSocket` connection.

In contrast, the other four callbacks above each only fires once for a given connection.

4.2.1 Opening Handshake

Whenever a new client connects to the server, a new protocol instance will be created and the `autobahn.websocket.interfaces.IWebSocketChannel.onConnect()` callback fires as soon as the `WebSocket` opening handshake is begun by the client.

For a WebSocket server protocol, `onConnect()` will fire with `autobahn.websocket.protocol.ConnectionRequest` providing information on the client wishing to connect via WebSocket.

```
class MyServerProtocol (WebSocketServerProtocol):  
  
    def onConnect (self, request):  
        print ("Client connecting: {}".format (request.peer))
```

For a WebSocket client protocol, `onConnecting()` is called immediately before the handshake to the server starts. It is called with some details about the underlying transport. This may return `None` (the default) to get default values for several options (which are gotten from the Factory) or it may return a `autobahn.websocket.types.ConnectingRequest` instance to indicate options for this handshake. This allows using different options on each request (as opposed to using a static set of options in the Factory).

Then, once the server has responded, a WebSocket client protocol will fire `onConnect()` with a `autobahn.websocket.protocol.ConnectionResponse` providing information on the WebSocket connection that was accepted by the server.

```
class MyClientProtocol (WebSocketClientProtocol):  
  
    def onConnect (self, response):  
        print ("Connected to Server: {}".format (response.peer))
```

In this callback you can do things like

- checking or setting cookies or other HTTP headers
- verifying the client IP address
- checking the origin of the WebSocket request
- negotiate WebSocket subprotocols

For example, a WebSocket client might offer to speak several WebSocket subprotocols. The server can inspect the offered protocols in `onConnect()` via the supplied instance of `autobahn.websocket.protocol.ConnectionRequest`. When the server accepts the client, it'll chose one of the offered subprotocols. The client can then inspect the selected subprotocol in it's `onConnect()` callback in the supplied instance of `autobahn.websocket.protocol.ConnectionResponse`.

4.2.2 Connection Open

The `autobahn.websocket.interfaces.IWebSocketChannel.onOpen()` callback fires when the WebSocket opening handshake has been successfully completed. You now can send and receive messages over the connection.

```
class MyProtocol (WebSocketProtocol):  
  
    def onOpen (self):  
        print ("WebSocket connection open.")
```

4.2.3 Closing a Connection

The core WebSocket interface `autobahn.websocket.interfaces.IWebSocketChannel` provides the following *methods*:

- `autobahn.websocket.interfaces.IWebSocketChannel.sendMessage()`

- `autobahn.websocket.interfaces.IWebSocketChannel.sendClose()`

We've already seen one of above in *Sending Messages*.

The `autobahn.websocket.interfaces.IWebSocketChannel.sendClose()` will initiate a WebSocket closing handshake. After starting to close a WebSocket connection, no messages can be sent. Eventually, the `autobahn.websocket.interfaces.IWebSocketChannel.onClose()` callback will fire.

After a WebSocket connection has been closed, the protocol instance will get recycled. Should the client reconnect, a new protocol instance will be created and a new WebSocket opening handshake performed.

4.2.4 Connection Close

When the WebSocket connection has closed, the `autobahn.websocket.interfaces.IWebSocketChannel.onClose()` callback fires.

```
class MyProtocol(WebSocketProtocol):
    def onClose(self, wasClean, code, reason):
        print("WebSocket connection closed: {}".format(reason))
```

When the connection has closed, no messages will be received anymore and you cannot send messages also. The protocol instance won't be reused. It'll be garbage collected. When the client reconnects, a completely new protocol instance will be created.

4.3 Creating Clients

Note: Creating WebSocket clients using **Autobahn** works very similar to creating WebSocket servers. Hence you should have read through *Creating Servers* first.

As with servers, the behavior of your WebSocket client is defined by writing a *protocol class*.

4.3.1 Client Protocols

To create a WebSocket client, you need to write a protocol class to **specify the behavior** of the client.

For example, here is a protocol class for a WebSocket client that will send a WebSocket text message as soon as it is connected and log any WebSocket messages it receives:

```
class MyClientProtocol(WebSocketClientProtocol):
    def onOpen(self):
        self.sendMessage(u"Hello, world!".encode('utf8'))
    def onMessage(self, payload, isBinary):
        if isBinary:
            print("Binary message received: {} bytes".format(len(payload)))
        else:
            print("Text message received: {}".format(payload.decode('utf8')))
```

Similar to WebSocket servers, you **derive** your WebSocket client protocol class from a base class provided by Autobahn. Depending on whether you write a Twisted or a asyncio based application, here are the base classes to derive from:

- `autobahn.twisted.websocket.WebSocketClientProtocol`
- `autobahn.asyncio.websocket.WebSocketClientProtocol`

So a Twisted-based protocol would import the base protocol from `autobahn.twisted.websocket` and derive from `autobahn.twisted.websocket.WebSocketClientProtocol`

Twisted:

```
from autobahn.twisted.websocket import WebSocketClientProtocol

class MyClientProtocol(WebSocketClientProtocol):

    def onOpen(self):
        self.sendMessage(u"Hello, world!".encode('utf8'))

    def onMessage(self, payload, isBinary):
        if isBinary:
            print("Binary message received: {0} bytes".format(len(payload)))
        else:
            print("Text message received: {0}".format(payload.decode('utf8')))
```

while an asyncio-based protocol would import the base protocol from `autobahn.asyncio.websocket` and derive from `autobahn.asyncio.websocket.WebSocketClientProtocol`

asyncio:

```
from autobahn.asyncio.websocket import WebSocketClientProtocol

class MyClientProtocol(WebSocketClientProtocol):

    def onOpen(self):
        self.sendMessage(u"Hello, world!".encode('utf8'))

    def onMessage(self, payload, isBinary):
        if isBinary:
            print("Binary message received: {0} bytes".format(len(payload)))
        else:
            print("Text message received: {0}".format(payload.decode('utf8')))
```

Note: In this example, only the imports differs between the Twisted and the asyncio variant. The rest of the code is identical. However, in most real world programs you probably won't be able to or don't want to avoid using network framework specific code.

Receiving and sending WebSocket messages as well as connection lifecycle in clients works exactly the same as with servers. Please see

- *Receiving Messages*
- *Sending Messages*
- *Connection Lifecycle*

4.3.2 Running a Client

Now that we have defined the behavior of our WebSocket client in a protocol class, we need to actually start a client based on that behavior.

Doing so involves two steps:

1. Create a **Factory** for producing instances of our protocol class
2. Create a TCP **connecting client** using the former Factory

Here is one way of doing that when using Twisted

Twisted:

```
if __name__ == '__main__':

    import sys

    from twisted.python import log
    from twisted.internet import reactor
    log.startLogging(sys.stdout)

    from autobahn.twisted.websocket import WebSocketClientFactory
    factory = WebSocketClientFactory()
    factory.protocol = MyClientProtocol

    reactor.connectTCP("127.0.0.1", 9000, factory)
    reactor.run()
```

What we are doing here is

1. Setup Twisted logging
2. Create a `autobahn.twisted.websocket.WebSocketClientFactory` and set our `MyClientProtocol` on the factory (the highlighted lines)
3. Start a client using the factory, connecting to localhost `127.0.0.1` on TCP port `9000`

Similar, here is the asyncio way

asyncio:

```
if __name__ == '__main__':

    try:
        import asyncio
    except ImportError:
        ## Trollius >= 0.3 was renamed
        import trollius as asyncio

    from autobahn.asyncio.websocket import WebSocketClientFactory
    factory = WebSocketClientFactory()
    factory.protocol = MyClientProtocol

    loop = asyncio.get_event_loop()
    coro = loop.create_connection(factory, '127.0.0.1', 9000)
    loop.run_until_complete(coro)
    loop.run_forever()
    loop.close()
```

What we are doing here is

1. Import asyncio, or the Trollius backport
2. Create a `autobahn.asyncio.websocket.WebSocketClientFactory` and set our `MyClientProtocol` on the factory (the highlighted lines)

3. Start a client using the factory, connecting to localhost 127.0.0.1 on TCP port 9000

Note: As can be seen, the boilerplate to create and run a client differ from Twisted, but the core code of creating a factory and setting our protocol (the highlighted lines) is identical (other than the differing import for the WebSocket factory).

You can find complete code for above examples here:

- [WebSocket Echo \(Twisted-based\)](#)
- [WebSocket Echo \(Asyncio-based\)](#)

4.4 WebSocket Options

You can pass various options on both client and server side WebSockets; these are accomplished by calling `autobahn.websocket.WebSocketServerFactory.setProtocolOptions()` or `autobahn.websocket.WebSocketClientFactory.setProtocolOptions()` with keyword arguments for each option.

4.4.1 Common Options (server and client)

- `logOctets`: if True, log every byte
- `logFrames`: if True, log information about each frame
- `trackTimings`: if True, enable debug timing code
- `utf8validateIncoming`: if True (default), validate all incoming UTF8
- `applyMask`: if True (default) apply mask to frames, when available
- `maxFramePayloadSize`: if 0 (default), unlimited-sized frames allowed
- `maxMessagePayloadSize`: if 0 (default), unlimited re-assembled payloads
- `autoFragmentSize`: if 0 (default), don't fragment
- `failByDrop`: if True (default), failed connections are terminated immediately
- `echoCloseCodeReason`: if True, echo back the close reason/code
- `openHandshakeTimeout`: timeout in seconds after which opening handshake will be failed (default: no timeout)
- `closeHandshakeTimeout`: timeout in seconds after which close handshake will be failed (default: no timeout)
- `tcpNoDelay`: if True (default), set NODELAY (Nagle) socket option
- `autoPingInterval`: if set, seconds between auto-pings
- `autoPingTimeout`: if set, seconds until a ping is considered timed-out
- `autoPingSize`: bytes of random data to send in ping messages (between 4 [default] and 125)

4.4.2 Server-Only Options

- `versions`: what versions to claim support for (default 8, 13)
- `webStatus`: if True (default), show a web page if visiting this endpoint without an Upgrade header

- `requireMaskedClientFrames`: if True (default), client-to-server frames must be masked
- `maskServerFrames`: if True, server-to-client frames must be masked
- `perMessageCompressionAccept`: if provided, a single-argument callable
- `serveFlashSocketPolicy`: if True, server a flash policy file (default: False)
- `flashSocketPolicy`: the actual flash policy to serve (default one allows everything)
- `allowedOrigins`: a list of origins to allow, with embedded *'s for wildcards; these are turned into regular expressions (e.g. `https://*.example.com:443` becomes `^https://.*.example.com:443$`). When doing the matching, the origin is **always** of the form `scheme://host:port` with an explicit port. By default, we match with * (that is, anything). To match all subdomains of `example.com` on any scheme and port, you'd need `*://*.example.com:*`
- `maxConnections`: total concurrent connections allowed (default 0, unlimited)
- `trustXForwardedFor`: number of trusted web servers (reverse proxies) in front of this server which set the X-Forwarded-For header

4.4.3 Client-Only Options

- `version`: which version we are (default: 18)
- `acceptMaskedServerFrames`: if True, accept masked server-to-client frames (default False)
- `maskClientFrames`: if True (default), mask client-to-server frames
- `serverConnectionDropTimeout`: how long (in seconds) to wait for server to drop the connection when closing (default 1)
- `perMessageCompressionOffers`:
- `perMessageCompressionAccept`:

4.5 Upgrading

4.5.1 From < 0.7.0

Starting with release 0.7.0, **Autobahn** now supports both Twisted and asyncio as the underlying network library. This required renaming some modules.

Hence, code for Autobahn < **0.7.0**

```
from autobahn.websocket import WebSocketServerProtocol
```

should be modified for Autobahn >= **0.7.0** for (using Twisted)

```
from autobahn.twisted.websocket import WebSocketServerProtocol
```

or (using asyncio)

```
from autobahn.asyncio.websocket import WebSocketServerProtocol
```

Two more small changes:

1. The method `WebSocketProtocol.sendMessage` had parameter `binary` renamed to `isBinary` (for consistency with `onMessage`)

-
2. The `ConnectionRequest` object no longer provides `peerstr`, but only `peer`, and the latter is a plain, descriptive string (this was needed since we now support both Twisted and asyncio, and also non-TCP transports)

WAMP Programming

This guide gives an introduction to programming with [WAMP](#) in Python using [Autobahn](#). (Go straight to [WAMP Examples](#))

WAMP provides two communication patterns for application components to talk to each other

- *Remote Procedure Calls*
- *Publish & Subscribe*

and we will cover all four interactions involved in above patterns

1. *Registering Procedures* for remote calling
2. *Calling Procedures* remotely
3. *Subscribing to Topics* for receiving events
4. *Publishing Events* to topics

Note that WAMP is a “routed” protocol, and defines a Dealer and Broker role. Practically speaking, this means that any WAMP client needs a WAMP Router to talk to. We provide an open-source one called [Crossbar](#) (there are other routers available). See also [the WAMP specification](#) for more details

Tip: If you are new to WAMP or want to learn more about the design principles behind WAMP, we have a longer text [here](#).

5.1 Application Components

WAMP is all about creating systems from loosely coupled *application components*. These application components are where your application-specific code runs.

A WAMP-based system consists of potentially many application components, which all connect to a WAMP router. The router is *generic*, which means, it does *not* run any application code, but only provides routing of events and calls.

These components use either Remote Procedure Calls (RPC) or Publish/Subscribe (PubSub) to communicate. Each component can do any mix of: register, call, subscribe or publish.

For RPC, an application component registers a callable method at a URI (“endpoint”), and other components call it via that endpoint.

In the Publish/Subscribe model, interested components subscribe to an event URI and when a publish to that URI happens, the event payload is routed to all subscribers:

Hence, to create a WAMP application, you:

1. write application components
2. connect the components to a router

Note that each component can do any mix of registering, calling, subscribing and publishing – it is entirely up to you to logically group functionality as suits your problem space.

5.1.1 Creating Components

There are two ways to create components using Autobahn. One is based on deriving from a particular class and overriding methods and the other is based on functions and decorators. The latter is the recommended approach (but note that many examples and existing code use the subclassing approach). Both are fine and end up calling the same code under the hood.

For both approaches you get to decide if you prefer to use **Twisted** or **asyncio** and express this through `import`. This is `autobahn.twisted.*` versus `autobahn.asyncio.*`

When using **Twisted** you import from `autobahn.twisted.component`:

```
from autobahn.twisted.component import Component

comp = Component(...)

@comp.on_join
def joined(session, details):
    print("session ready")
```

whereas when you are using **asyncio**:

```
from autobahn.asyncio.component import Component

comp = Component(...)

@comp.on_join
def joined(session, details):
    print("session ready")
```

As can be seen, the only difference between Twisted and asyncio is the import (line 1). The rest of the code is identical. For Twisted, you can use `@inlineCallbacks` or return `Deferred` from methods decorated with `on_join`; in Python 3 (with asyncio or Twisted) you would use coroutines (`async def`).

There are four “life cycle” events that Autobahn will trigger on your components: `connect`, `join`, `leave`, and `disconnect`. These all have corresponding decorators (or you can use code like `comp.on('join', the_callback)` if you prefer). We go over these events later.

5.1.2 Running Components

To actually make use of an application components, the component needs to connect to a WAMP router. **Autobahn** includes a `run()` function that does the heavy lifting for you.

```

from autobahn.twisted.component import Component
from autobahn.twisted.component import run

comp = Component(
    transports=u"ws://localhost:8080/ws",
    realm=u"realm1",
)

@comp.on_join
def joined(session, details):
    print("session ready")

if __name__ == "__main__":
    run([comp])

```

and with **asyncio**:

```

from autobahn.asyncio.component import Component
from autobahn.asyncio.component import run

comp = Component(
    transports=u"ws://localhost:8080/ws",
    realm=u"realm1",
)

@comp.on_join
async def joined(session, details):
    print("session ready")

if __name__ == "__main__":
    run([comp])

```

As can be seen, the only difference between Twisted and asyncio is the import (line 1 and 2). The rest of the code is identical.

The configuration of the component is specified when you construct it; the above is the bare minimum – you can specify many transports (which will be tried and re-tried in order) as well as authentication options, the realm to join, re-connection parameters, etcetera. See *Component Configuration Options* for details. A single Python program can run many different `Component` instances at once and you can interconnect these as you see fit – so a single program can have multiple WAMP connections (e.g. to different Realms or different WAMP routers) at once.

Tip: A *Realm* is a routing namespace and an administrative domain for WAMP. For example, a single WAMP router can manage multiple *Realms*, and those realms are completely separate: an event published to topic T on a Realm R1 is NOT received by a subscribe to T on Realm R2.

5.1.3 Running Subclass-Style Components

You can use the same “component” APIs to run a component based on subclassing *ApplicationSession*. In older code it’s common to see `autobahn.twisted.wamp.ApplicationRunner` or `autobahn.asyncio.wamp.ApplicationRunner`. This runner lacks many of the options of the `autobahn.twisted.component`.

`run()` or `autobahn.asyncio.component.run()` functions, so although it can still be useful you likely want to upgrade to `run()`.

All you need to do is set the `session_factory` of a `autobahn.twisted.component.Component` instance to your `autobahn.twisted.wamp.ApplicationSession` subclass (or pass it as a kwarg when creating the Component)

```
comp = Component(
    session_factory=MyApplicationSession,
)
```

5.1.4 Patterns for More Complicated Applications

Many of the examples in this documentation use a decorator style with fixed, static WAMP URIs for registrations and subscriptions. If you have a more complex application, you might want to create URIs at run-time or link several Component instances together.

It is important to remember that Component handles re-connection – this implies there are times when your component is **not** connected. The `on_join` handlers are run whenever a fresh WAMP session is started, so this is the appropriate way to hook in “initialization”-style code (`on_leave` is where “un-initialization” code goes). Note that each new WAMP session will use a new instance of `ApplicationSession`.

Here’s a slightly more complex example that is a small Klein Web application that publishes to a WAMP session when a certain URL is requested (note that the Crossbar.io router supports various REST-style integrations already). Using a similar pattern, you could tie together two or more Component instances (even connecting to two or more *different* WAMP routers).

```
from autobahn.twisted.component import Component
from twisted.internet.defer import inlineCallbacks, Deferred
from twisted.internet.endpoints import TCP4ServerEndpoint
from twisted.web.server import Site
from twisted.internet.task import react

# pip install klein
from klein import Klein

class WebApplication(object):
    """
    A simple Web application that publishes an event every time the
    url "/" is visited.
    """
    def __init__(self, app, wamp_comp):
        self._app = app
        self._wamp = wamp_comp
        self._session = None # "None" while we're disconnected from WAMP router

        # associate ourselves with WAMP session lifecycle
        self._wamp.on('join', self._initialize)
        self._wamp.on('leave', self._uninitialize)
        # hook up Klein routes
        self._app.route(u"/", branch=True)(self._render_slash)

    def _initialize(self, session, details):
        print("Connected to WAMP router")
```

(continues on next page)

(continued from previous page)

```

        self._session = session

    def _uninitialize(self, session, reason):
        print(session, reason)
        print("Lost WAMP connection")
        self._session = None

    def _render_slash(self, request):
        if self._session is None:
            request.setResponseCode(500)
            return b"No WAMP session\n"
        self._session.publish(u"com.myapp.request_served")
        return b"Published to 'com.myapp.request_served'\n"

@inlineCallbacks
def main(reactor):
    component = Component(
        transports=u"ws://localhost:8080/ws",
        realm=u"crossbardemo",
    )
    app = Klein()
    webapp = WebApplication(app, component)

    # have our Web site listen on 8090
    site = Site(app.resource())
    server_ep = TCP4ServerEndpoint(reactor, 8090)
    port = yield server_ep.listen(site)
    print("Web application on {}".format(port))

    # we don't *have* to hand over control of the reactor to
    # component.run -- if we don't want to, we call .start()
    # The Deferred it returns fires when the component is "completed"
    # (or errbacks on any problems).
    comp_d = component.start(reactor)

    # When not using run() we also must start logging ourselves.
    import txaio
    txaio.start_logging(level='info')

    # If the Component raises an exception we want to exit. Note that
    # things like failing to connect will be swallowed by the
    # re-connection mechanisms already so won't reach here.

    def _failed(f):
        print("Component failed: {}".format(f))
        done.errback(f)
    comp_d.addErrback(_failed)

    # wait forever (unless the Component raises an error)
    done = Deferred()
    yield done

if __name__ == '__main__':
    react(main)

```

5.1.5 Longer Example

Here is a more-complete example showing some of the options you can pass when setting up a *Component*. This example can be run against the Crossbar.io router configuration that comes with Autobahn – just run *crossbar start in examples/router/* in your clone.

Twisted:

```

from autobahn.twisted.component import Component, run
from autobahn.twisted.util import sleep
from autobahn.wamp.types import RegisterOptions
from twisted.internet.defer import inlineCallbacks, returnValue

# to see how this works on the Crossbar.io side, see the example
# router configuration in:
# https://github.com/crossbario/autobahn-python/blob/master/examples/router/.crossbar/
# ↪ config.json

component = Component(
    # you can configure multiple transports; here we use two different
    # transports which both exist in the demo router
    transports=[
        {
            u"type": u"websocket",
            u"url": u"ws://localhost:8080/auth_ws",
            u"endpoint": {
                u"type": u"tcp",
                u"host": u"localhost",
                u"port": 8080,
            },
            # you can set various websocket options here if you want
            u"options": {
                u"open_handshake_timeout": 100,
            }
        },
    ],
    # authentication can also be configured (this will only work on
    # the demo router on the first transport above)
    authentication={
        u"cryptosign": {
            u'authid': u'alice',
            # this key should be loaded from disk, database etc never burned into_
            ↪code like this...
            u'privkey':
            ↪'6e3a302aa67d55fffc2059efeb5cf679470b37a26ae9ac18693b56ea3d0cd331c',
        }
    },
    # must provide a realm
    realm=u"crossbardemo",
)

@component.on_join
@inlineCallbacks
def join(session, details):
    print("joined {}: {}".format(session, details))
    yield sleep(1)
    print("Calling 'com.example'")

```

(continues on next page)

(continued from previous page)

```

res = yield session.call(u"example.foo", 42, something="nothing")
print("Result: {}".format(res))
yield session.leave()

@Component.register(
    u"example.foo",
    options=RegisterOptions(details_arg='details'),
)
@inlineCallbacks
def foo(*args, **kw):
    print("foo called: {}, {}".format(args, kw))
    for x in range(5, 0, -1):
        print("  returning in {}".format(x))
        yield sleep(1)
    print("returning '42'")
    returnValue(42)

if __name__ == "__main__":
    run([component])

```

The Python3 / asyncio version of the same example is nearly identical except for some imports (and the use of *async def* instead of Twisted's decorators):

asyncio:

```

from autobahn.asyncio.component import Component, run
from asyncio import sleep
from autobahn.wamp.types import RegisterOptions

# to see how this works on the Crossbar.io side, see the example
# router configuration in:
# https://github.com/crossbario/autobahn-python/blob/master/examples/router/.crossbar/
# ↪ config.json

component = Component(
    # you can configure multiple transports; here we use two different
    # transports which both exist in the demo router
    transports=[
        {
            u"type": u"websocket",
            u"url": u"ws://localhost:8080/auth_ws",
            u"endpoint": {
                u"type": u"tcp",
                u"host": u"localhost",
                u"port": 8080,
            },
            # you can set various websocket options here if you want
            u"options": {
                u"open_handshake_timeout": 100,
            }
        },
    ],
    # authentication can also be configured (this will only work on
    # the demo router on the first transport above)
    authentication={

```

(continues on next page)

```

        u"cryptosign": {
            u'authid': u'alice',
            # this key should be loaded from disk, database etc never burned into
↪code like this...
            u'privkey':
↪'6e3a302aa67d55ffc2059efeb5cf679470b37a26ae9ac18693b56ea3d0cd331c',
        }
    },
    # must provide a realm
    realm=u"crossbardemo",
)

@component.on_join
async def join(session, details):
    print("joined {}: {}".format(session, details))
    await sleep(1)
    print("Calling 'com.example'")
    res = await session.call(u"example.foo", 42, something="nothing")
    print("Result: {}".format(res))
    await session.leave()

@component.register(
    u"example.foo",
    options=RegisterOptions(details_arg='details'),
)
async def foo(*args, **kw):
    print("foo called: {}, {}".format(args, kw))
    for x in range(5, 0, -1):
        print("  returning in {}".format(x))
        await sleep(1)
    print("returning '42'")
    return 42

if __name__ == "__main__":
    run([component])

```

5.2 Component Configuration Options

Most of the arguments given when creating a new Component are a series of dict instances containing “configuration”-style information. These are documented in `autobahn.wamp.component.Component` so we go through the most important ones here:

5.2.1 transports=

You may define any number of transports; these are tried in round-robin order when doing connections (and subsequent re-connections). If the `is_fatal=` predicate is used and returns True for any errors, that transport won’t be used any more (and when no transports remain, the Component has “failed”).

Each transport is defined similarly to “connecting transports” in Crossbar.io but as a simplification a plain unicode URI may be used, for example `transports=u"ws://example.com/ws"` or `transports=[u"ws://`

`/example.com/ws"]`. If using a dict instead of a string you can specify the following keys:

- `type`: "websocket" (default) or "rawsocket"
- `url`: the URL of the router to connect to (very often, this will be the same as the “endpoint” host but not always)
- `endpoint`: (optional; can be inferred from above) - `type`: "tcp" or "unix" - `host`, `port`: only for `type="tcp"` - `path`: only for `type="unix"` - `tls`: bool (advanced Twisted users can pass `CertificateOptions`); this is also inferred from a `wss`: scheme.

In addition, each transport may have some options related to re-connections:

- `max_retries`: (default -1, “try forever”) or a hard limit.
- `max_retry_delay`: (default 300)
- `initial_retry_delay`: (default 1.5) how long we wait to re-connect the first time
- `retry_delay_growth`: (default 1.5) a multiplier expanding our delay each try (so the second re-connect we wait `retry_delay_growth * initial_retry_delay` seconds).
- `retry_delay_jitter`: (default 0.1) percent of total retry delay to add/subtract as jitter

After a successful connection, all re-connection values are set back to their original values.

5.2.2 realm=

Each WAMP Session is associated with precisely one realm, and so is each *Component*. A “realm” is a logically separated WAMP URI space (and is isolated from all other realms that may exist on a WAMP router). You must pass a unicode string here.

5.2.3 session_factory=

Leaving this as `None` should be fine for most users. You may pass an `ApplicationSession` subclass here (or even a callable that takes a single `config` argument and returns an instance implementing `IApplicationSession`) to create new session objects. This can be used by users of the “subclass”-style API who still want to take advantage of the configuration of `Component` and `run()`. The `session` argument passed in many of the callbacks will be an instance of this (see also *Session Lifecycle*).

5.2.4 authentication=

This contains a dict mapping an authenticator name to its configuration. You do not have to have any authentication information, in which case `anonymous` will be used. Currently valid authenticators are: `anonymous`, `ticket`, `wampcra`, `cryptosign` (experimental) and `scram` (experimental).

Typically the administrator of your WAMP router will decide which authentication methods are allowed. See for example [Crossbar.io’s authentication documentation](#) for some discussion of the various methods.

`anonymous` accepts no options. Most methods accept options for:

- `authextra`: application-specific information
- `authid`: unicode username
- `authrole`: the desired role inside the realm

The other authentication methods take additional options as indicated below:

- `wampcra`: also accepts `secret` (the password)

- **cryptosign** (experimental): also accepts `privkey`, the hex-encoded ed25519 private key
- **scram** (experimental): also requires `nonce` (hex-encoded), `kdf` ("argon2id-13" or "pbkdf2"), `salt` (hex-encoded), `iterations` (integer) and optionally `memory` (integer) and `channel_binding` (currently ignored).
- **ticket**: accepts only the `ticket` option

5.3 Running a WAMP Router

The component we've created attempts to connect to a **WAMP router** running locally which accepts connections on port 8080, and for a realm `crossbardemo`.

Our suggested way is to use [Crossbar.io](#) as your WAMP router. There are other [WAMP routers](#) besides Crossbar.io as well.

Once you've installed [Crossbar.io](#), run the example configuration from `examples/router` in your Autobahn clone. If you want to start fresh, you can instead do this:

```
crossbar init
```

This will create the default Crossbar.io node configuration `./crossbar/config.json`. You can then start Crossbar.io by doing:

```
crossbar start
```

Note: The defaults in the above will not work with the examples in the repository nor this documentation; please use the example router configuration that ships with Autobahn (in `examples/router/crossbar/`).

5.4 Remote Procedure Calls

Remote Procedure Call (RPC) is a messaging pattern involving peers of three roles:

- *Caller*
- *Callee*
- *Dealer*

A *Caller* issues calls to remote procedures by providing the procedure URI and any arguments for the call. The *Callee* will execute the procedure using the supplied arguments to the call and return the result of the call to the *Caller*.

Callees register procedures they provide with *Dealers*. *Callers* initiate procedure calls first to *Dealers*. *Dealers* route calls incoming from *Callers* to *Callees* implementing the procedure called, and route call results back from *Callees* to *Callers*.

The *Caller* and *Callee* will usually run application code, while the *Dealer* works as a generic router for remote procedure calls decoupling *Callers* and *Callees*. Thus, the *Caller* can be in a separate process (even a separate implementation language) from the *Callee*.

5.4.1 Registering Procedures

To make a procedure available for remote calling, the procedure needs to be *registered*. Registering a procedure is done by calling `ICallee.register` from a session.

Here is an example using **Twisted**; note that we've eliminated the configuration of the `Component` for clarity; see above for full example.

```

1 from autobahn.twisted.component import Component, run
2
3 component = Component(...)
4
5 @component.on_join
6 @inlineCallbacks
7 def joined(session, details):
8     print("session ready")
9
10     def add2(x, y):
11         return x + y
12
13     try:
14         yield session.register(add2, u'com.myapp.add2')
15         print("procedure registered")
16     except Exception as e:
17         print("could not register procedure: {}".format(e))

```

The procedure `add2` is registered (line 14) under the URI `u"com.myapp.add2"` immediately in the `on_join` callback which fires when the session has connected to a *Router* and joined a *Realm*. Another way to arrange for procedures to be registered is with the `@register` decorator:

```

1 from autobahn.twisted.component import Component, run
2
3 component = Component(...)
4
5 @component.register
6 def add2(x, y):
7     return x + y

```

Tip: You can register *local* functions like in above example, *global* functions as well as *methods* on class instances. Further, procedures can also be automatically registered using *decorators*.

When the registration succeeds, authorized callers will immediately be able to call the procedure (see *Calling Procedures*) using the URI under which it was registered (`u"com.myapp.add2"`).

A registration may also fail, e.g. when a procedure is already registered under the given URI or when the session is not authorized to register procedures.

Using **asyncio**, the example looks identical except for the imports (note that `add` could be `async def` here if it needed to do other work).

```

1 from autobahn.asyncio.component import Component, run
2
3 component = Component(...)
4
5 @component.register
6 def add2(x, y):
7     return x + y

```

The differences compared with the Twisted variant are:

- the import of `ApplicationSession`
- the use of `async` keyword to declare co-routines

- the use of `await` instead of `yield`

5.4.2 Calling Procedures

Calling a procedure (that has been previously registered) is done using `autobahn.wamp.interfaces.ICaller.call()`.

Here is how you would call the procedure `add2` that we registered in *Registering Procedures* under URI `com.myapp.add2` in **Twisted**

```

1 from autobahn.twisted.component import Component, run
2 from twisted.internet.defer import inlineCallbacks
3
4
5 component = Component(...)
6
7 @component.on_join
8 @inlineCallbacks
9 def joined(session, details):
10     print("session ready")
11     try:
12         res = yield session.call(u'com.myapp.add2', 2, 3)
13         print("call result: {}".format(res))
14     except Exception as e:
15         print("call error: {}".format(e))

```

And here is the same done on **asyncio**

```

1 from autobahn.asyncio.component import Component, run
2
3
4 component = Component(...)
5
6 @component.on_join
7 async def joined(session, details):
8     print("session ready")
9     try:
10         res = await session.call(u'com.myapp.add2', 2, 3)
11         print("call result: {}".format(res))
12     except Exception as e:
13         print("call error: {}".format(e))

```

5.5 Publish & Subscribe

Publish & Subscribe (PubSub) is a messaging pattern involving peers of three roles:

- *Publisher*
- *Subscriber*
- *Broker*

A *Publisher* publishes events to topics by providing the topic URI and any payload for the event. Subscribers of the topic will receive the event together with the event payload.

Subscribers subscribe to topics they are interested in with *Brokers*. *Publishers* initiate publication first at a *Broker*. *Brokers* route events incoming from *Publishers* to *Subscribers* that are subscribed to respective topics.

The *Publisher* and *Subscriber* will usually run application code, while the *Broker* works as a generic router for events thus decoupling *Publishers* from *Subscribers*. That is, there can be many *Subscribers* written in different languages on different machines which can all receive a single event published by an independent *Publisher*.

5.5.1 Subscribing to Topics

To receive events published to a topic, a session needs to first subscribe to the topic. Subscribing to a topic is done by calling `autobahn.wamp.interfaces.ISubscriber.subscribe()`.

Here is a **Twisted** example:

```

1 from autobahn.twisted.component import Component
2 from twisted.internet.defer import inlineCallbacks
3
4
5 component = Component(...)
6
7 @component.on_join
8 @inlineCallbacks
9 def joined(session, details):
10     print("session ready")
11
12     def oncounter(count):
13         print("event received: {}".format(count))
14
15     try:
16         yield session.subscribe(oncounter, u'com.myapp.oncounter')
17         print("subscribed to topic")
18     except Exception as e:
19         print("could not subscribe to topic: {}".format(e))

```

We create an event handler function `oncounter` (you can name that as you like) which will get called whenever an event for the topic is received.

To subscribe (line 15), we provide the event handler function (`oncounter`) and the URI of the topic to which we want to subscribe (`u'com.myapp.oncounter'`).

When the subscription succeeds, we will receive any events published to `u'com.myapp.oncounter'`. Note that we won't receive events published *before* the subscription succeeds.

The corresponding **asyncio** code looks like this

```

1 from autobahn.twisted.component import Component
2
3
4 component = Component(...)
5
6 @component.on_join
7 async def joined(session, details):
8     print("session ready")
9
10     def oncounter(count):
11         print("event received: {}".format(count))
12
13     try:
14         yield session.subscribe(oncounter, u'com.myapp.oncounter')
15         print("subscribed to topic")

```

(continues on next page)

(continued from previous page)

```

16     except Exception as e:
17         print("could not subscribe to topic: {}".format(e))

```

Again, nearly identical to Twisted. Note that when using the Component APIs we can use a shortcut to the above (e.g. perhaps there's nothing else to do in `on_join`). This shortcut works similarly for Twisted, so we only show an `asyncio` example:

```

1  from autobahn.twisted.component import Component
2
3
4  component = Component(...)
5
6  @component.subscribe(u"com.myapp.oncounter")
7  def oncounter(count):
8      print("event received: {}".format(count))

```

5.5.2 Publishing Events

Publishing an event to a topic is done by calling `autobahn.wamp.interfaces.IPublisher.publish()`.

Events can carry arbitrary positional and keyword based payload – as long as the payload is serializable in JSON.

Here is a **Twisted** example that will publish an event to topic `u'com.myapp.oncounter'` with a single (positional) payload being a counter that is incremented for each publish:

```

1  from autobahn.twisted.component import Component
2  from autobahn.twisted.util import sleep
3  from twisted.internet.defer import inlineCallbacks
4
5
6  component = Component(...)
7
8
9  @component.on_join
10 @inlineCallbacks
11 def joined(session, details):
12     print("session ready")
13
14     counter = 0
15     while True:
16         # publish() only returns a Deferred if we asked for an acknowledgement
17         session.publish(u'com.myapp.oncounter', counter)
18         counter += 1
19         yield sleep(1)

```

The corresponding `asyncio` code looks like this

```

1  from autobahn.asyncio.component import Component
2  from asyncio import sleep
3
4
5  component = Component(...)
6
7
8  @component.on_join

```

(continues on next page)

(continued from previous page)

```

9  async def joined(session, details):
10     print("session ready")
11
12     counter = 0
13     while True:
14         # publish() is only async if we asked for an acknowledgement
15         session.publish(u'com.myapp.oncounter', counter)
16         counter += 1
17         await sleep(1)

```

When publishing, you can pass an `options=` kwarg which is an instance of `PublishOptions`. Many of the options require support from the router.

- whitelisting and blacklisting (all the `eligible*` and `exclude*` options) can affect which subscribers receive the publish; see [crossbar documentation](#) for more information;
- `retain=` asks the router to retain the message;
- `acknowledge=` asks the router to notify you it received the publish (note that this does *not* wait for every subscriber to have received the publish) and causes `publish()` to return a Future/Deferred.

Tip: By default, a publisher will not receive an event it publishes even when the publisher is *itself* subscribed to the topic subscribed to. This behavior can be overridden; see `PublishOptions` and `exclude_me=False`.

Tip: By default, publications are *unacknowledged*. This means, a `publish()` may fail *silently* (like when the session is not authorized to publish to the given topic). This behavior can be overridden; see `PublishOptions` and `acknowledge=True`.

5.6 Session Lifecycle

A WAMP application component has this lifecycle:

1. component created
2. transport connected (`ISession.onConnect` called)
3. authentication challenge received (only for authenticated WAMP sessions, `ISession.onChallenge` called)
4. session established (realm joined, `ISession.onJoin` called)
5. session closed (realm left, `ISession.onLeave` called)
6. transport disconnected (`ISession.onDisconnect` called)

In the Component API, there are similar corresponding events. The biggest difference is the lack of “challenge” events (you pass authentication configuration instead) and the addition of a “ready” event. You can subscribe to these events directly using a “listener” style API or via decorators. The events are:

1. “connect”: transport connected
2. “join”: session has successfully joined a realm
3. “ready”: indicates that the realm has been joined **and** all “join” handlers have completed (including async ones)
4. “leave”: session has left a realm

5. “disconnect”: transport has disconnected

You can use the method `autobahn.wamp.component.Component.on()` to subscribe directly to events with a listener-function. For example, `component.on('ready', my_ready_listener)`. Note that on a single `Component` instance these callbacks *can* happen multiple times (e.g. if the component is disconnected and then reconnects, its `connect` message will fire again after the `disconnect`). However, they will always be in order (i.e. you can't join until after a `connect` and `ready` always comes after `join`).

There is also still the older “subclassing” based API, which is still supported and can be used if you prefer. This API involves subclassing `ApplicationSession` and overriding methods corresponding to the events (see `ISession` for more information):

```
class CustomSession(ApplicationSession):
    def __init__(self, config=None):
        ApplicationSession.__init__(self, config)
        print("component created")

    def onConnect(self):
        print("transport connected")
        self.join(self.config.realm)

    def onChallenge(self, challenge):
        print("authentication challenge received")

    def onJoin(self, details):
        print("session joined")

    def onLeave(self, details):
        print("session left")

    def onDisconnect(self):
        print("transport disconnected")
```

5.7 Logging

Internally, **Autobahn** uses `txaio` as an abstraction layer over Twisted and `asyncio` APIs. `txaio` also provides an abstracted logging API, which is what both **Autobahn** and `Crossbar` use.

There is a [txaio Programming Guide](#) which includes information on logging. If you are writing new code, you can choose the `txaio` APIs for maximum compatibility and runtime-efficiency (see below). If you prefer to write idiomatic logging code to “go with” the event-based framework you’ve chosen, that’s possible as well. For `asyncio` this is Python’s built-in `logging` module; for Twisted it is the [post-15.2.0 logging API](#). The logging system in `txaio` is able to interoperate with the legacy Twisted logging API as well.

The `txaio` API encourages a more structured approach while still achieving easily-rendered text logging messages. The basic idiom is to use new-style Python formatting strings and pass any “data” as kwargs. So a typical logging call might look like: `self.log.info("Knob {frob.name} moved {degrees} right.", knob=an_obj, degrees=42)` and if the “info” log level is not enabled, the string won’t be “interpolated” (i.e. `str()` will not be invoked on any of the args, and a new string won’t be produced). On top of that, logging observers may examine the kwargs and do things beyond “normal” logging. This is very much inspired by `twisted.logger`; you can read the [Twisted logging documentation](#) for more insight.

Before any logging happens of course you must activate the logging system. There is a convenience method in `txaio` called `txaio.start_logging`. This will use `twisted.logger.globalLogBeginner` on Twisted or `logging.Logger.addHandler` under `asyncio` and allows you to specify and output stream and/or a log

level. Valid levels are the list of strings in `txaio.interfaces.log_levels`. If you're using the high-level `autobahn.twisted.component.run()` or `autobahn.asyncio.component.run()` APIs, logging will be started for you.

If you have instead got your own log-starting code (e.g. `twistd`) or Twisted/asyncio specific log handlers (`logging.Handler` subclass on asyncio and `ILogObserver` implementer under Twisted) then you will still get **Autobahn** and **Crossbar** messages. Probably the formatting will be slightly different from what `txaio.start_logging` provides. In either case, **do not depend on the formatting** of the messages e.g. by “screen-scraping” the logs.

We very much **recommend using the “`txaio.start_logging()`” method** of activating the logging system, as we've gone to pains to ensure that over-level logs are a “no-op” and incur minimal runtime cost. We achieve this by re-binding all out-of-scope methods on any logger created by `txaio.make_logger()` to a do-nothing function (by saving weak-refs of all the loggers created); at least on **PyPy** this is very well optimized out. This allows us to be generous with `.debug()` or `.trace()` calls without incurring very much overhead. Your Milage May Vary using other methods. If you haven't called `txaio.start_logging()` this optimization is not activated.

5.8 Upgrading

5.8.1 From < 0.8.0

Starting with release 0.8.0, **Autobahn** now supports WAMP v2, and also support both Twisted and asyncio. This required changing module naming for WAMP v1 (which is Twisted only).

Hence, WAMP v1 code for Autobahn < **0.8.0**

```
from autobahn.wamp import WampServerFactory
```

should be modified for Autobahn >= **0.8.0** for (using Twisted)

```
from autobahn.wamp1.protocol import WampServerFactory
```

Warning: WAMP v1 will be deprecated with the 0.9 release of **Autobahn** which is expected in Q4 2014.

5.8.2 From < 0.9.4

Starting with release 0.9.4, all WAMP router code in **Autobahn** has been split out and moved to **Crossbar.io**. Please see the announcement [here](#).

XBR Programming

Autobahn comes with built-in support for XBR. This chapter contains documentation of writing XBR buyers and sellers in Python using Autobahn.

- *On-chain XBR smart contracts*
 - *SimpleBlockchain*
 - *SimpleBlockchain Example*
 - *Using the ABI files*
 - *Data stored on-chain*
- *Off-chain XBR market maker*
 - *SimpleBuyer*
 - *SimpleBuyer Example*
 - *SimpleSeller*
 - *SimpleSeller Example*
 - *KeySeries*
- *Interface Reference*
 - *IMarketMaker*
 - *IProvider*
 - *IConsumer*
 - *ISeller*
 - *IBuyer*

6.1 On-chain XBR smart contracts

The root anchor of the XBR network is a set of smart contracts on the Ethereum blockchain. The contracts are written in Solidity and published as open-source on [GitHub](#).

To talk to the XBR smart contracts on the blockchain, you need two things:

1. the XBR smart contract addresses and
2. the XBR smart contract ABI files (JSON)

Both of which are built into the Autobahn library.

6.1.1 SimpleBlockchain

While you *can* use just the raw addresses and ABI blobs contained in Autobahn, and use whatever way and form to talk directly to the blockchain fully on your own, Autobahn *also* provides a convenient blockchain client with specific functions directly supporting XBR:

6.1.2 SimpleBlockchain Example

Here is a complete example blockchain client:

```
import argparse
from binascii import a2b_hex, b2a_hex
from autobahn import xbr
from twisted.internet.task import react
from twisted.internet.defer import inlineCallbacks

@inlineCallbacks
def main(reactor, gateway, adr):
    sbc = xbr.SimpleBlockchain(gateway)
    yield sbc.start()

    print('status for address 0x{}'.format(b2a_hex(adr).decode()))

    # get ETH and XBR account balances for address
    balances = yield sbc.get_balances(adr)
    print('balances: {}'.format(balances))

    # get XBR network membership status for address
    member_status = yield sbc.get_member_status(adr)
    print('member status: {}'.format(member_status))

if __name__ == '__main__':
    parser = argparse.ArgumentParser()

    parser.add_argument('--gateway',
                        dest='gateway',
                        type=str,
                        default=None,
                        help='Ethereum HTTP gateway URL or None for auto-select.')

    parser.add_argument('--adr',
```

(continues on next page)

(continued from previous page)

```

        dest='adr',
        type=str,
        default=None,
        help='Ethereum address to lookup.')

args = parser.parse_args()

react(main, (args.gateway, a2b_hex(args.adr[2:],)))

```

Here is example output of above program with two different addresses, only one being a member, and with different balances of ETH and XBR.

```

connected to network 5777 at provider "http://localhost:1545"
status for address 0x90f8bf6a479f320ead074411a4b0e7944ea8c9c1:
balances: {'ETH': 9999866871000000000000, 'XBR': 10000000000000000000000000}
member status: None

connected to network 5777 at provider "http://localhost:1545"
status for address 0xffcf8fdee72ac11b5c542428b35eef5769c409f0:
balances: {'ETH': 9999999999999999625429, 'XBR': 0}
member status: {'eula': 'QmU7Gizbre17x6V2VR1Q2GJEjz6m8S1bXmBtVxS2vmvb81', 'profile': ↵
↵None}

```

6.1.3 Using the ABI files

To directly use the embedded ABI files:

```

import json
import pkg_resources
from pprint import pprint

with open(pkg_resources.resource_filename('xbr', 'contracts/XBRToken.json')) as f:
    data = json.loads(f.read())
    abi = data['abi']
    pprint(abi)

```

6.1.4 Data stored on-chain

See the [XBRNetwork](#) contract:

```

// Current XBR Network members ("member directory").
mapping(address => Member) private members;

// Current XBR Domains ("domain directory")
mapping(bytes16 => Domain) private domains;

// Current XBR Nodes ("node directory");
mapping(bytes16 => Node) private nodes;

// Index: node public key => (market ID, node ID)
mapping(bytes32 => bytes16) private nodesByKey;

// Current XBR Markets ("market directory")

```

(continues on next page)

(continued from previous page)

```
mapping(bytes16 => Market) private markets;

/// Index: maker address => market ID
mapping(address => bytes16) private marketsByMaker;
```

6.2 Off-chain XBR market maker

6.2.1 SimpleBuyer

Autobahn includes a “simple buyer” for use in buyer delegate user services which is able to automatically quote and buy data encryption keys via the market maker from sellers in a market.

The simple buyer operates in the background and automatically buys keys on demand, as the user calls “un-wrap(ciphertext)” on received XBR encrypted application payload:

6.2.2 SimpleBuyer Example

Here is a complete example buyer:

```
import binascii
import os

from autobahn.twisted.component import Component, run
from autobahn.xbr import SimpleBuyer
from autobahn.wamp.types import SubscribeOptions

comp = Component(
    transports=os.environ.get('XBR_INSTANCE', 'wss://continental2.crossbario.com/ws'),
    realm=os.environ.get('XBR_REALM', 'realm1'),
    extra={
        'market_maker_adr': os.environ.get('XBR_MARKET_MAKER_ADR',
            '0xff035c911accf7c7154c51cb62460b50f43ea54f'),
        'buyer_privkey': os.environ.get('XBR_BUYER_PRIVKEY',
            '646f1ce2fdad0e6deeb5c7e8e5543bdde65e86029e2fd9fc169899c440a7913'),
    }
)

@comp.on_join
async def joined(session, details):
    print('Buyer session joined', details)

    market_maker_adr = binascii.a2b_hex(session.config.extra['market_maker_adr'][2:])
    print('Using market maker adr:', session.config.extra['market_maker_adr'])

    buyer_privkey = binascii.a2b_hex(session.config.extra['buyer_privkey'])

    buyer = SimpleBuyer(market_maker_adr, buyer_privkey, 100)
    balance = await buyer.start(session, details.authid)
    print("Remaining balance={}".format(balance))

    async def on_event(key_id, enc_ser, ciphertext, details=None):
```

(continues on next page)

(continued from previous page)

```

        payload = await buyer.unwrap(key_id, enc_ser, ciphertext)
        print('Received event {}'.format(details.publication), payload)

    await session.subscribe(on_event, "io.crossbar.example",
        options=SubscribeOptions(details=True))

if __name__ == '__main__':
    run([comp])

```

6.2.3 SimpleSeller

Autobahn includes a “simple seller” for use in seller delegate user services which is able to automatically offer and sell data encryption keys via the market maker to buyers in a market:

6.2.4 SimpleSeller Example

Here is a complete example seller:

```

import binascii
import os
from time import sleep
from uuid import UUID

from autobahn.twisted.component import Component, run
from autobahn.twisted.util import sleep
from autobahn.wamp.types import PublishOptions
from autobahn.xbr import SimpleSeller

comp = Component(
    transports=os.environ.get('XBR_INSTANCE', 'wss://continental2.crossbario.com/ws'),
    realm=os.environ.get('XBR_REALM', 'realm1'),
    extra={
        'market_maker_adr': os.environ.get('XBR_MARKET_MAKER_ADR',
            '0xff035c911accf7c7154c51cb62460b50f43ea54f'),
        'seller_privkey': os.environ.get('XBR_SELLER_PRIVKEY',
            '646f1ce2fdad0e6deeb5c7e8e5543bdde65e86029e2fd9fc169899c440a7913'),
    }
)

running = False

@comp.on_join
async def joined(session, details):
    print('Seller session joined', details)
    global running
    running = True

    market_maker_adr = binascii.a2b_hex(session.config.extra['market_maker_adr'][2:])
    print('Using market maker adr:', session.config.extra['market_maker_adr'])

    seller_privkey = binascii.a2b_hex(session.config.extra['seller_privkey'])

```

(continues on next page)

(continued from previous page)

```
api_id = UUID('627f1b5c-58c2-43b1-8422-a34f7d3f5a04').bytes
topic = 'io.crossbar.example'
counter = 1

seller = SimpleSeller(market_maker_adr, seller_privkey)
seller.add(api_id, topic, 35, 10, None)
await seller.start(session)

print('Seller has started')

while running:
    payload = {'data': 'py-seller', 'counter': counter}
    key_id, enc_ser, ciphertext = await seller.wrap(api_id,
                                                    topic,
                                                    payload)
    pub = await session.publish(topic, key_id, enc_ser, ciphertext,
                                options=PublishOptions(acknowledge=True))

    print('Published event {}: {}'.format(pub.id, payload))

    counter += 1
    await sleep(1)

@comp.on_leave
def left(session, details):
    print('Seller session left', details)
    global running
    running = False

if __name__ == '__main__':
    run([comp])
```

6.2.5 KeySeries

Helper class used in SimpleSeller to create an auto-rotating (time-interval based) data encryption key series:

6.3 Interface Reference

6.3.1 IMarketMaker

6.3.2 IProvider

6.3.3 IConsumer

6.3.4 ISeller

6.3.5 IBuyer

7.1 Basic Examples

Note: The examples here demonstrate WebSocket programming with Autobahn and are available in Twisted and asyncio-based variants respectively.

7.1.1 Echo

Twisted / asyncio

A simple WebSocket echo server and client.

7.1.2 Slow Square

Twisted / asyncio

This example shows a WebSocket server that will receive a JSON encode float over WebSocket, slowly compute the square, and send back the result. The example is intended to demonstrate how to use co-routines inside WebSocket handlers.

7.1.3 Testee

Twisted / asyncio

The example implements a *testee* for testing against Autobahn/Testsuite.

7.2 Additional Examples

Note: The examples here demonstrate various further features and aspects of WebSocket programming with Autobahn. However, these examples are **currently only available for Twisted**.

7.2.1 Secure WebSocket

Twisted

How to run WebSocket over TLS (“wss”).

7.2.2 WebSocket and Twisted Web

Twisted

How to run WebSocket under Twisted Web. This is a very powerful feature, as it allows you to create a complete HTTP(S) resource hierarchy with different services like static file serving, REST and WebSocket combined under one server.

7.2.3 Twisted Web, WebSocket and WSGI

Twisted

This example shows how to run Flask (or any other WSGI compliant Web thing) under Twisted Web and combine that with WebSocket.

7.2.4 Secure WebSocket and Twisted Web

Twisted

A variant of the previous example that runs a HTTPS server with secure WebSocket on a subpath.

7.2.5 WebSocket Ping-Pong

Twisted

The example demonstrates how to trigger and process WebSocket pings and pongs.

7.2.6 More

- [WebSocket Authentication with Mozilla Persona](#)
- [Broadcasting over WebSocket](#)
- [WebSocket Compression](#)
- [WebSocket over Twisted Endpoints](#)
- [Using HTTP Headers with WebSocket](#)
- [WebSocket on Multicore](#)

- WebSocket as a Twisted Service
- WebSocket Echo Variants
- WebSocket Fallbacks
- Using multiple WebSocket Protocols
- Streaming WebSocket
- Wrapping Twisted Protocol/Factories over WebSocket
- Using wxPython with Autobahn

NOTE that for all examples you will **need to run a router**. We develop [Crossbar.io](#) and there are [other routers](#) available as well. We include a working [Crossbar.io](#) configuration in the [examples/router/](#) subdirectory as well as [instructions on how to run it](#).

8.1 Overview of Examples

The examples are organized between [asyncio](#) and [Twisted](#) at the top-level, with similarly-named examples demonstrating the same functionality with the respective framework.

Each example typically includes four things:

- `frontend.py`: the Caller or Subscriber, in Python
- `backend.py`: the Callee or Publisher, in Python
- `frontend.js`: JavaScript version of the frontend
- `backend.js`: JavaScript version of the backend
- `*.html`: boilerplate so a browser can run the JavaScript

So for each example, you start *one* backend and *one* frontend component (your choice). You can usually start multiple frontend components with no problem, but will get errors if you start two backends trying to register at the same procedure URI (for example).

Still, you are encouraged to try playing with mixing and matching the frontend and backend components, starting multiple front-ends, etc. to explore Crossbar and Autobahn's behavior. Often the different examples use similar URIs for procedures and published events, so you can even try mixing between the examples.

The provided [Crossbar.io](#) configuration will run a Web server that you can visit at `http://localhost:8080` and includes links to the frontend/backend HTML for the javascript versions. Usually these just use `console.log()` so you'll have to open up the JavaScript console in your browser to see it working.

8.2 Automatically Run All Examples

There is a script (`./examples/run-all-examples.py`) which runs all the WAMP examples for 5 seconds each, [this asciicast](#) shows you how (see comments for how to run it yourself):

8.3 Publish & Subscribe (PubSub)

- Basic Twisted - `asyncio` - Demonstrates basic publish and subscribe.
- Complex Twisted - `asyncio` - Demonstrates publish and subscribe with complex events.
- Options Twisted - `asyncio` - Using options with PubSub.
- Unsubscribe Twisted - `asyncio` - Cancel a subscription to a topic.

8.4 Remote Procedure Calls (RPC)

- Time Service Twisted - `asyncio` - A trivial time service - demonstrates basic remote procedure feature.
- Slow Square Twisted - `asyncio` - Demonstrates procedures which return promises and return asynchronously.
- Arguments Twisted - `asyncio` - Demonstrates all variants of call arguments.
- Complex Result Twisted - `asyncio` - Demonstrates complex call results (call results with more than one positional or keyword results).
- Errors Twisted - `asyncio` - Demonstrates error raising and catching over remote procedures.
- Progressive Results Twisted - `asyncio` - Demonstrates calling remote procedures that produce progressive results.
- Options Twisted - `asyncio` - Using options with RPC.

8.5 I'm Confused, Just Tell Me What To Run

If all that is too many options to consider, you want to do this:

1. Open 3 terminals
2. In terminal 1, `setup` and `run` a local Crossbar in the root of your Autobahn checkout.
3. In terminals 2 and 3, go to the root of your Autobahn checkout and activate the virtualenv from step 2 (`source venv-autobahn/bin/activate`)
4. In terminal 2 run `python ./examples/twisted/wamp/rpc/arguments/backend.py`
5. In terminal 3 run `python ./examples/twisted/wamp/rpc/arguments/frontend.py`

The above procedure is gone over in [this asciicast](#):

The following is a API reference of **Autobahn** generated from Python source code and docstrings.

Warning: This is a *complete* reference of the *public* API of **Autobahn**. User code and applications should only rely on the public API, since internal APIs can (and will) change without any guarantees. Anything *not* listed here is considered a private API.

9.1 Module `autobahn.util`

`autobahn.util.public` (*obj*)

The public user API of Autobahn is marked using this decorator. Everything that is not decorated `@public` is library internal, can change at any time and should not be used in user program code.

`autobahn.util.encode_truncate` (*text*, *limit*, *encoding='utf8'*, *return_encoded=True*)

Given a string, return a truncated version of the string such that the UTF8 encoding of the string is smaller than the given limit.

This function correctly truncates even in the presence of Unicode code points that encode to multi-byte encodings which must not be truncated in the middle.

Parameters

- **text** (*str*) – The (Unicode) string to truncate.
- **limit** (*int*) – The number of bytes to limit the UTF8 encoding to.
- **encoding** (*str*) – Truncate the string in this encoding (default is `utf-8`).
- **return_encoded** (*bool*) – If `True`, return the string encoded into bytes according to the specified encoding, else return the string as a string.

Returns The truncated string.

Return type `str` or `bytes`

`autobahn.util.xor(d1, d2)`

XOR two binary strings of arbitrary (equal) length.

Parameters

- **d1** (*binary*) – The first binary string.
- **d2** (*binary*) – The second binary string.

Returns XOR of the binary strings (`XOR(d1, d2)`)

Return type `bytes`

`autobahn.util.utcnow()`

Get current time in UTC as ISO 8601 string.

Returns Current time as string in ISO 8601 format.

Return type `str`

`autobahn.util.utcstr(ts=None)`

Format UTC timestamp in ISO 8601 format.

Note: to parse an ISO 8601 formatted string, use the **iso8601** module instead (e.g. `iso8601.parse_date("2014-05-23T13:03:44.123Z")`).

Parameters **ts** (instance of `datetime.datetime` or `None`) – The timestamp to format.

Returns Timestamp formatted in ISO 8601 format.

Return type `str`

`autobahn.util.id()`

Generate a new random integer ID from range **[0, 2**53]**.

The generated ID is based on a pseudo-random number generator (Mersenne Twister, which has a period of 2**19937-1). It is NOT cryptographically strong, and hence NOT suitable to generate e.g. secret keys or access tokens.

The upper bound **2**53** is chosen since it is the maximum integer that can be represented as a IEEE double such that all smaller integers are representable as well.

Hence, IDs can be safely used with languages that use IEEE double as their main (or only) number type (JavaScript, Lua, etc).

Returns A random integer ID.

Return type `int`

`autobahn.util.rid()`

Generate a new random integer ID from range **[0, 2**53]**.

The generated ID is uniformly distributed over the whole range, doesn't have a period (no pseudo-random generator is used) and cryptographically strong.

The upper bound **2**53** is chosen since it is the maximum integer that can be represented as a IEEE double such that all smaller integers are representable as well.

Hence, IDs can be safely used with languages that use IEEE double as their main (or only) number type (JavaScript, Lua, etc).

Returns A random integer ID.

Return type `int`

`autobahn.util.newid (length=16)`

Generate a new random string ID.

The generated ID is uniformly distributed and cryptographically strong. It is hence usable for things like secret keys and access tokens.

Parameters `length` (*int*) – The length (in chars) of the ID to generate.

Returns A random string ID.

Return type `str`

`autobahn.util.rtime ()`

Precise, fast wallclock time.

Returns The current wallclock in seconds. Returned values are only guaranteed to be meaningful relative to each other.

Return type `float`

class `autobahn.util.Stopwatch (start=True)`

Stopwatch based on walltime.

This can be used to do code timing and uses the most precise walltime measurement available on the platform. This is a very light-weight object, so create/dispose is very cheap.

Parameters `start` (*bool*) – If `True`, immediately start the stopwatch.

elapsed ()

Return total time elapsed in seconds during which the stopwatch was running.

Returns The elapsed time in seconds.

Return type `float`

pause ()

Pauses the stopwatch and returns total time elapsed in seconds during which the stopwatch was running.

Returns The elapsed time in seconds.

Return type `float`

resume ()

Resumes a paused stopwatch and returns total elapsed time in seconds during which the stopwatch was running.

Returns The elapsed time in seconds.

Return type `float`

stop ()

Stops the stopwatch and returns total time elapsed in seconds during which the stopwatch was (previously) running.

Returns The elapsed time in seconds.

Return type `float`

class `autobahn.util.Tracker (tracker, tracked)`

A key-based statistics tracker.

absolute (key)

Return the UTC wall-clock time at which a tracked event occurred.

Parameters `key` (*str*) – The key

Returns Timezone-naive datetime.

Return type instance of `datetime.datetime`

diff (*start_key*, *end_key*, *formatted=True*)

Get elapsed difference between two previously tracked keys.

Parameters

- **start_key** (*str*) – First key for interval (older timestamp).
- **end_key** (*str*) – Second key for interval (younger timestamp).
- **formatted** (*bool*) – If `True`, format computed time period and return string.

Returns Computed time period in seconds (or formatted string).

Return type `float` or `str`

track (*key*)

Track elapsed for key.

Parameters **key** (*str*) – Key under which to track the timing.

class `autobahn.util.EqualityMixin`

Mixing to add equality comparison operators to a class.

Two objects are identical under this mixin, if and only if:

1. both object have the same class
2. all non-private object attributes are equal

class `autobahn.util.ObservableMixin`

Internal utility for enabling event-listeners on particular objects

fire (*event*, **args*, ***kwargs*)

Fire a particular event.

Parameters **event** – the event to fire. All other args and kwargs are passed on to the handler(s) for the event.

Returns a `Deferred/Future` gathering all async results from all handlers and/or parent handlers.

off (*event=None*, *handler=None*)

Stop listening for a single event, or all events.

Parameters

- **event** – if `None`, remove all listeners. Otherwise, remove listeners for the single named event.
- **handler** – if `None`, remove all handlers for the named event; otherwise remove just the given handler.

on (*event*, *handler*)

Add a handler for an event.

Parameters

- **event** – the name of the event
- **handler** – a callable that's invoked when `.fire()` is called for this event. Arguments will be whatever are given to `.fire()`

set_valid_events (*valid_events=None*)

Parameters **valid_events** – if non-`None`, `.on()` or `.fire()` with an event not listed in `valid_events` raises an exception.

class autobahn.util.IdGenerator

ID generator for WAMP request IDs.

WAMP request IDs are sequential per WAMP session, starting at 1 and wrapping around at 2^{53} (both value are inclusive [1, 2^{53}]).

The upper bound 2^{53} is chosen since it is the maximum integer that can be represented as a IEEE double such that all smaller integers are representable as well.

Hence, IDs can be safely used with languages that use IEEE double as their main (or only) number type (JavaScript, Lua, etc).

See <https://github.com/wamp-proto/wamp-proto/blob/master/spec/basic.md#ids>

next ()

Returns next ID.

Returns The next ID.

Return type int

autobahn.util.generate_token(char_groups, chars_per_group, chars=None, sep=None, lower_case=False)

Generate cryptographically strong tokens, which are strings like *M6X5-YO5W-T5IK*. These can be used e.g. for used-only-once activation tokens or the like.

The returned token has an entropy of $\text{math.log}(\text{len}(\text{chars}), 2) * \text{chars_per_group} * \text{char_groups}$ bits.

With the default charset and 4 characters per group, generate_token() produces strings with the following entropy:

character groups	entropy (at least)	recommended use
2	38 bits	
3	57 bits	one-time activation or pairing code
4	76 bits	secure user password
5	95 bits	
6	114 bits	globally unique serial / product code
7	133 bits	

Here are some examples:

- token(3): 9QXT-UXJW-7R4H
- token(4): LPNN-JMET-KWEP-YK45
- token(6): NXW9-74LU-6NUH-VLPV-X6AG-QUE3

Parameters

- **char_groups** (int) – Number of character groups (or characters if chars_per_group == 1).
- **chars_per_group** (int) – Number of characters per character group (or 1 to return a token with no grouping).
- **chars** (str or None) – Characters to choose from. Default is 27 character subset of the ISO basic Latin alphabet (see: DEFAULT_TOKEN_CHARS).
- **sep** (str) – When separating groups in the token, the separator string.
- **lower_case** (bool) – If True, generate token in lower-case.

Returns The generated token.

Return type `str`

`autobahn.util.generate_activation_code()`

Generate a one-time activation code or token of the form `u'W97F-96MJ-YGJL'`. The generated value is cryptographically strong and has (at least) 57 bits of entropy.

Returns The generated activation code.

Return type `str`

`autobahn.util.generate_serial_number()`

Generate a globally unique serial / product code of the form `u'YRAC-EL4X-FQQE-AW4T-WNUV-VN6T'`. The generated value is cryptographically strong and has (at least) 114 bits of entropy.

Returns The generated serial number / product code.

Return type `str`

`autobahn.util.generate_user_password()`

Generate a secure, random user password of the form `u'kgojzi61dn5dtb6d'`. The generated value is cryptographically strong and has (at least) 76 bits of entropy.

Returns The generated password.

Return type `str`

9.2 Module `autobahn.websocket`

9.2.1 WebSocket Interfaces

class `autobahn.websocket.interfaces.IWebSocketChannel`

A WebSocket channel is a bidirectional, full-duplex, ordered, reliable message channel over a WebSocket connection as specified in RFC6455.

This interface defines a message-based API to WebSocket plus auxiliary hooks and methods.

onClose (*wasClean*, *code*, *reason*)

Callback fired when the WebSocket connection has been closed (WebSocket closing handshake has been finished or the connection was closed uncleanly).

Parameters

- **wasClean** (*bool*) – True iff the WebSocket connection was closed cleanly.
- **code** (*int* or *None*) – Close status code as sent by the WebSocket peer.
- **reason** (*str* or *None*) – Close reason as sent by the WebSocket peer.

onConnect (*request_or_response*)

Callback fired during WebSocket opening handshake when a client connects (to a server with request from client) or when server connection established (by a client with response from server). This method may run asynchronous code.

Parameters *request_or_response* (Instance of `autobahn.websocket.types.ConnectionRequest` or `autobahn.websocket.types.ConnectionResponse`.) – Connection request (for servers) or response (for clients).

Returns When this callback is fired on a WebSocket server, you may return either `None` (in which case the connection is accepted with no specific WebSocket subprotocol) or an `str` instance with the name of the WebSocket subprotocol accepted. When the callback is fired on a WebSocket client, this method must return `None`. To deny a connection, raise an `Exception`. You can also return a `Deferred/Future` that resolves/rejects to the above.

onConnecting (*transport_details*)

This method is called when we've connected, but before the handshake is done.

Parameters `transport_details` (`autobahn.websocket.types.TransportDetails`) – information about the transport.

Returns A `autobahn.websocket.types.ConnectingRequest` instance is returned to indicate which options should be used for this connection. If you wish to use the default behavior, `None` may be returned (this is the default).

onMessage (*payload, isBinary*)

Callback fired when a complete WebSocket message was received.

Parameters

- **payload** (*bytes*) – The WebSocket message received.
- **isBinary** (*bool*) – Flag indicating whether payload is binary or UTF-8 encoded text.

onOpen ()

Callback fired when the initial WebSocket opening handshake was completed. You now can send and receive WebSocket messages.

onPing (*payload*)

Callback fired when a WebSocket ping was received. A default implementation responds by sending a WebSocket pong.

Parameters `payload` (*bytes*) – Payload of ping (when there was any). Can be arbitrary, up to 125 octets.

onPong (*payload*)

Callback fired when a WebSocket pong was received. A default implementation does nothing.

Parameters `payload` (*bytes*) – Payload of pong (when there was any). Can be arbitrary, up to 125 octets.

sendClose (*code=None, reason=None*)

Starts a WebSocket closing handshake tearing down the WebSocket connection.

Parameters

- **code** (*int*) – An optional close status code (1000 for normal close or 3000–4999 for application specific close).
- **reason** (*str*) – An optional close reason (a string that when present, a status code MUST also be present).

sendMessage (*payload, isBinary*)

Send a WebSocket message over the connection to the peer.

Parameters

- **payload** (*bytes*) – The WebSocket message to be sent.
- **isBinary** (*bool*) – Flag indicating whether payload is binary or UTF-8 encoded text.

sendPing (*payload=None*)

Send a WebSocket ping to the peer.

A peer is expected to pong back the payload as soon as “practical”. When more than one ping is outstanding at a peer, the peer may elect to respond only to the last ping.

Parameters `payload` (*bytes or None*) – An (optional) arbitrary payload of length less than 126 octets.

sendPong (*payload=None*)

Send a WebSocket pong to the peer.

A WebSocket pong may be sent unsolicited. This serves as a unidirectional heartbeat. A response to an unsolicited pong is “not expected”.

Parameters `payload` (*bytes*) – An (optional) arbitrary payload of length < 126 octets.

```
class autobahn.websocket.interfaces.IWebSocketServerChannelFactory (url=None,
                                                                    proto-
                                                                    cols=None,
                                                                    server=None,
                                                                    head-
                                                                    ers=None,
                                                                    external-
                                                                    Port=None)
```

WebSocket server protocol factories implement this interface, and create protocol instances which in turn implement `autobahn.websocket.interfaces.IWebSocketChannel`.

Parameters

- **url** (*str*) – The WebSocket URL this factory is working for, e.g. `ws://myhost.com/somepath`. For non-TCP transports like pipes or Unix domain sockets, provide `None`. This will use an implicit URL of `ws://localhost`.
- **protocols** (*list of str*) – List of subprotocols the server supports. The subprotocol used is the first from the list of subprotocols announced by the client that is contained in this list.
- **server** (*str*) – Server as announced in HTTP response header during opening handshake.
- **headers** (*dict*) – An optional mapping of additional HTTP headers to send during the WebSocket opening handshake.
- **externalPort** (*int*) – Optionally, the external visible port this server will be reachable under (i.e. when running behind a L2/L3 forwarding device).

resetProtocolOptions ()

Reset all WebSocket protocol options to defaults.

```
setProtocolOptions (versions=None, webStatus=None, utf8validateIncoming=None, maskServer-
                    Frames=None, requireMaskedClientFrames=None, applyMask=None,
                    maxFramePayloadSize=None, maxMessagePayloadSize=None, auto-
                    FragmentSize=None, failByDrop=None, echoCloseCodeReason=None,
                    openHandshakeTimeout=None, closeHandshakeTimeout=None, tcpN-
                    oDelay=None, perMessageCompressionAccept=None, autoPingInter-
                    val=None, autoPingTimeout=None, autoPingSize=None, serveFlash-
                    SocketPolicy=None, flashSocketPolicy=None, allowedOrigins=None,
                    allowNullOrigin=False, maxConnections=None, trustXForwardedFor=0)
```

Set WebSocket protocol options used as defaults for new protocol instances.

Parameters

- **versions** (*list of ints or None*) – The WebSocket protocol versions accepted by the server (default: `autobahn.websocket.protocol.WebSocketProtocol.SUPPORTED_PROTOCOL_VERSIONS()`).

- **webStatus** (*bool or None*) – Return server status/version on HTTP/GET without WebSocket upgrade header (default: *True*).
- **utf8validateIncoming** (*bool or None*) – Validate incoming UTF-8 in text message payloads (default: *True*).
- **maskServerFrames** (*bool or None*) – Mask server-to-client frames (default: *False*).
- **requireMaskedClientFrames** (*bool or None*) – Require client-to-server frames to be masked (default: *True*).
- **applyMask** (*bool or None*) – Actually apply mask to payload when mask it present. Applies for outgoing and incoming frames (default: *True*).
- **maxFramePayloadSize** (*int or None*) – Maximum frame payload size that will be accepted when receiving or *0* for unlimited (default: *0*).
- **maxMessagePayloadSize** (*int or None*) – Maximum message payload size (after reassembly of fragmented messages) that will be accepted when receiving or *0* for unlimited (default: *0*).
- **autoFragmentSize** (*int or None*) – Automatic fragmentation of outgoing data messages (when using the message-based API) into frames with payload length \leq this size or *0* for no auto-fragmentation (default: *0*).
- **failByDrop** – Fail connections by dropping the TCP connection without performing closing handshake (default: *True*).
- **echoCloseCodeReason** (*bool or None*) – Iff true, when receiving a close, echo back close code/reason. Otherwise reply with *code == 1000, reason = ""* (default: *False*).
- **openHandshakeTimeout** (*float or None*) – Opening WebSocket handshake timeout, timeout in seconds or *0* to deactivate (default: *0*).
- **closeHandshakeTimeout** (*float or None*) – When we expect to receive a closing handshake reply, timeout in seconds (default: *1*).
- **tcpNoDelay** (*bool or None*) – TCP NODELAY (“Nagle”) socket option (default: *True*).
- **perMessageCompressionAccept** (*callable or None*) – Acceptor function for offers.
- **autoPingInterval** (*float or None*) – Automatically send WebSocket pings every given seconds. When the peer does not respond in *autoPingTimeout*, drop the connection. Set to *0* to disable. (default: *0*).
- **autoPingTimeout** (*float or None*) – Wait this many seconds for the peer to respond to automatically sent pings. If the peer does not respond in time, drop the connection. Set to *0* to disable. (default: *0*).
- **autoPingSize** (*int or None*) – Payload size for automatic pings/pongs. Must be an integer from *[4, 125]*. (default: *4*).
- **serveFlashSocketPolicy** (*bool or None*) – Serve the Flash Socket Policy when we receive a policy file request on this protocol. (default: *False*).
- **flashSocketPolicy** (*str or None*) – The flash socket policy to be served when we are serving the Flash Socket Policy on this protocol and when Flash tried to connect to the destination port. It must end with a null character.

- **allowedOrigins** (*list or None*) – A list of allowed WebSocket origins (with ‘*’ as a wildcard character).
- **allowNullOrigin** (*bool*) – if True, allow WebSocket connections whose *Origin*: is “null”.
- **maxConnections** (*int or None*) – Maximum number of concurrent connections. Set to 0 to disable (default: 0).
- **trustXForwardedFor** (*int*) – Number of trusted web servers in front of this server that add their own X-Forwarded-For header (default: 0)

setSessionParameters (*url=None, protocols=None, server=None, headers=None, external-Port=None*)
 Set WebSocket session parameters.

Parameters

- **url** (*str*) – The WebSocket URL this factory is working for, e.g. `ws://myhost.com/somepath`. For non-TCP transports like pipes or Unix domain sockets, provide `None`. This will use an implicit URL of `ws://localhost`.
- **protocols** (*list of str*) – List of subprotocols the server supports. The subprotocol used is the first from the list of subprotocols announced by the client that is contained in this list.
- **server** (*str*) – Server as announced in HTTP response header during opening handshake.
- **headers** (*dict*) – An optional mapping of additional HTTP headers to send during the WebSocket opening handshake.
- **externalPort** (*int*) – Optionally, the external visible port this server will be reachable under (i.e. when running behind a L2/L3 forwarding device).

class `autobahn.websocket.interfaces.IWebSocketClientChannelFactory` (*url=None, origin=None, protocols=None, user-agent=None, headers=None, proxy=None*)

WebSocket client protocol factories implement this interface, and create protocol instances which in turn implement `autobahn.websocket.interfaces.IWebSocketChannel`.

Note that you **MUST** provide URL either here or set using `autobahn.websocket.IWebSocketClientFactory.setSessionParameters()` *before* the factory is started.

Parameters

- **url** (*str*) – WebSocket URL this factory will connect to, e.g. `ws://myhost.com/somepath?param1=23`. For non-TCP transports like pipes or Unix domain sockets, provide `None`. This will use an implicit URL of `ws://localhost`.
- **origin** (*str*) – The origin to be sent in WebSocket opening handshake or `None` (default: `None`).
- **protocols** (*list of strings*) – List of subprotocols the client should announce in WebSocket opening handshake (default: `[]`).

- **useragent** (*str*) – User agent as announced in HTTP request header or None (default: *AutobahnWebSocket/??.?*).
- **headers** (*dict*) – An optional mapping of additional HTTP headers to send during the WebSocket opening handshake.
- **proxy** (*dict or None*) – Explicit proxy server to use; a dict with *host* and *port* keys

resetProtocolOptions ()

Reset all WebSocket protocol options to defaults.

setProtocolOptions (*version=None, utf8validateIncoming=None, acceptMaskedServerFrames=None, maskClientFrames=None, applyMask=None, maxFramePayloadSize=None, maxMessagePayloadSize=None, autoFragmentSize=None, failByDrop=None, echoCloseCodeReason=None, serverConnectionDropTimeout=None, openHandshakeTimeout=None, closeHandshakeTimeout=None, tcpNoDelay=None, perMessageCompressionOffers=None, perMessageCompressionAccept=None, autoPingInterval=None, autoPingTimeout=None, autoPingSize=None*)

Set WebSocket protocol options used as defaults for `_new_` protocol instances.

Parameters

- **version** (*int*) – The WebSocket protocol spec (draft) version to be used (default: `autobahn.websocket.protocol.WebSocketProtocol.SUPPORTED_PROTOCOL_VERSIONS()`).
- **utf8validateIncoming** (*bool*) – Validate incoming UTF-8 in text message payloads (default: *True*).
- **acceptMaskedServerFrames** (*bool*) – Accept masked server-to-client frames (default: *False*).
- **maskClientFrames** (*bool*) – Mask client-to-server frames (default: *True*).
- **applyMask** (*bool*) – Actually apply mask to payload when mask it present. Applies for outgoing and incoming frames (default: *True*).
- **maxFramePayloadSize** (*int*) – Maximum frame payload size that will be accepted when receiving or *0* for unlimited (default: *0*).
- **maxMessagePayloadSize** (*int*) – Maximum message payload size (after reassembly of fragmented messages) that will be accepted when receiving or *0* for unlimited (default: *0*).
- **autoFragmentSize** (*int*) – Automatic fragmentation of outgoing data messages (when using the message-based API) into frames with payload length \leq this size or *0* for no auto-fragmentation (default: *0*).
- **failByDrop** – Fail connections by dropping the TCP connection without performing closing handshake (default: *True*).
- **echoCloseCodeReason** (*bool*) – Iff true, when receiving a close, echo back close code/reason. Otherwise reply with *code == 1000, reason = ""* (default: *False*).
- **serverConnectionDropTimeout** (*float*) – When the client expects the server to drop the TCP, timeout in seconds (default: *1*).
- **openHandshakeTimeout** (*float*) – Opening WebSocket handshake timeout, timeout in seconds or *0* to deactivate (default: *0*).
- **closeHandshakeTimeout** (*float*) – When we expect to receive a closing handshake reply, timeout in seconds (default: *1*).

- **tcpNoDelay** (*bool*) – TCP NODELAY (“Nagle”): bool socket option (default: *True*).
- **perMessageCompressionOffers** (*list of instance of subclass of PerMessageCompressOffer*) – A list of offers to provide to the server for the permessage-compress WebSocket extension. Must be a list of instances of subclass of PerMessageCompressOffer.
- **perMessageCompressionAccept** (*callable*) – Acceptor function for responses.
- **autoPingInterval** (*float or None*) – Automatically send WebSocket pings every given seconds. When the peer does not respond in *autoPingTimeout*, drop the connection. Set to 0 to disable. (default: 0).
- **autoPingTimeout** (*float or None*) – Wait this many seconds for the peer to respond to automatically sent pings. If the peer does not respond in time, drop the connection. Set to 0 to disable. (default: 0).
- **autoPingSize** (*int*) – Payload size for automatic pings/pongs. Must be an integer from [4, 125]. (default: 4).

setSessionParameters (*url=None, origin=None, protocols=None, useragent=None, headers=None, proxy=None*)

Set WebSocket session parameters.

Parameters

- **url** (*str*) – WebSocket URL this factory will connect to, e.g. *ws://myhost.com/somepath?param1=23*. For non-TCP transports like pipes or Unix domain sockets, provide *None*. This will use an implicit URL of *ws://localhost*.
- **origin** (*str*) – The origin to be sent in opening handshake.
- **protocols** (*list of strings*) – List of WebSocket subprotocols the client should announce in opening handshake.
- **useragent** (*str*) – User agent as announced in HTTP request header during opening handshake.
- **headers** (*dict*) – An optional mapping of additional HTTP headers to send during the WebSocket opening handshake.
- **proxy** (*dict or None*) – (Optional) a dict with *host* and *port* keys specifying a proxy to use

9.2.2 WebSocket Types

class `autobahn.websocket.types.ConnectionRequest` (*peer, headers, host, path, params, version, origin, protocols, extensions*)

Thin-wrapper for WebSocket connection request information provided in `autobahn.websocket.protocol.WebSocketServerProtocol.onConnect()` when a WebSocket client want to establish a connection to a WebSocket server.

Parameters

- **peer** (*str*) – Descriptor of the connecting client (e.g. IP address/port in case of TCP transports).
- **headers** (*dict*) – HTTP headers from opening handshake request.
- **host** (*str*) – Host from opening handshake HTTP header.

- **path** (*str*) – Path from requested HTTP resource URI. For example, a resource URI of `/myservice?foo=23&foo=66&bar=2` will be parsed to `/myservice`.
- **params** (*dict*) – Query parameters (if any) from requested HTTP resource URI. For example, a resource URI of `/myservice?foo=23&foo=66&bar=2` will be parsed to `{'foo': ['23', '66'], 'bar': ['2']}`.
- **version** (*int*) – The WebSocket protocol version the client announced (and will be spoken, when connection is accepted).
- **origin** (*str*) – The WebSocket origin header or `None`. Note that this only a reliable source of information for browser clients!
- **protocols** (*list*) – The WebSocket (sub)protocols the client announced. You must select and return one of those (or `None`) in `autobahn.websocket.WebSocketServerProtocol.onConnect()`.
- **extensions** (*list*) – The WebSocket extensions the client requested and the server accepted, and thus will be spoken, once the WebSocket connection has been fully established.

class `autobahn.websocket.types.ConnectionResponse` (*peer, headers, version, protocol, extensions*)

Thin-wrapper for WebSocket connection response information provided in `autobahn.websocket.protocol.WebSocketClientProtocol.onConnect()` when a WebSocket server has accepted a connection request by a client.

Constructor.

Parameters

- **peer** (*str*) – Descriptor of the connected server (e.g. IP address/port in case of TCP transport).
- **headers** (*dict*) – HTTP headers from opening handshake response.
- **version** (*int*) – The WebSocket protocol version that is spoken.
- **protocol** (*str*) – The WebSocket (sub)protocol in use.
- **extensions** (*list of str*) – The WebSocket extensions in use.

class `autobahn.websocket.types.ConnectionAccept` (*subprotocol=None, headers=None*)

Used by WebSocket servers to accept an incoming WebSocket connection. If the client announced one or multiple subprotocols, the server MUST select one of the subprotocols announced by the client.

Parameters

- **subprotocol** (*unicode or None*) – The WebSocket connection is accepted with the this WebSocket subprotocol chosen. The value must be a token as defined by RFC 2616.
- **headers** (*dict or None*) – Additional HTTP headers to send on the WebSocket opening handshake reply, e.g. cookies. The keys must be unicode, and the values either unicode or tuple/list. In the latter case a separate HTTP header line will be sent for each item in tuple/list.

exception `autobahn.websocket.types.ConnectionDeny` (*code, reason=None*)

Throw an instance of this class to deny a WebSocket connection during handshake in `autobahn.websocket.protocol.WebSocketServerProtocol.onConnect()`.

Parameters

- **code** (*int*) – HTTP error code.
- **reason** (*unicode*) – HTTP error reason.

BAD_REQUEST = 400

Bad Request. The request cannot be fulfilled due to bad syntax.

FORBIDDEN = 403

Forbidden. The request was a legal request, but the server is refusing to respond to it.[2] Unlike a 401 Unauthorized response, authenticating will make no difference.

INTERNAL_SERVER_ERROR = 500

Internal Server Error. A generic error message, given when no more specific message is suitable.

NOT_ACCEPTABLE = 406

Not Acceptable. The requested resource is only capable of generating content not acceptable according to the Accept headers sent in the request.

NOT_FOUND = 404

Not Found. The requested resource could not be found but may be available again in the future.[2] Subsequent requests by the client are permissible.

NOT_IMPLEMENTED = 501

Not Implemented. The server either does not recognize the request method, or it lacks the ability to fulfill the request.

REQUEST_TIMEOUT = 408

Request Timeout. The server timed out waiting for the request. According to W3 HTTP specifications: ‘The client did not produce a request within the time that the server was prepared to wait. The client MAY repeat the request without modifications at any later time.

SERVICE_UNAVAILABLE = 503

Service Unavailable. The server is currently unavailable (because it is overloaded or down for maintenance). Generally, this is a temporary state.

class autobahn.websocket.types.**Message**

Abstract base class for WebSocket messages.

class autobahn.websocket.types.**IncomingMessage** (*payload, is_binary=False*)

An incoming WebSocket message.

Parameters

- **payload** (*bytes*) – The WebSocket message payload, which can be UTF-8 encoded text or a binary string.
- **is_binary** (*bool*) – True for binary payload, else the payload contains UTF-8 encoded text.

class autobahn.websocket.types.**OutgoingMessage** (*payload, is_binary=False, skip_compress=False*)

An outgoing WebSocket message.

Parameters

- **payload** (*bytes*) – The WebSocket message payload, which can be UTF-8 encoded text or a binary string.
- **is_binary** (*bool*) – True iff payload is binary, else the payload contains UTF-8 encoded text.
- **skip_compress** (*bool*) – If True, never compress this message. This only has an effect when WebSocket compression has been negotiated on the WebSocket connection. Use when you know the payload is incompressible (e.g. encrypted or already compressed).

9.2.3 WebSocket Compression

class autobahn.websocket.compress.**PerMessageCompressOffer**

Base class for WebSocket compression parameter client offers.

class autobahn.websocket.compress.**PerMessageCompressOfferAccept**

Base class for WebSocket compression parameter client offer accepts by the server.

class autobahn.websocket.compress.**PerMessageCompressResponse**

Base class for WebSocket compression parameter server responses.

class autobahn.websocket.compress.**PerMessageCompressResponseAccept**

Base class for WebSocket compression parameter server response accepts by client.

class autobahn.websocket.compress.**PerMessageCompress**

Base class for WebSocket compression negotiated parameters.

class autobahn.websocket.compress.**PerMessageDeflateOffer** (*accept_no_context_takeover=True*,
accept_max_window_bits=True,
request_no_context_takeover=False,
request_max_window_bits=0)

Set of extension parameters for *permessage-deflate* WebSocket extension offered by a client to a server.

Parameters

- **accept_no_context_takeover** (*bool*) – When `True`, the client accepts the “no context takeover” feature.
- **accept_max_window_bits** (*bool*) – When `True`, the client accepts setting “max window size”.
- **request_no_context_takeover** (*bool*) – When `True`, the client request the “no context takeover” feature.
- **request_max_window_bits** (*int*) – When non-zero, the client requests the given “max window size” (must be an integer from the interval [8..15]).

get_extension_string()

Returns the WebSocket extension configuration string as sent to the server.

Returns PMCE configuration string.

Return type `str`

classmethod **parse** (*params*)

Parses a WebSocket extension offer for *permessage-deflate* provided by a client to a server.

Parameters **params** (*list*) – Output from `autobahn.websocket.WebSocketProtocol._parseExtensionsHeader()`.

Returns A new instance of `autobahn.compress.PerMessageDeflateOffer`.

Return type `obj`

```
class autobahn.websocket.compress.PerMessageDeflateOfferAccept (offer, re-  
quest_no_context_takeover=False,  
re-  
quest_max_window_bits=0,  
no_context_takeover=None,  
win-  
dow_bits=None,  
mem_level=None,  
max_message_size=None)
```

Set of parameters with which to accept an *permessage-deflate* offer from a client by a server.

Parameters

- **offer** (Instance of `autobahn.compress.PerMessageDeflateOffer`.) – The offer being accepted.
- **request_no_context_takeover** (*bool*) – When True, the server requests the “no context takeover” feature.
- **request_max_window_bits** – When non-zero, the server requests the given “max window size” (must be an integer from the interval [8..15]).
- **request_max_window_bits** – int
- **no_context_takeover** (*bool*) – Override server (“server-to-client direction”) context takeover (this must be compatible with the offer).
- **window_bits** (*int*) – Override server (“server-to-client direction”) window size (this must be compatible with the offer).
- **mem_level** (*int*) – Set server (“server-to-client direction”) memory level.

get_extension_string ()

Returns the WebSocket extension configuration string as sent to the server.

Returns PMCE configuration string.

Return type str

```
class autobahn.websocket.compress.PerMessageDeflateResponse (client_max_window_bits,  
client_no_context_takeover,  
server_max_window_bits,  
server_no_context_takeover)
```

Set of parameters for *permessage-deflate* responded by server.

Parameters

- **client_max_window_bits** (*int*) – FIXME
- **client_no_context_takeover** (*bool*) – FIXME
- **server_max_window_bits** (*int*) – FIXME
- **server_no_context_takeover** (*bool*) – FIXME

classmethod parse (*params*)

Parses a WebSocket extension response for *permessage-deflate* provided by a server to a client.

Parameters **params** (*list*) – Output from `autobahn.websocket.WebSocketProtocol._parseExtensionsHeader()`.

Returns A new instance of `autobahn.compress.PerMessageDeflateResponse`.

Return type obj

```
class autobahn.websocket.compress.PerMessageDeflateResponseAccept (response,
                                                                    no_context_takeover=None,
                                                                    win-
                                                                    dow_bits=None,
                                                                    mem_level=None,
                                                                    max_message_size=None)
```

Set of parameters with which to accept an *permessage-deflate* response from a server by a client.

Parameters

- **response** (Instance of `autobahn.compress.PerMessageDeflateResponse`.) – The response being accepted.
- **no_context_takeover** (*bool*) – Override client (“client-to-server direction”) context takeover (this must be compatible with response).
- **window_bits** (*int*) – Override client (“client-to-server direction”) window size (this must be compatible with response).
- **mem_level** (*int*) – Set client (“client-to-server direction”) memory level.

```
class autobahn.websocket.compress.PerMessageDeflate (is_server,
                                                    server_no_context_takeover,
                                                    client_no_context_takeover,
                                                    server_max_window_bits,
                                                    client_max_window_bits,
                                                    mem_level,
                                                    max_message_size=None)
```

permessage-deflate WebSocket extension processor.

```
class autobahn.websocket.compress.PerMessageBzip2Offer (accept_max_compress_level=True,
                                                         re-
                                                         quest_max_compress_level=0)
```

Set of extension parameters for *permessage-bzip2* WebSocket extension offered by a client to a server.

Constructor.

Parameters

- **accept_max_compress_level** (*bool*) – Iff true, client accepts “maximum compression level” parameter.
- **request_max_compress_level** (*int*) – Iff non-zero, client requests given “maximum compression level” - must be 1-9.

```
get_extension_string ()
```

Returns the WebSocket extension configuration string as sent to the server.

Returns PMCE configuration string.

Return type `str`

```
classmethod parse (params)
```

Parses a WebSocket extension offer for *permessage-bzip2* provided by a client to a server.

Parameters `params` (*list*) – Output from `autobahn.websocket.WebSocketProtocol._parseExtensionsHeader()`.

Returns object – A new instance of `autobahn.compress.PerMessageBzip2Offer`.

class autobahn.websocket.compress.**PerMessageBzip2OfferAccept** (*offer*, *request_max_compress_level=0*, *compress_level=None*)

Set of parameters with which to accept an *permessage-bzip2* offer from a client by a server.

Constructor.

Parameters

- **offer** (Instance of `autobahn.compress.PerMessageBzip2Offer`.) – The offer being accepted.
- **request_max_compress_level** (*int*) – Iff non-zero, server requests given “maximum compression level” - must be 1-9.
- **compress_level** (*int*) – Override server (“server-to-client direction”) compress level (this must be compatible with offer).

get_extension_string ()

Returns the WebSocket extension configuration string as sent to the server.

Returns PMCE configuration string.

Return type `str`

class autobahn.websocket.compress.**PerMessageBzip2Response** (*client_max_compress_level*, *server_max_compress_level*)

Set of parameters for *permessage-bzip2* responded by server.

classmethod **parse** (*params*)

Parses a WebSocket extension response for *permessage-bzip2* provided by a server to a client.

Parameters **params** (*list*) – Output from `autobahn.websocket.WebSocketProtocol._parseExtensionsHeader()`.

Returns A new instance of `autobahn.compress.PerMessageBzip2Response`.

Return type `obj`

class autobahn.websocket.compress.**PerMessageBzip2ResponseAccept** (*response*, *compress_level=None*)

Set of parameters with which to accept an *permessage-bzip2* response from a server by a client.

Parameters

- **response** (Instance of `autobahn.compress.PerMessageBzip2Response`.) – The response being accepted.
- **compress_level** (*int*) – Override client (“client-to-server direction”) compress level (this must be compatible with response).

class autobahn.websocket.compress.**PerMessageBzip2** (*is_server*, *server_max_compress_level*, *client_max_compress_level*)

permessage-bzip2 WebSocket extension processor.

9.2.4 WebSocket Utilities

WebSocket utilities that do not depend on the specific networking framework being used (Twisted or asyncio).

`autobahn.websocket.util.create_url` (*hostname*, *port=None*, *isSecure=False*, *path=None*,
params=None)

Create a WebSocket URL from components.

Parameters

- **hostname** (*str*) – WebSocket server hostname (for TCP/IP sockets) or filesystem path (for Unix domain sockets).
- **port** (*int or str*) – For TCP/IP sockets, WebSocket service port or None (to select default ports 80 or 443 depending on *isSecure*. When *hostname=="unix"*, this defines the path to the Unix domain socket instead of a TCP/IP network socket).
- **isSecure** (*bool*) – Set True for secure WebSocket (*wss* scheme).
- **path** (*str*) – WebSocket URL path of addressed resource (will be properly URL escaped). Ignored for RawSocket.
- **params** (*dict*) – A dictionary of key-values to construct the query component of the addressed WebSocket resource (will be properly URL escaped). Ignored for RawSocket.

Returns Constructed WebSocket URL.

Return type *str*

`autobahn.websocket.util.parse_url` (*url*)

Parses as WebSocket URL into it's components and returns a tuple:

- *isSecure* is a flag which is True for *wss* URLs.
- *host* is the hostname or IP from the URL.

and for TCP/IP sockets:

- *tcp_port* is the port from the URL or standard port derived from scheme (*rs => 80*, *rss => 443*).

or for Unix domain sockets:

- *uds_path* is the path on the local host filesystem.

Parameters *url* (*str*) – A valid WebSocket URL, i.e. *ws://localhost:9000* for TCP/IP sockets or *ws://unix:/tmp/file.sock* for Unix domain sockets (UDS).

Returns A 6-tuple (*isSecure*, *host*, *tcp_port*, *resource*, *path*, *params*) (TCP/IP) or (*isSecure*, *host*, *uds_path*, *resource*, *path*, *params*) (UDS).

Return type *tuple*

9.3 Module `autobahn.rawsocket`

WAMP-RawSocket is an alternative WAMP transport that has less overhead compared to WebSocket, and is vastly simpler to implement. It can run over any stream based underlying transport, such as TCP or Unix domain socket. However, it does NOT run into the browser.

9.3.1 RawSocket Utilities

RawSocket utilities that do not depend on the specific networking framework being used (Twisted or asyncio).

`autobahn.rawsocket.util.create_url` (*hostname*, *port=None*, *isSecure=False*)

Create a RawSocket URL from components.

Parameters

- **hostname** (*str*) – RawSocket server hostname (for TCP/IP sockets) or filesystem path (for Unix domain sockets).
- **port** (*int or str*) – For TCP/IP sockets, RawSocket service port or None (to select default ports 80 or 443 depending on *isSecure*. When *hostname*=="unix", this defines the path to the Unix domain socket instead of a TCP/IP network socket).
- **isSecure** (*bool*) – Set True for secure RawSocket (*rss* scheme).

Returns Constructed RawSocket URL.

Return type *str*

`autobahn.rawsocket.util.parse_url(url)`

Parses as RawSocket URL into it's components and returns a tuple:

- *isSecure* is a flag which is True for *rss* URLs.
- *host* is the hostname or IP from the URL.

and for TCP/IP sockets:

- *tcp_port* is the port from the URL or standard port derived from scheme (*rs* => 80, *rss* => 443).

or for Unix domain sockets:

- *uds_path* is the path on the local host filesystem.

Parameters *url* (*str*) – A valid RawSocket URL, i.e. *rs://localhost:9000* for TCP/IP sockets or *rs://unix:/tmp/file.sock* for Unix domain sockets (UDS).

Returns A 3-tuple (*isSecure*, *host*, *tcp_port*) (TCP/IP) or (*isSecure*, *host*, *uds_path*) (UDS).

Return type *tuple*

9.4 Module `autobahn.wamp`

9.4.1 WAMP Interfaces

class `autobahn.wamp.interfaces.IObjectSerializer`

Raw Python object serialization and deserialization. Object serializers are used by classes implementing WAMP serializers, that is instances of `autobahn.wamp.interfaces.ISerializer`.

BINARY

Flag (read-only) to indicate if serializer requires a binary clean transport or if UTF8 transparency is sufficient.

serialize (*obj*)

Serialize an object to a byte string.

Parameters *obj* (*any (serializable type)*) – Object to serialize.

Returns Serialized bytes.

Return type *bytes*

unserialize (*payload*)

Unserialize objects from a byte string.

Parameters `payload` (*bytes*) – Objects to unserialize.

Returns List of (raw) objects unserialized.

Return type *list*

class `autobahn.wamp.interfaces.ISerializer`

WAMP message serialization and deserialization.

MESSAGE_TYPE_MAP

Mapping of WAMP message type codes to WAMP message classes.

SERIALIZER_ID

The WAMP serialization format ID.

serialize (*message*)

Serializes a WAMP message to bytes for sending over a transport.

Parameters `message` (object implementing *autobahn.wamp.interfaces.IMessage*) – The WAMP message to be serialized.

Returns A pair (`payload`, `isBinary`).

Return type *tuple*

unserialize (*payload*, *isBinary*)

Deserialize bytes from a transport and parse into WAMP messages.

Parameters

- **payload** (*bytes*) – Byte string from wire.
- **is_binary** (*bool*) – Type of payload. True if payload is a binary string, else the payload is UTF-8 encoded Unicode text.

Returns List of `a.w.m.Message` objects.

Return type *list*

class `autobahn.wamp.interfaces.IMessage`

MESSAGE_TYPE

WAMP message type code.

static parse (*wmsg*)

Factory method that parses a unserialized raw message (as returned by `autobahn.interfaces.ISerializer.unserialize()`) into an instance of this class.

Returns The parsed WAMP message.

Return type object implementing *autobahn.wamp.interfaces.IMessage*

serialize (*serializer*)

Serialize this object into a wire level bytes representation and cache the resulting bytes. If the cache already contains an entry for the given serializer, return the cached representation directly.

Parameters `serializer` (object implementing *autobahn.wamp.interfaces.ISerializer*) – The wire level serializer to use.

Returns The serialized bytes.

Return type *bytes*

uncache ()

Resets the serialization cache for this message.

class `autobahn.wamp.interfaces.ITransport`

A WAMP transport is a bidirectional, full-duplex, reliable, ordered, message-based channel.

abort ()

Abort the transport abruptly. The transport will be destroyed as fast as possible, and without playing nice to the peer. This should only be used in case of fatal errors, protocol violations or possible detected attacks.

close ()

Close the transport regularly. The transport will perform any closing handshake if applicable. This should be used for any application initiated closing.

get_channel_id ()

Return the unique channel ID of the underlying transport. This is used to mitigate credential forwarding man-in-the-middle attacks when running application level authentication (eg WAMP-cryptosign) which are decoupled from the underlying transport.

The channel ID is only available when running over TLS (either WAMP-WebSocket or WAMP-RawSocket). It is not available for non-TLS transports (plain TCP or Unix domain sockets). It is also not available for WAMP-over-HTTP/Longpoll. Further, it is currently unimplemented for asyncio (only works on Twisted).

The channel ID is computed as follows:

- for a client, the SHA256 over the “TLS Finished” message sent by the client to the server is returned.
- for a server, the SHA256 over the “TLS Finished” message the server expected the client to send

Note: this is similar to *tls-unique* as described in RFC5929, but instead of returning the raw “TLS Finished” message, it returns a SHA256 over such a message. The reason is that we use the channel ID mainly with WAMP-cryptosign, which is based on Ed25519, where keys are always 32 bytes. And having a channel ID which is always 32 bytes (independent of the TLS ciphers/hashfuns in use) allows use to easily XOR channel IDs with Ed25519 keys and WAMP-cryptosign challenges.

WARNING: For safe use of this (that is, for safely binding app level authentication to the underlying transport), you MUST use TLS, and you SHOULD deactivate both TLS session renegotiation and TLS session resumption.

References:

- <https://tools.ietf.org/html/rfc5056>
- <https://tools.ietf.org/html/rfc5929>
- http://www.pyopenssl.org/en/stable/api/ssl.html#OpenSSL.SSL.Connection.get_finished
- http://www.pyopenssl.org/en/stable/api/ssl.html#OpenSSL.SSL.Connection.get_peer_finished

Returns The channel ID (if available) of the underlying WAMP transport. The channel ID is a 32 bytes value.

Return type `binary` or `None`

isOpen ()

Check if the transport is open for messaging.

Returns `True`, if the transport is open.

Return type `bool`

send (*message*)

Send a WAMP message over the transport to the peer. If the transport is not open, this raises `autobahn.wamp.exception.TransportLost`. Returns a deferred/future when the message has been pro-

cessed and more messages may be sent. When `send()` is called while a previous deferred/future has not yet fired, the send will fail immediately.

Parameters `message` (object implementing `autobahn.wamp.interfaces.IMessage`) – The WAMP message to send over the transport.

Returns `obj` – A Deferred/Future

class `autobahn.wamp.interfaces.ISession` (`config=None`)

Interface for WAMP sessions.

Parameters `config` (instance of `autobahn.wamp.types.ComponentConfig`) – Configuration for session.

call (`procedure`, `*args`, `**kwargs`)

Call a remote procedure.

This will return a Deferred/Future, that when resolved, provides the actual result returned by the called remote procedure.

- If the result is a single positional return value, it'll be returned “as-is”.
- If the result contains multiple positional return values or keyword return values, the result is wrapped in an instance of `autobahn.wamp.types.CallResult`.
- If the call fails, the returned Deferred/Future will be rejected with an instance of `autobahn.wamp.exception.ApplicationError`.

If `kwargs` contains an `options` keyword argument that is an instance of `autobahn.wamp.types.CallOptions`, this will provide specific options for the call to perform.

When the *Caller* and *Dealer* implementations support canceling of calls, the call may be canceled by canceling the returned Deferred/Future.

Parameters

- **procedure** (`unicode`) – The URI of the remote procedure to be called, e.g. `u"com.myapp.hello"`.
- **args** (`list`) – Any positional arguments for the call.
- **kwargs** (`dict`) – Any keyword arguments for the call.

Returns A Deferred/Future for the call result -

Return type instance of `twisted.internet.defer.Deferred` / `asyncio.Future`

define (`exception`, `error=None`)

Defines an exception for a WAMP error in the context of this WAMP session.

Parameters

- **exception** (A class that derives of `Exception`.) – The exception class to define an error mapping for.
- **error** (`str`) – The URI (or URI pattern) the exception class should be mapped for. If the `exception` class is decorated, this must be `None`.

disconnect ()

Close the underlying transport.

get_payload_codec ()

Get the current payload codec (if any) for the session.

Payload codecs are used with WAMP payload transparency mode.

Returns The current payload codec or `None` if no codec is active.

Return type object implementing `autobahn.wamp.interfaces.IPayloadCodec` or `None`

is_attached()

Check if the session has currently joined a realm.

is_connected()

Check if the underlying transport is connected.

join (*realm*, *authmethods=None*, *authid=None*, *authrole=None*, *authextra=None*, *resumable=None*, *resume_session=None*, *resume_token=None*)

Attach the session to the given realm. A session is open as soon as it is attached to a realm.

leave (*reason=None*, *message=None*)

Actively close this WAMP session.

Parameters

- **reason** (*str*) – An optional URI for the closing reason. If you want to permanently log out, this should be `wamp.close.logout`
- **message** (*str*) – An optional (human readable) closing message, intended for logging purposes.

Returns may return a Future/Deferred that fires when we've disconnected

onChallenge (*challenge*)

Callback fired when the peer demands authentication.

May return a Deferred/Future.

Parameters challenge (Instance of `autobahn.wamp.types.Challenge`.) – The authentication challenge.

onConnect ()

Callback fired when the transport this session will run over has been established.

onDisconnect ()

Callback fired when underlying transport has been closed.

onJoin (*details*)

Callback fired when WAMP session has been established.

May return a Deferred/Future.

Parameters details (Instance of `autobahn.wamp.types.SessionDetails`.) – Session information.

onLeave (*details*)

Callback fired when WAMP session has is closed

Parameters details (Instance of `autobahn.wamp.types.CloseDetails`.) – Close information.

onUserError (*fail*, *msg*)

This is called when we try to fire a callback, but get an exception from user code – for example, a registered publish callback or a registered method. By default, this prints the current stack-trace and then error-message to stdout.

ApplicationSession-derived objects may override this to provide logging if they prefer. The Twisted implementation does this. (See `autobahn.twisted.wamp.ApplicationSession`)

Parameters

- **fail** (*instance implementing `txaio.IFailedFuture`*) – The failure that occurred.
- **msg** (*str*) – an informative message from the library. It is suggested you log this immediately after the exception.

onWelcome (*welcome_msg*)

Callback fired after the peer has successfully authenticated. If this returns anything other than `None/False`, the session is aborted and the return value is used as an error message.

May return a `Deferred/Future`.

Parameters `welcome_msg` – The WELCOME message received from the server

Returns `None`, or an error message

publish (*topic, *args, **kwargs*)

Publish an event to a topic.

If `kwargs` contains an `options` keyword argument that is an instance of `autobahn.wamp.types.PublishOptions`, this will provide specific options for the publish to perform.

Note: By default, publications are non-acknowledged and the publication can fail silently, e.g. because the session is not authorized to publish to the topic.

When publication acknowledgement is requested via `options.acknowledge == True`, this function returns a `Deferred/Future`:

- If the publication succeeds the `Deferred/Future` will resolve to an object that implements `autobahn.wamp.interfaces.IPublication`.
- If the publication fails the `Deferred/Future` will reject with an instance of `autobahn.wamp.exception.ApplicationError`.

Parameters

- **topic** (*unicode*) – The URI of the topic to publish to, e.g. `u"com.myapp.mytopic1"`.
- **args** (*list*) – Arbitrary application payload for the event (positional arguments).
- **kwargs** (*dict*) – Arbitrary application payload for the event (keyword arguments).

Returns Acknowledgement for acknowledge publications - otherwise nothing.

Return type `None` or instance of `twisted.internet.defer.Deferred` / `asyncio.Future`

register (*endpoint, procedure=None, options=None, prefix=None*)

Register a procedure for remote calling.

When `endpoint` is a callable (function, method or object that implements `__call__`), then `procedure` must be provided and an instance of `twisted.internet.defer.Deferred` (when running on **Twisted**) or an instance of `asyncio.Future` (when running on **asyncio**) is returned.

- If the registration *succeeds* the returned `Deferred/Future` will *resolve* to an object that implements `autobahn.wamp.interfaces.IRegistration`.
- If the registration *fails* the returned `Deferred/Future` will *reject* with an instance of `autobahn.wamp.exception.ApplicationError`.

When `endpoint` is an object, then each of the object's methods that is decorated with `autobahn.wamp.register()` is automatically registered and a (single) `DeferredList` or `Future` is returned that gathers all individual underlying `Deferreds/Futures`.

Parameters

- **endpoint** (*callable or object*) – The endpoint called under the procedure.
- **procedure** (*unicode*) – When `endpoint` is a callable, the URI (or URI pattern) of the procedure to register for. When `endpoint` is an object, the argument is ignored (and should be `None`).
- **options** (instance of `autobahn.wamp.types.RegisterOptions`.) – Options for registering.
- **prefix** (*str*) – if not `None`, this specifies a prefix to prepend to all URIs registered for this class. So if there was an `@wamp.register('method_foo')` on a method and `prefix='com.something.'` then a method `'com.something.method_foo'` would ultimately be registered.

Returns A registration or a list of registrations (or errors)

Return type instance(s) of `twisted.internet.defer.Deferred` / `asyncio.Future`

set_payload_codec (*payload_codec*)

Set a payload codec on the session. To remove a previously set payload codec, set the codec to `None`.

Payload codecs are used with WAMP payload transparency mode.

Parameters **payload_codec** (object implementing `autobahn.wamp.interfaces.IPayloadCodec` or `None`) – The payload codec that should process application payload of the given encoding.

subscribe (*handler, topic=None, options=None*)

Subscribe to a topic for receiving events.

When `handler` is a callable (function, method or object that implements `__call__`), then `topic` must be provided and an instance of `twisted.internet.defer.Deferred` (when running on **Twisted**) or an instance of `asyncio.Future` (when running on **asyncio**) is returned.

- If the subscription succeeds the `Deferred/Future` will resolve to an object that implements `autobahn.wamp.interfaces.ISubscription`.
- If the subscription fails the `Deferred/Future` will reject with an instance of `autobahn.wamp.exception.ApplicationError`.

When `handler` is an object, then each of the object's methods that is decorated with `autobahn.wamp.subscribe()` is automatically subscribed as event handlers, and a list of `Deferreds/Futures` is returned that each resolves or rejects as above.

Parameters

- **handler** (*callable or object*) – The event handler to receive events.
- **topic** (*unicode*) – When `handler` is a callable, the URI (or URI pattern) of the topic to subscribe to. When `handler` is an object, this value is ignored (and should be `None`).
- **options** (An instance of `autobahn.wamp.types.SubscribeOptions`.) – Options for subscribing.

Returns A single `Deferred/Future` or a list of such objects

Return type instance(s) of `twisted.internet.defer.Deferred` / `asyncio.Future`

class `autobahn.wamp.interfaces.IPayloadCodec`

WAMP payload codecs are used with WAMP payload transparency mode.

In payload transparency mode, application payloads are transmitted “raw”, as binary strings, without any processing at the WAMP router.

Payload transparency can be used eg for these use cases:

- end-to-end encryption of application payloads (WAMP-cryptobox)
- using serializers with custom user types, where the serializer and the serializer implementation has native support for serializing custom types (such as CBOR)
- transmitting MQTT payloads within WAMP, when the WAMP router is providing a MQTT-WAMP bridge

decode (*is_originating*, *uri*, *encoded_payload*)

Decode application payload.

Parameters

- **is_originating** (*bool*) – Flag indicating whether the encoding is to be done from an originator (a caller or publisher).
- **uri** (*str*) – The WAMP URI associated with the WAMP message for which the payload is to be encoded (eg topic or procedure).
- **payload** (instance of `autobahn.wamp.types.EncodedPayload`) – The encoded application payload to be decoded.

Returns A tuple with the decoded positional and keyword-based application payload: (*uri*, *args*, *kwargs*)

Return type `tuple`

encode (*is_originating*, *uri*, *args=None*, *kwargs=None*)

Encodes application payload.

Parameters

- **is_originating** (*bool*) – Flag indicating whether the encoding is to be done from an originator (a caller or publisher).
- **uri** (*str*) – The WAMP URI associated with the WAMP message for which the payload is to be encoded (eg topic or procedure).
- **args** (*list or None*) – Positional application payload.
- **kwargs** (*dict or None*) – Keyword-based application payload.

Returns The encoded application payload or `None` to signal no encoding should be used.

Return type instance of `autobahn.wamp.types.EncodedPayload`

9.4.2 WAMP Types

class `autobahn.wamp.types.ComponentConfig` (*realm=None*, *extra=None*, *keyring=None*, *controller=None*, *shared=None*, *runner=None*)

WAMP application component configuration. An instance of this class is provided to the constructor of `autobahn.wamp.protocol.ApplicationSession`.

Parameters

- **realm** (*str*) – The realm the session would like to join or `None` to let the router auto-decide the realm (if the router is configured and allowing to do so).

- **extra** (*arbitrary*) – Optional user-supplied object with extra configuration. This can be any object you like, and is accessible in your *ApplicationSession* subclass via *self.config.extra*. *dict* is a good default choice. Important: if the component is to be hosted by Crossbar.io, the supplied value must be JSON serializable.
- **keyring** (*obj implementing IKeyRing or None*) – A mapper from WAMP URIs to “from”/”to” Ed25519 keys. When using WAMP end-to-end encryption, application payload is encrypted using a symmetric message key, which in turn is encrypted using the “to” URI (topic being published to or procedure being called) public key and the “from” URI private key. In both cases, the key for the longest matching URI is used.
- **controller** (*instance of ApplicationSession or None*) – A WAMP *ApplicationSession* instance that holds a session to a controlling entity. This optional feature needs to be supported by a WAMP component hosting run-time.
- **shared** (*dict or None*) – A dict object to exchange user information or hold user objects shared between components run under the same controlling entity. This optional feature needs to be supported by a WAMP component hosting run-time. Use with caution, as using this feature can introduce coupling between components. A valid use case would be to hold a shared database connection pool.
- **runner** (*autobahn.twisted.wamp.ApplicationRunner*) – Instance of *ApplicationRunner* when run under this.

class autobahn.wamp.types.**HelloReturn**

Base class for HELLO return information.

class autobahn.wamp.types.**Accept** (*realm=None, authid=None, authrole=None, authmethod=None, authprovider=None, authextra=None*)

Information to accept a HELLO.

Parameters

- **realm** (*str*) – The realm the client is joined to.
- **authid** (*str*) – The authentication ID the client is assigned, e.g. "joe" or "joe@example.com".
- **authrole** (*str*) – The authentication role the client is assigned, e.g. "anonymous", "user" or "com.myapp.user".
- **authmethod** (*str*) – The authentication method that was used to authenticate the client, e.g. "cookie" or "wampcra".
- **authprovider** (*str*) – The authentication provider that was used to authenticate the client, e.g. "mozilla-persona".
- **authextra** (*dict*) – Application-specific authextra to be forwarded to the client in *WELCOME.details.authextra*.

class autobahn.wamp.types.**Deny** (*reason=u'wamp.error.not_authorized', message=None*)

Information to deny a HELLO.

Parameters

- **reason** (*str*) – The reason of denying the authentication (an URI, e.g. u'wamp.error.not_authorized')
- **message** (*str*) – A human readable message (for logging purposes).

class autobahn.wamp.types.**Challenge** (*method, extra=None*)

Information to challenge the client upon HELLO.

Parameters

- **method** (*str*) – The authentication method for the challenge (e.g. "wampcra").
- **extra** (*dict*) – Any extra information for the authentication challenge. This is specific to the authentication method.

class autobahn.wamp.types.**HelloDetails** (*realm=None, authmethods=None, authid=None, authrole=None, authextra=None, session_roles=None, pending_session=None, resumable=None, resume_session=None, resume_token=None*)

Provides details of a WAMP session while still attaching.

Parameters

- **realm** (*str or None*) – The realm the client wants to join.
- **authmethods** (*list of str or None*) – The authentication methods the client is willing to perform.
- **authid** (*str or None*) – The authid the client wants to authenticate as.
- **authrole** (*str or None*) – The authrole the client wants to authenticate as.
- **authextra** (*arbitrary or None*) – Any extra information the specific authentication method requires the client to send.
- **session_roles** (*dict or None*) – The WAMP session roles and features by the connecting client.
- **pending_session** (*int or None*) – The session ID the session will get once successfully attached.
- **resumable** (*bool or None*) –
- **resume_session** (*int or None*) – The session the client would like to resume.
- **resume_token** (*str or None*) – The secure authorisation token to resume the session.

class autobahn.wamp.types.**SessionDetails** (*realm, session, authid=None, authrole=None, authmethod=None, authprovider=None, authextra=None, resumed=None, resumable=None, resume_token=None*)

Provides details for a WAMP session upon open.

See also:

autobahn.wamp.interfaces.ISession.onJoin()

Parameters

- **realm** (*str*) – The realm this WAMP session is attached to.
- **session** (*int*) – WAMP session ID of this session.
- **resumed** (*bool or None*) – Whether the session is a resumed one.
- **resumable** (*bool or None*) – Whether this session can be resumed later.
- **resume_token** (*str or None*) – The secure authorisation token to resume the session.

class autobahn.wamp.types.**SessionIdent** (*session=None, authid=None, authrole=None*)
WAMP session identification information.

A WAMP session joined on a realm on a WAMP router is identified technically by its session ID (`session`) already.

The permissions the session has are tied to the WAMP authentication role (`authrole`).

The subject behind the session, eg the user or the application component is identified by the WAMP authentication ID (`authid`). One session is always authenticated under/as one specific `authid`, but a given `authid` might have zero, one or many sessions joined on a router at the same time.

Parameters

- **session** (*int*) – WAMP session ID of the session.
- **authid** (*str*) – The WAMP authid of the session.
- **authrole** (*str*) – The WAMP authrole of the session.

static from_calldetails (*call_details*)

Create a new session identification object from the caller information in the call details provided.

Parameters **call_details** (*autobahn.wamp.types.CallDetails*) – Details of a WAMP call.

Returns New session identification object.

Return type *autobahn.wamp.types.SessionIdent*

static from_eventdetails (*event_details*)

Create a new session identification object from the publisher information in the event details provided.

Parameters **event_details** (*autobahn.wamp.types.EventDetails*) – Details of a WAMP event.

Returns New session identification object.

Return type *autobahn.wamp.types.SessionIdent*

class *autobahn.wamp.types*.**CloseDetails** (*reason=None, message=None*)

Provides details for a WAMP session upon close.

See also:

autobahn.wamp.interfaces.ISession.onLeave()

Parameters

- **reason** (*str*) – The close reason (an URI, e.g. `wamp.close.normal`)
- **message** (*str*) – Closing log message.

class *autobahn.wamp.types*.**SubscribeOptions** (*match=None, details=None, details_arg=None, forward_for=None, get_retained=None, correlation_id=None, correlation_uri=None, correlation_is_anchor=None, correlation_is_last=None*)

Used to provide options for subscribing in `autobahn.wamp.interfaces.ISubscriber.subscribe()`.

Parameters

- **match** (*str*) – The topic matching method to be used for the subscription.
- **details** (*bool*) – When invoking the handler, provide event details in a keyword parameter `details`.

- **details_arg** (*str*) – DEPRECATED (use “details” flag). When invoking the handler provide event details in this keyword argument to the callable.
- **get_retained** (*bool or None*) – Whether the client wants the retained message we may have along with the subscription.

message_attr ()

Returns options dict as sent within WAMP messages.

class autobahn.wamp.types.**EventDetails** (*subscription, publication, publisher=None, publisher_authid=None, publisher_authrole=None, topic=None, retained=None, enc_algo=None, forward_for=None*)

Provides details on an event when calling an event handler previously registered.

Parameters

- **subscription** (instance of `autobahn.wamp.request.Subscription`) – The (client side) subscription object on which this event is delivered.
- **publication** (*int*) – The publication ID of the event (always present).
- **publisher** (*None or int*) – The WAMP session ID of the original publisher of this event. Only filled when publisher is disclosed.
- **publisher_authid** (*str or None*) – The WAMP authid of the original publisher of this event. Only filled when publisher is disclosed.
- **publisher_authrole** (*str or None*) – The WAMP authrole of the original publisher of this event. Only filled when publisher is disclosed.
- **topic** (*str or None*) – For pattern-based subscriptions, the actual topic URI being published to. Only filled for pattern-based subscriptions.
- **retained** (*bool or None*) – Whether the message was retained by the broker on the topic, rather than just published.
- **enc_algo** (*str or None*) – Payload encryption algorithm that was in use (currently, either `None` or `u'cryptobox'`).
- **forward_for** (*list[dict]*) – When this Event is forwarded for a client (or from an intermediary router).

class autobahn.wamp.types.**PublishOptions** (*acknowledge=None, exclude_me=None, exclude=None, exclude_authid=None, exclude_authrole=None, eligible=None, eligible_authid=None, eligible_authrole=None, retain=None, forward_for=None, correlation_id=None, correlation_uri=None, correlation_is_anchor=None, correlation_is_last=None*)

Used to provide options for subscribing in `autobahn.wamp.interfaces.IPublisher.publish()`.

Parameters

- **acknowledge** (*bool*) – If `True`, acknowledge the publication with a success or error response.
- **exclude_me** (*bool or None*) – If `True`, exclude the publisher from receiving the event, even if he is subscribed (and eligible).
- **exclude** (*int or list of int or None*) – A single WAMP session ID or a list thereof to exclude from receiving this event.

- **exclude_authid** (*str* or *list of str* or *None*) – A single WAMP authid or a list thereof to exclude from receiving this event.
- **exclude_authrole** (*list of str* or *None*) – A single WAMP authrole or a list thereof to exclude from receiving this event.
- **eligible** (*int* or *list of int* or *None*) – A single WAMP session ID or a list thereof eligible to receive this event.
- **eligible_authid** (*str* or *list of str* or *None*) – A single WAMP authid or a list thereof eligible to receive this event.
- **eligible_authrole** (*str* or *list of str* or *None*) – A single WAMP authrole or a list thereof eligible to receive this event.
- **retain** (*bool* or *None*) – If `True`, request the broker retain this event.
- **forward_for** (*list[dict]*) – When this Event is forwarded for a client (or from an intermediary router).

message_attr ()

Returns options dict as sent within WAMP messages.

```
class autobahn.wamp.types.RegisterOptions (match=None,      invoke=None,      concu-
                                         rency=None,      force_reregister=None,
                                         forward_for=None,  details=None,  de-
                                         tails_arg=None, correlation_id=None, correla-
                                         tion_uri=None,  correlation_is_anchor=None,
                                         correlation_is_last=None)
```

Used to provide options for registering in `autobahn.wamp.interfaces.ICallee.register()`.

Parameters

- **match** – Type of matching to use on the URI (*exact*, *prefix* or *wildcard*)
- **invoke** – Type of invoke mechanism to use (*single*, *first*, *last*, *roundrobin*, *random*)
- **concurrency** – if used, the number of times a particular endpoint may be called concurrently (e.g. if this is 3, and there are already 3 calls in-progress a 4th call will receive an error)
- **details_arg** (*str*) – When invoking the endpoint, provide call details in this keyword argument to the callable.
- **details** (*bool*) – When invoking the endpoint, provide call details in a keyword parameter `details`.
- **details_arg** – DEPRECATED (use “details” flag). When invoking the endpoint, provide call details in this keyword argument to the callable.
- **force_reregister** (*bool*) – if `True`, any other session that has already registered this URI will be ‘kicked out’ and this session will become the one that’s registered (the previous session must have used `force_reregister=True` as well)
- **forward_for** (*list[dict]*) – When this Register is forwarded over a router-to-router link, or via an intermediary router.

message_attr ()

Returns options dict as sent within WAMP messages.

```
class autobahn.wamp.types.CallDetails (registration,  progress=None,  caller=None,
                                         caller_authid=None,  caller_authrole=None,  pro-
                                         cedure=None,  enc_algo=None,  forward_for=None)
```

Provides details on a call when an endpoint previously registered is being called and opted to receive call details.

Parameters

- **registration** (instance of `autobahn.wamp.request.Registration`) – The (client side) registration object this invocation is delivered on.
- **progress** (*callable or None*) – A callable that will receive progressive call results.
- **caller** (*int or None*) – The WAMP session ID of the caller, if the latter is disclosed. Only filled when caller is disclosed.
- **caller_authid** (*str or None*) – The WAMP authid of the original caller of this event. Only filled when caller is disclosed.
- **caller_authrole** (*str or None*) – The WAMP authrole of the original caller of this event. Only filled when caller is disclosed.
- **procedure** (*str or None*) – For pattern-based registrations, the actual procedure URI being called.
- **enc_algo** (*str or None*) – Payload encryption algorithm that was in use (currently, either *None* or “*cryptobox*”).
- **forward_for** (*list[dict]*) – When this Call is forwarded for a client (or from an intermediary router).

```
class autobahn.wamp.types.CallOptions (on_progress=None, timeout=None, caller=None,
                                       caller_authid=None, caller_authrole=None, forward_for=None,
                                       correlation_id=None, correlation_uri=None, correlation_is_anchor=None,
                                       correlation_is_last=None, details=None)
```

Used to provide options for calling with `autobahn.wamp.interfaces.ICaller.call()`.

Parameters

- **on_progress** (*callable*) – A callback that will be called when the remote endpoint called yields interim call progress results.
- **timeout** (*float*) – Time in seconds after which the call should be automatically canceled.
- **forward_for** (*list[dict]*) – When this Call is forwarded for a client (or from an intermediary router).

```
message_attr ()
```

Returns options dict as sent within WAMP messages.

```
class autobahn.wamp.types.CallResult (*results, **kwresults)
```

Wrapper for remote procedure call results that contain multiple positional return values or keyword-based return values.

Parameters

- **results** (*list*) – The positional result values.
- **kwresults** (*dict*) – The keyword result values.

```
class autobahn.wamp.types.EncodedPayload (payload, enc_algo, enc_serializer=None,
                                           enc_key=None)
```

Wrapper holding an encoded application payload when using WAMP payload transparency.

Parameters

- **payload** (*bytes*) – The encoded application payload.
- **enc_algo** (*str*) – The payload transparency algorithm identifier to check.

- **enc_serializer** (*str*) – The payload transparency serializer identifier to check.
- **enc_key** (*str* or *None*) – If using payload transparency with an encryption algorithm, the payload encryption key.

9.4.3 WAMP Exceptions

exception `autobahn.wamp.exception.Error`

Base class for all exceptions related to WAMP.

exception `autobahn.wamp.exception.SessionNotReady`

The application tried to perform a WAMP interaction, but the session is not yet fully established.

exception `autobahn.wamp.exception.SerializationError`

Exception raised when the WAMP serializer could not serialize the application payload (`args` or `kwargs` for `CALL`, `PUBLISH`, etc).

exception `autobahn.wamp.exception.ProtocolError`

Exception raised when WAMP protocol was violated. Protocol errors are fatal and are handled by the WAMP implementation. They are not supposed to be handled at the application level.

exception `autobahn.wamp.exception.TransportLost`

Exception raised when the transport underlying the WAMP session was lost or is not connected.

exception `autobahn.wamp.exception.ApplicationError` (*error*, **args*, ***kwargs*)

Base class for all exceptions that can/may be handled at the application level.

Parameters *error* (*str*) – The URI of the error that occurred, e.g. `wamp.error.not_authorized`.

AUTHENTICATION_FAILED = `u'wamp.error.authentication_failed'`

Something failed with the authentication itself, that is, authentication could not run to end.

AUTHORIZATION_FAILED = `u'wamp.error.authorization_failed'`

A Dealer or Broker could not determine if the *Peer* is authorized to perform a join, call, register, publish or subscribe, since the authorization operation *itself* failed. E.g. a custom authorizer did run into an error.

CANCELED = `u'wamp.error.canceled'`

A Dealer or Callee canceled a call previously issued (WAMP AP).

CLOSE_REALM = `u'wamp.error.close_realm'`

The *Peer* want to leave the realm - used as a GOODBYE reason.

ENC_DECRYPT_ERROR = `u'wamp.error.encryption.decrypt_error'`

WAMP-cryptobox application payload end-to-end encryption error.

ENC_NO_PAYLOAD_CODEC = `u'wamp.error.no_payload_codec'`

WAMP message in payload transparency mode received, but no codec set or codec did not decode the payload.

ENC_TRUSTED_URI_MISMATCH = `u'wamp.error.encryption.trusted_uri_mismatch'`

WAMP-cryptobox application payload end-to-end encryption error.

GOODBYE_AND_OUT = `u'wamp.error.goodbye_and_out'`

A *Peer* acknowledges ending of a session - used as a GOODBYE reply reason.

INVALID_ARGUMENT = `u'wamp.error.invalid_argument'`

A call failed, since the given argument types or values are not acceptable to the called procedure - in which case the *Callee* may throw this error. Or a Router performing *payload validation* checked the payload (`args` / `kwargs`) of a call, call result, call error or publish, and the payload did not conform.

INVALID_PAYLOAD = u'wamp.error.invalid_payload'

The application payload could not be serialized.

INVALID_URI = u'wamp.error.invalid_uri'

Peer provided an incorrect URI for a URI-based attribute of a WAMP message such as a realm, topic or procedure.

NOT_AUTHORIZED = u'wamp.error.not_authorized'

A call, register, publish or subscribe failed, since the session is not authorized to perform the operation.

NO_AUTH_METHOD = u'wamp.error.no_auth_method'

No authentication method the peer offered is available or active.

NO_ELIGIBLE_CALLEE = u'wamp.error.no_eligible_callee'

A *Dealer* could not perform a call, since a procedure with the given URI is registered, but *Callee Black-and Whitelisting* and/or *Caller Exclusion* lead to the exclusion of (any) *Callee* providing the procedure (WAMP AP).

NO_SUCH_PRINCIPAL = u'wamp.error.no_such_principal'

A *Peer* was authenticated for an authid that does not or longer exists.

NO_SUCH_PROCEDURE = u'wamp.error.no_such_procedure'

A *Dealer* could not perform a call, since not procedure is currently registered under the given URI.

NO_SUCH_REALM = u'wamp.error.no_such_realm'

Peer wanted to join a non-existing realm (and the *Router* did not allow to auto-create the realm).

NO_SUCH_REGISTRATION = u'wamp.error.no_such_registration'

A *Dealer* could not perform a unregister, since the given registration is not active.

NO_SUCH_ROLE = u'wamp.error.no_such_role'

A *Peer* was to be authenticated under a Role that does not (or no longer) exists on the *Router*. For example, the *Peer* was successfully authenticated, but the Role configured does not exists - hence there is some misconfiguration in the *Router*.

NO_SUCH_SESSION = u'wamp.error.no_such_session'

A router could not perform an operation, since a session ID specified was non-existent.

NO_SUCH_SUBSCRIPTION = u'wamp.error.no_such_subscription'

A *Broker* could not perform a unsubscribe, since the given subscription is not active.

PAYLOAD_SIZE_EXCEEDED = u'wamp.error.payload_size_exceeded'

The application payload could not be transported because the serialized/framed payload exceeds the transport limits.

PROCEDURE_ALREADY_EXISTS = u'wamp.error.procedure_already_exists'

A procedure could not be registered, since a procedure with the given URI is already registered.

PROCEDURE_EXISTS_INVOCATION_POLICY_CONFLICT = u'wamp.error.procedure_exists_with_diffe

A procedure could not be registered, since a procedure with the given URI is already registered, and the registration has a conflicting invocation policy.

SYSTEM_SHUTDOWN = u'wamp.error.system_shutdown'

The *Peer* is shutting down completely - used as a GOODBYE (or ABORT) reason.

TIMEOUT = u'wamp.error.timeout'

A pending (in-flight) call was timed out.

error_message ()

Get the error message of this exception.

Returns The error message.

Return type `str`

exception `autobahn.wamp.exception.NotAuthorized`
Not authorized to perform the respective action.

exception `autobahn.wamp.exception.InvalidUri`
The URI for a topic, procedure or error is not a valid WAMP URI.

9.4.4 WAMP Authentication and Encryption

class `autobahn.wamp.auth.AuthScram` (**kw)
Bases: `object`

Implements “wamp-scram” authentication for components.

NOTE: This is a prototype of a draft spec; see <https://github.com/wamp-proto/wamp-proto/issues/135>

on_welcome (*session*, *authextra*)

When the server is satisfied, it sends a ‘WELCOME’ message.

This hook allows us an opportunity to deny the session right before it gets set up – we check the server-signature thus authorizing the server and if it fails we drop the connection.

`autobahn.wamp.auth.pbkdf2` (*data*, *salt*, *iterations=1000*, *keylen=32*, *hashfunc=None*)

Returns a binary digest for the PBKDF2 hash algorithm of *data* with the given *salt*. It iterates *iterations* time and produces a key of *keylen* bytes. By default SHA-256 is used as hash function, a different hashlib *hashfunc* can be provided.

Parameters

- **data** (*bytes*) – The data for which to compute the PBKDF2 derived key.
- **salt** (*bytes*) – The salt to use for deriving the key.
- **iterations** (*int*) – The number of iterations to perform in PBKDF2.
- **keylen** (*int*) – The length of the cryptographic key to derive.
- **hashfunc** (*str*) – Name of the hash algorithm to use

Returns The derived cryptographic key.

Return type `bytes`

`autobahn.wamp.auth.generate_totp_secret` (*length=10*)

Generates a new Base32 encoded, random secret.

See also:

<http://en.wikipedia.org/wiki/Base32>

Parameters **length** (*int*) – The length of the entropy used to generate the secret.

Returns The generated secret in Base32 (letters A–Z and digits 2–7). The length of the generated secret is $\text{length} * 8 / 5$ octets.

Return type `unicode`

`autobahn.wamp.auth.compute_totp` (*secret*, *offset=0*)

Computes the current TOTP code.

Parameters

- **secret** (*unicode*) – Base32 encoded secret.

- **offset** (*int*) – Time offset (in steps, use eg -1, 0, +1 for compliance with RFC6238) for which to compute TOTP.

Returns TOTP for current time (+/- offset).

Return type unicode

`autobahn.wamp.auth.derive_key` (*secret, salt, iterations=1000, keylen=32*)

Computes a derived cryptographic key from a password according to PBKDF2.

See also:

<http://en.wikipedia.org/wiki/PBKDF2>

Parameters

- **secret** (*bytes or unicode*) – The secret.
- **salt** (*bytes or unicode*) – The salt to be used.
- **iterations** (*int*) – Number of iterations of derivation algorithm to run.
- **keylen** (*int*) – Length of the key to derive in bytes.

Returns The derived key in Base64 encoding.

Return type bytes

`autobahn.wamp.auth.generate_wcs` (*length=14*)

Generates a new random secret for use with WAMP-CRA.

The secret generated is a random character sequence drawn from

- upper and lower case latin letters
- digits
-

Parameters **length** (*int*) – The length of the secret to generate.

Returns The generated secret. The length of the generated is `length` octets.

Return type bytes

`autobahn.wamp.auth.compute_wcs` (*key, challenge*)

Compute an WAMP-CRA authentication signature from an authentication challenge and a (derived) key.

Parameters

- **key** (*bytes*) – The key derived (via PBKDF2) from the secret.
- **challenge** (*bytes*) – The authentication challenge to sign.

Returns The authentication signature.

Return type bytes

class `autobahn.wamp.cryptobox.EncodedPayload` (*payload, enc_algo, enc_serializer=None, enc_key=None*)

Wrapper holding an encoded application payload when using WAMP payload transparency.

Parameters

- **payload** (*bytes*) – The encoded application payload.
- **enc_algo** (*str*) – The payload transparency algorithm identifier to check.

- **enc_serializer** (*str*) – The payload transparency serializer identifier to check.
- **enc_key** (*str* or *None*) – If using payload transparency with an encryption algorithm, the payload encryption key.

9.5 Module `autobahn.wamp.component`

9.5.1 Component

This is common code for both Twisted and asyncio components; see either `autobahn.twisted.component.Component` or `autobahn.asyncio.component.Component` for the concrete implementations.

```
class autobahn.wamp.component.Component (main=None, transports=None, config=None,
                                           realm=u'realm1', extra=None, authentication=None,
                                           session_factory=None, is_fatal=None)
```

A WAMP application component. A component holds configuration for (and knows how to create) transports and sessions.

Parameters

- **main** (*callable taking 2 args: reactor, ISession*) – After a transport has been connected and a session has been established and joined to a realm, this (async) procedure will be run until it finishes – which signals that the component has run to completion. In this case, it usually doesn't make sense to use the `on_*` kwargs. If you do not pass a `main()` procedure, the session will not be closed (unless you arrange for `.leave()` to be called).
- **transports** (*None or unicode or list of dicts*) – Transport configurations for creating transports. Each transport can be a WAMP URL, or a dict containing the following configuration keys:
 - `type` (optional): `websocket` (default) or `rawsocket`
 - `url`: the router URL
 - **endpoint** (optional, derived from URL if not provided):
 - * `type`: “tcp” or “unix”
 - * `host,port`: only for TCP
 - * `path`: only for unix
 - * `timeout`: in seconds
 - * `tls`: `True` or (under Twisted) an `twisted.internet.ssl.IOpenSSLClientComponentCreator` instance (such as returned from `twisted.internet.ssl.optionsForClientTLS`) or `CertificateOptions` instance.
- **realm** (*unicode*) – the realm to join
- **authentication** (*dict mapping auth_type to dict*) – configuration of authenticators
- **session_factory** (*callable*) – if `None`, `ApplicationSession` is used, otherwise a callable taking a single `config` argument that is used to create a new `ApplicationSession` instance.

- **is_fatal** (*callable taking one arg, or None*) – a callable taking a single argument, an `Exception` instance. The callable should return `True` if this error is “fatal”, meaning we should not try connecting to the current transport again. The default behavior (on `None`) is to always return `False`

on_connect (*fn*)

A decorator as a shortcut for listening for ‘connect’ events.

on_connectfailure (*fn*)

A decorator as a shortcut for listening for ‘connectfailure’ events.

on_disconnect (*fn*)

A decorator as a shortcut for listening for ‘disconnect’ events.

on_join (*fn*)

A decorator as a shortcut for listening for ‘join’ events.

For example:

```
@component.on_join
def joined(session, details):
    print("Session {} joined: {}".format(session, details))
```

on_leave (*fn*)

A decorator as a shortcut for listening for ‘leave’ events.

on_ready (*fn*)

A decorator as a shortcut for listening for ‘ready’ events.

register (*uri, options=None*)

A decorator as a shortcut for registering during on-join

For example:

```
@component.register(
    u"com.example.add",
    options=RegisterOptions(invoke='round_robin'),
)
def add(*args, **kw):
    print("add({}, {}): event received".format(args, kw))
```

session_factory = None

The factory of the session we will instantiate.

subscribe (*topic, options=None*)

A decorator as a shortcut for subscribing during on-join

For example:

```
@component.subscribe(
    u"some.topic",
    options=SubscribeOptions(match=u'prefix'),
)
def topic(*args, **kw):
    print("some.topic({}, {}): event received".format(args, kw))
```

9.6 Module `autobahn.twisted`

Autobahn Twisted specific classes. These are used when Twisted is run as the underlying networking framework.

9.6.1 Component

The component API provides a high-level functional style method of defining and running WAMP components including authentication configuration

```
class autobahn.twisted.component.Component (main=None, transports=None, config=None,  
realm=u'realm1', extra=None, authentication=None, session_factory=None,  
is_fatal=None)
```

A component establishes a transport and attached a session to a realm using the transport for communication.

The transports a component tries to use can be configured, as well as the auto-reconnect strategy.

Parameters

- **main** (*callable taking 2 args: reactor, ISession*) – After a transport has been connected and a session has been established and joined to a realm, this (async) procedure will be run until it finishes – which signals that the component has run to completion. In this case, it usually doesn't make sense to use the `on_*` kwargs. If you do not pass a `main()` procedure, the session will not be closed (unless you arrange for `.leave()` to be called).
- **transports** (*None or unicode or list of dicts*) – Transport configurations for creating transports. Each transport can be a WAMP URL, or a dict containing the following configuration keys:
 - `type` (optional): `websocket` (default) or `rawsocket`
 - `url`: the router URL
 - **endpoint** (optional, derived from URL if not provided):
 - * `type`: “tcp” or “unix”
 - * `host, port`: only for TCP
 - * `path`: only for unix
 - * `timeout`: in seconds
 - * `tls`: `True` or (under Twisted) an `twisted.internet.ssl.IOpenSSLClientComponentCreator` instance (such as returned from `twisted.internet.ssl.optionsForClientTLS`) or `CertificateOptions` instance.
- **realm** (*unicode*) – the realm to join
- **authentication** (*dict mapping auth_type to dict*) – configuration of authenticators
- **session_factory** (*callable*) – if `None`, `ApplicationSession` is used, otherwise a callable taking a single `config` argument that is used to create a new `ApplicationSession` instance.
- **is_fatal** (*callable taking one arg, or None*) – a callable taking a single argument, an `Exception` instance. The callable should return `True` if this error is “fatal”, meaning we should not try connecting to the current transport again. The default behavior (on `None`) is to always return `False`

session_factory

alias of `autobahn.twisted.wamp.Session`

start (*reactor=None*)

This starts the Component, which means it will start connecting (and re-connecting) to its configured transports. A Component runs until it is “done”, which means one of: - There was a “main” function defined, and it completed successfully; - Something called `.leave()` on our session, and we left successfully; - `.stop()` was called, and completed successfully; - none of our transports were able to connect successfully (failure); :returns: a Deferred that fires (with `None`) when we are

“done” or with a Failure if something went wrong.

`autobahn.twisted.component.run(components, log_level='info')`

High-level API to run a series of components.

This will only return once all the components have stopped (including, possibly, after all re-connections have failed if you have re-connections enabled). Under the hood, this calls `twisted.internet.reactor.run()` – if you wish to manage the reactor loop yourself, use the `autobahn.twisted.component.Component.start()` method to start each component yourself.

Parameters

- **components** (*Component or list of Components*) – the Component(s) you wish to run
- **log_level** (*string*) – a valid log-level (or `None` to avoid calling `start_logging`)

9.6.2 WebSocket Protocols and Factories

Classes for WebSocket clients and servers using Twisted.

class `autobahn.twisted.websocket.WebSocketServerProtocol`

Base class for Twisted-based WebSocket server protocols.

Implements `autobahn.websocket.interfaces.IWebSocketChannel`.

get_channel_id (*channel_id_type='u'tls-unique'*)

Implements `autobahn.wamp.interfaces.ITransport.get_channel_id()`

class `autobahn.twisted.websocket.WebSocketClientProtocol`

Base class for Twisted-based WebSocket client protocols.

Implements `autobahn.websocket.interfaces.IWebSocketChannel`.

get_channel_id (*channel_id_type='u'tls-unique'*)

Implements `autobahn.wamp.interfaces.ITransport.get_channel_id()`

class `autobahn.twisted.websocket.WebSocketServerFactory(*args, **kwargs)`

Base class for Twisted-based WebSocket server factories.

Implements `autobahn.websocket.interfaces.IWebSocketServerChannelFactory`

Note: In addition to all arguments to the constructor of `autobahn.websocket.interfaces.IWebSocketServerChannelFactory()`, you can supply a `reactor` keyword argument to specify the Twisted reactor to be used.

class `autobahn.twisted.websocket.WebSocketClientFactory(*args, **kwargs)`

Base class for Twisted-based WebSocket client factories.

Implements `autobahn.websocket.interfaces.IWebSocketClientChannelFactory`

Note: In addition to all arguments to the constructor of `autobahn.websocket.interfaces.IWebSocketClientChannelFactory()`, you can supply a reactor keyword argument to specify the Twisted reactor to be used.

9.6.3 WAMP-over-WebSocket Protocols and Factories

Classes for WAMP-WebSocket clients and servers using Twisted.

class `autobahn.twisted.websocket.WampWebSocketServerProtocol`
Twisted-based WAMP-over-WebSocket server protocol.

Implements:

- `autobahn.wamp.interfaces.ITransport`

class `autobahn.twisted.websocket.WampWebSocketClientProtocol`
Twisted-based WAMP-over-WebSocket client protocol.

Implements:

- `autobahn.wamp.interfaces.ITransport`

class `autobahn.twisted.websocket.WampWebSocketServerFactory` (*factory*, **args*,
***kwargs*)

Twisted-based WAMP-over-WebSocket server protocol factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement `autobahn.wamp.interfaces.ITransportHandler`
- **serializers** (list of objects implementing `autobahn.wamp.interfaces.ISerializer`) – A list of WAMP serializers to use (or None for all available serializers).

protocol

alias of `WampWebSocketServerProtocol`

class `autobahn.twisted.websocket.WampWebSocketClientFactory` (*factory*, **args*,
***kwargs*)

Twisted-based WAMP-over-WebSocket client protocol factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement `autobahn.wamp.interfaces.ITransportHandler`
- **serializer** (object implementing `autobahn.wamp.interfaces.ISerializer`) – The WAMP serializer to use (or None for “best” serializer, chosen as the first serializer available from this list: CBOR, MessagePack, UBJSON, JSON).

protocol

alias of `WampWebSocketClientProtocol`

9.6.4 WAMP-over-RawSocket Protocols and Factories

Classes for WAMP-RawSocket clients and servers using Twisted.

class autobahn.twisted.rawsocket.**WampRawSocketServerProtocol**
Twisted-based WAMP-over-RawSocket server protocol.

Implements:

- *autobahn.wamp.interfaces.ITransport*

get_channel_id (*channel_id_type='tls-unique'*)
Implements *autobahn.wamp.interfaces.ITransport.get_channel_id()*

class autobahn.twisted.rawsocket.**WampRawSocketClientProtocol**
Twisted-based WAMP-over-RawSocket client protocol.

Implements:

- *autobahn.wamp.interfaces.ITransport*

get_channel_id (*channel_id_type='tls-unique'*)
Implements *autobahn.wamp.interfaces.ITransport.get_channel_id()*

class autobahn.twisted.rawsocket.**WampRawSocketServerFactory** (*factory, serializers=None*)
Twisted-based WAMP-over-RawSocket server protocol factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement *autobahn.wamp.interfaces.ITransportHandler*
- **serializers** (list of objects implementing *autobahn.wamp.interfaces.ISerializer*) – A list of WAMP serializers to use (or None for all available serializers).

protocol

alias of *WampRawSocketServerProtocol*

class autobahn.twisted.rawsocket.**WampRawSocketClientFactory** (*factory, serializer=None*)
Twisted-based WAMP-over-RawSocket client protocol factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement *autobahn.wamp.interfaces.ITransportHandler*
- **serializer** (object implementing *autobahn.wamp.interfaces.ISerializer*) – The WAMP serializer to use (or None for “best” serializer, chosen as the first serializer available from this list: CBOR, MessagePack, UBJSON, JSON).

protocol

alias of *WampRawSocketClientProtocol*

9.6.5 WAMP Sessions

Classes for WAMP sessions using Twisted.

class autobahn.twisted.wamp.**ApplicationSession** (*config=None*)
WAMP application session for Twisted-based applications.

Implements:

- *autobahn.wamp.interfaces.ITransportHandler*

- `autobahn.wamp.interfaces.ISession`

Implements `autobahn.wamp.interfaces.ISession()`

```
class autobahn.twisted.wamp.ApplicationRunner(url, realm=None, extra=None, serial-  
izers=None, ssl=None, proxy=None,  
headers=None, max_retries=None,  
initial_retry_delay=None,  
max_retry_delay=None,  
retry_delay_growth=None,  
retry_delay_jitter=None)
```

This class is a convenience tool mainly for development and quick hosting of WAMP application components.

It can host a WAMP application component in a WAMP-over-WebSocket client connecting to a WAMP router.

Parameters

- **url** (*str*) – The WebSocket URL of the WAMP router to connect to (e.g. `ws://somehost.com:8090/somepath`)
- **realm** (*str*) – The WAMP realm to join the application session to.
- **extra** (*dict*) – Optional extra configuration to forward to the application component.
- **serializers** (*list*) – A list of WAMP serializers to use (or `None` for default serializers). Serializers must implement `autobahn.wamp.interfaces.ISerializer`.
- **ssl** (`twisted.internet.ssl.CertificateOptions`) – (Optional). If specified this should be an instance suitable to pass as `sslContextFactory` to `twisted.internet.endpoints.SSL4ClientEndpoint` such as `twisted.internet.ssl.CertificateOptions`. Leaving it as `None` will use the result of calling Twisted's `twisted.internet.ssl.platformTrust()` which tries to use your distribution's CA certificates.
- **proxy** (*dict or None*) – Explicit proxy server to use; a dict with `host` and `port` keys
- **headers** (*dict*) – Additional headers to send (only applies to WAMP-over-WebSocket).
- **max_retries** (*int*) – Maximum number of reconnection attempts. Unlimited if set to `-1`.
- **initial_retry_delay** (*float*) – Initial delay for reconnection attempt in seconds (Default: 1.0s).
- **max_retry_delay** (*float*) – Maximum delay for reconnection attempts in seconds (Default: 60s).
- **retry_delay_growth** (*float*) – The growth factor applied to the retry delay between reconnection attempts (Default 1.5).
- **retry_delay_jitter** (*float*) – A 0-argument callable that introduces noise into the delay. (Default `random.random`)

```
run(make, start_reactor=True, auto_reconnect=False, log_level='info', endpoint=None, reactor=None)
```

Run the application component.

Parameters

- **make** (*callable*) – A factory that produces instances of `autobahn.twisted.wamp.ApplicationSession` when called with an instance of `autobahn.wamp.types.ComponentConfig`.

- **start_reactor** – When `True` (the default) this method starts the Twisted reactor and doesn't return until the reactor stops. If there are any problems starting the reactor or connect()-ing, we stop the reactor and raise the exception back to the caller.

Returns `None` is returned, unless you specify `start_reactor=False` in which case the `Deferred` that `connect()` returns is returned; this will call `callback()` with an `IProtocol` instance, which will actually be an instance of `WampWebSocketClientProtocol`

stop()

Stop reconnecting, if auto-reconnecting was enabled.

9.7 Module `autobahn.asyncio`

Autobahn asyncio specific classes. These are used when asyncio is run as the underlying networking framework.

9.7.1 Component

The component API provides a high-level functional style method of defining and running WAMP components including authentication configuration

```
class autobahn.asyncio.component.Component (main=None, transports=None, config=None,
                                             realm=u'realm1', extra=None, authentication=None,
                                             session_factory=None, is_fatal=None)
```

A component establishes a transport and attached a session to a realm using the transport for communication.

The transports a component tries to use can be configured, as well as the auto-reconnect strategy.

Parameters

- **main** (*callable taking 2 args: reactor, ISession*) – After a transport has been connected and a session has been established and joined to a realm, this (async) procedure will be run until it finishes – which signals that the component has run to completion. In this case, it usually doesn't make sense to use the `on_*` kwargs. If you do not pass a `main()` procedure, the session will not be closed (unless you arrange for `.leave()` to be called).
- **transports** (*None or unicode or list of dicts*) – Transport configurations for creating transports. Each transport can be a WAMP URL, or a dict containing the following configuration keys:
 - `type` (optional): `websocket` (default) or `rawsocket`
 - `url`: the router URL
 - **endpoint** (optional, derived from URL if not provided):
 - * `type`: “tcp” or “unix”
 - * `host, port`: only for TCP
 - * `path`: only for unix
 - * `timeout`: in seconds
 - * `tls`: `True` or (under Twisted) an `twisted.internet.ssl.IOpenSSLClientComponentCreator` instance (such as returned from `twisted.internet.ssl.optionsForClientTLS`) or `CertificateOptions` instance.

- **realm** (*unicode*) – the realm to join
- **authentication** (*dict mapping auth_type to dict*) – configuration of authenticators
- **session_factory** (*callable*) – if `None`, `ApplicationSession` is used, otherwise a callable taking a single `config` argument that is used to create a new `ApplicationSession` instance.
- **is_fatal** (*callable taking one arg, or None*) – a callable taking a single argument, an `Exception` instance. The callable should return `True` if this error is “fatal”, meaning we should not try connecting to the current transport again. The default behavior (on `None`) is to always return `False`

session_factory

alias of `autobahn.asyncio.wamp.Session`

start (*loop=None*)

This starts the Component, which means it will start connecting (and re-connecting) to its configured transports. A Component runs until it is “done”, which means one of: - There was a “main” function defined, and it completed successfully; - Something called `.leave()` on our session, and we left successfully; - `.stop()` was called, and completed successfully; - none of our transports were able to connect successfully (failure); :returns: a Future which will resolve (to `None`) when we are

“done” or with an error if something went wrong.

`autobahn.asyncio.component.run(components, log_level='info')`

High-level API to run a series of components.

This will only return once all the components have stopped (including, possibly, after all re-connections have failed if you have re-connections enabled). Under the hood, this calls

XXX fixme for asyncio

– if you wish to manage the loop yourself, use the `autobahn.asyncio.component.Component.start()` method to start each component yourself.

Parameters

- **components** (*Component or list of Components*) – the Component(s) you wish to run
- **log_level** (*string*) – a valid log-level (or `None` to avoid calling `start_logging`)

9.7.2 WebSocket Protocols and Factories

Classes for WebSocket clients and servers using asyncio.

class `autobahn.asyncio.websocket.WebSocketServerProtocol`

Base class for asyncio-based WebSocket server protocols.

Implements:

- `autobahn.websocket.interfaces.IWebSocketChannel`

get_channel_id (*channel_id_type=u'tls-unique'*)

Implements `autobahn.wamp.interfaces.ITransport.get_channel_id()`

class `autobahn.asyncio.websocket.WebSocketClientProtocol`

Base class for asyncio-based WebSocket client protocols.

Implements:

- `autobahn.websocket.interfaces.IWebSocketChannel`

get_channel_id (*channel_id_type='u'tls-unique'*)

Implements `autobahn.wamp.interfaces.ITransport.get_channel_id()`

class `autobahn.asyncio.websocket.WebSocketServerFactory` (**args, **kwargs*)

Base class for asyncio-based WebSocket server factories.

Implements:

- `autobahn.websocket.interfaces.IWebSocketServerChannelFactory`

Note: In addition to all arguments to the constructor of `autobahn.websocket.interfaces.IWebSocketServerChannelFactory()`, you can supply a `loop` keyword argument to specify the asyncio event loop to be used.

protocol

alias of `WebSocketServerProtocol`

class `autobahn.asyncio.websocket.WebSocketClientFactory` (**args, **kwargs*)

Base class for asyncio-based WebSocket client factories.

Implements:

- `autobahn.websocket.interfaces.IWebSocketClientChannelFactory`

Note: In addition to all arguments to the constructor of `autobahn.websocket.interfaces.IWebSocketClientChannelFactory()`, you can supply a `loop` keyword argument to specify the asyncio event loop to be used.

9.7.3 WAMP-over-WebSocket Protocols and Factories

Classes for WAMP-WebSocket clients and servers using asyncio.

class `autobahn.asyncio.websocket.WampWebSocketServerProtocol`

asyncio-based WAMP-over-WebSocket server protocol.

Implements:

- `autobahn.wamp.interfaces.ITransport`

class `autobahn.asyncio.websocket.WampWebSocketClientProtocol`

asyncio-based WAMP-over-WebSocket client protocols.

Implements:

- `autobahn.wamp.interfaces.ITransport`

class `autobahn.asyncio.websocket.WampWebSocketServerFactory` (*factory, *args,*

***kwargs*)

asyncio-based WAMP-over-WebSocket server factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement `autobahn.wamp.interfaces.ITransportHandler`

- **serializers** (list of objects implementing *autobahn.wamp.interfaces.ISerializer*) – A list of WAMP serializers to use (or None for all available serializers).

protocol

alias of *WampWebSocketServerProtocol*

class `autobahn.asyncio.websocket.WampWebSocketClientFactory` (*factory*, **args*, ***kwargs*)

asyncio-based WAMP-over-WebSocket client factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement *autobahn.wamp.interfaces.ITransportHandler*
- **serializer** (object implementing *autobahn.wamp.interfaces.ISerializer*) – The WAMP serializer to use (or None for “best” serializer, chosen as the first serializer available from this list: CBOR, MessagePack, UBJSON, JSON).

protocol

alias of *WampWebSocketClientProtocol*

9.7.4 WAMP-over-RawSocket Protocols and Factories

Classes for WAMP-RawSocket clients and servers using asyncio.

class `autobahn.asyncio.rawsocket.WampRawSocketServerProtocol`
 asyncio-based WAMP-over-RawSocket server protocol.

Implements:

- *autobahn.wamp.interfaces.ITransport*

get_channel_id (*channel_id_type=u'tls-unique'*)

Implements *autobahn.wamp.interfaces.ITransport.get_channel_id()*

class `autobahn.asyncio.rawsocket.WampRawSocketClientProtocol`
 asyncio-based WAMP-over-RawSocket client protocol.

Implements:

- *autobahn.wamp.interfaces.ITransport*

get_channel_id (*channel_id_type=u'tls-unique'*)

Implements *autobahn.wamp.interfaces.ITransport.get_channel_id()*

class `autobahn.asyncio.rawsocket.WampRawSocketServerFactory` (*factory*, *serializers=None*)

asyncio-based WAMP-over-RawSocket server protocol factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement *autobahn.wamp.interfaces.ITransportHandler*
- **serializers** (list of objects implementing *autobahn.wamp.interfaces.ISerializer*) – A list of WAMP serializers to use (or None for all available serializers).

protocol

alias of *WampRawSocketServerProtocol*

class `autobahn.asyncio.rawsocket.WampRawSocketClientFactory` (*factory*, *serializer=None*)
 asyncio-based WAMP-over-RawSocket client factory.

Parameters

- **factory** (*callable*) – A callable that produces instances that implement `autobahn.wamp.interfaces.ITransportHandler`
- **serializer** (object implementing `autobahn.wamp.interfaces.ISerializer`) – The WAMP serializer to use (or `None` for “best” serializer, chosen as the first serializer available from this list: CBOR, MessagePack, UBJSON, JSON).

protocol

alias of `WampRawSocketClientProtocol`

9.7.5 WAMP Sessions

Classes for WAMP sessions using asyncio.

class `autobahn.asyncio.wamp.ApplicationSession` (*config=None*)
 WAMP application session for asyncio-based applications.

Implements:

- `autobahn.wamp.interfaces.ITransportHandler`
- `autobahn.wamp.interfaces.ISession`

Implements `autobahn.wamp.interfaces.ISession()`

class `autobahn.asyncio.wamp.ApplicationRunner` (*url*, *realm=None*, *extra=None*, *serializers=None*, *ssl=None*, *proxy=None*, *headers=None*)

This class is a convenience tool mainly for development and quick hosting of WAMP application components.

It can host a WAMP application component in a WAMP-over-WebSocket client connecting to a WAMP router.

Parameters

- **url** (*str*) – The WebSocket URL of the WAMP router to connect to (e.g. `ws://somehost.com:8090/somepath`)
- **realm** (*str*) – The WAMP realm to join the application session to.
- **extra** (*dict*) – Optional extra configuration to forward to the application component.
- **serializers** (*list*) – A list of WAMP serializers to use (or `None` for default serializers). Serializers must implement `autobahn.wamp.interfaces.ISerializer`.
- **ssl** (*ssl.SSLContext* or *bool*) – An (optional) SSL context instance or a *bool*. See the documentation for the `loop.create_connection` asyncio method, to which this value is passed as the `ssl` keyword parameter.
- **proxy** (*dict* or *None*) – Explicit proxy server to use; a dict with `host` and `port` keys
- **headers** (*dict*) – Additional headers to send (only applies to WAMP-over-WebSocket).

run (*make*, *start_loop=True*, *log_level='info'*)

Run the application component. Under the hood, this runs the event loop (unless `start_loop=False` is passed) so won't return until the program is done.

Parameters

- **make** (*callable*) – A factory that produces instances of `autobahn.asyncio.wamp.ApplicationSession` when called with an instance of `autobahn.wamp.types.ComponentConfig`.
- **start_loop** (*bool*) – When `True` (the default) this method start a new asyncio loop.

Returns `None` is returned, unless you specify `start_loop=False` in which case the coroutine from calling `loop.create_connection()` is returned. This will yield the (transport, protocol) pair.

stop ()

Stop reconnecting, if auto-reconnecting was enabled.

10.1 19.9.3

- new: XBR - update XBR for new contract ABIs
- new: XBR - payment channel close
- new: XBR - implement EIP712 signing of messages in endpoints

10.2 19.9.2

- new: XBR - update XBR for new contract ABIs

10.3 19.9.1

- new: XBR - update XBR for new contract ABIs

10.4 19.8.1

- new: implement XBR off-chain delegate transaction signing and verification (#1202)
- new: update XBR for new contract ABIs

10.5 19.7.2

- fix: monkey patch re-add removed helper functions removed in eth-abi
- new: simple blockchain (XBR) client

- new: update XBR ABI files
- new: XBR endpoint transaction signing
- new: client side catching of WAMP URI errors in `session.call|register|publish|subscribe`

10.6 19.7.1

- fix: implement client side payload exceed max size; improve max size exceeded handling
- fix: detect when our transport is “already” closed at connect time (#1215)
- fix: XBR examples

10.7 19.6.2

- fix: add forgotten cryptography dependency (#1205)

10.8 19.6.1

- new: XBR client library integrated (#1201)
- new: add entropy depletion unit tests
- fix: make CLI tool python2 compatible (#1197)
- fix: use cryptography pbkdf2 instead of custom (#1198)
- fix: include tests for packaging (#1194)

10.9 19.5.1

- fix: authextra merging (#1191)
- fix: set default `retry_delay_jitter` (#1190)
- new: add rawsocket + twisted example (#1189)
- new: WebSocket testing support, via Agent-style interface (#1186)
- new: decorator for `on_connectfailure`
- fix: delayed call leakage (#1152)
- new: CLI client (#1150)
- fix: set up TLS over proxy properly (#1149)
- new: expose ser modules (#1148)
- fix: base64 encodings, add hex encoding (#1146)
- new: `onConnecting` callback (with `TransportDetails` and `ConnectingRequest`). **Note:** if you’ve implemented a pure `IWebSocketChannel` without inheriting from Autobahn base classes, you’ll need to add an `onConnecting()` method that just does *return None*.

10.10 19.3.3

- fix: RegisterOptions should have detailsbool parameter (#1143)
- new: WAMP callee disclosure
- new: WAMP forward_for in more message types; expose forward_for in options/details types
- new: expose underlying serializer modules on WAMP object serializers
- fix: WAMP-cryptosign fix base64 encodings, add hex encoding (#1146)

10.11 19.3.2

- fix: import guards for flatbuffers (missed in CI as we run with “all deps installed” there)

10.12 19.3.1

- new: add experimental support for WAMP-FlatBuffers serializer: EVENT and PUBLISH messages for now only
- new: add FlatBuffers schema for WAMP messages
- fix: improve serializer package preference behavior depending on CPy vs PyPy
- fix: relax protocol violations: ignore unknown INTERRUPT and GOODBYE already sent; reduce log noise
- fix: skipping Yield message if transport gets closed before success callback is called (#1119)
- fix: integer division in logging in py3 (#1120)
- fix: Await tasks after they’ve been cancelled in *autobahn.asyncio.component.nicely_exit* (#1116)

10.13 19.2.1

- fix: set announced roles on appsession object (#1109)
- new: lower log noise on ApplicationErrors (#1107)
- new: allow explicit passing of tx endpoint and reactor (#1103)
- new: add attribute to forward applicationrunner to applicationssession via componentconfig

10.14 19.1.1

- new: adding marshal on SessionDetails

10.15 18.12.1

- fix: return the wrapped function from component decorators (#1093)
- new: add proxy= support for Component transports (#1091)
- fix: Ticket1077 stop start (#1090)
- fix: cleanup cancel handling (#1087)

10.16 18.11.2

- fix: asyncio unregisterProducer raises exception (#1079)
- fix: URL is not required in RawSocket configuration items with WAMP component API
- fix: revert PR <https://github.com/crossbario/autobahn-python/pull/1075>

10.17 18.11.1

- new: forward_for WAMP message attribute (for Crossbar.io Router-to-Router federation)
- new: support RawSocket URLs (eg “rs://localhost:5000” or “rs://unix:/tmp/file.sock”)
- new: support WAMP-over-Unix sockets for WAMP components (“new API”)
- fix: use same WAMP serializer construction code for WAMP components (“new API”) and ApplicationSession/Runner
- fix: memory leak with Twisted/WebSocket, dropConnection and producer

10.18 18.10.1

- Don’t eat Component.stop() request when crossbar not connected (#1066)
- handle async on_progress callbacks properly (#1061)
- fix attribute error when ConnectionResetError does not contain “reason” attribute (#1059)
- infer rawsocket host, port from URL (#1056)
- fix error on connection lost if no reason (reason = None) (#1055)
- fixed typo on class name (#1054)

10.19 18.9.2

- fix: TLS error logging (#1052)

10.20 18.9.1

- new: Interrupt has Options.reason to signal detailed origin of call cancelation (active cancel vs passive timeout)
- fix: Cancel and Interrupt gets "killnowait" mode
- new: Cancel and Interrupt no longer have ABORT/"abort"

10.21 18.8.2

- new: WAMP call cancel support
- fix: getting started documentation and general docs improvements
- fix: WebSocket auto-reconnect on opening handshake failure
- fix: more Python 3.7 compatibility and CI
- fix: Docker image building using multi-arch, size optimizations and more
- fix: asyncio failed to re-connect under some circumstances (#1040, #1041, #1010, #1030)

10.22 18.8.1

- fix: Python 3.7 compatibility
- fix: remove Python 2.6 support leftovers
- new: getting started docker-based examples in matching with docs

10.23 18.7.1

- new: Python 3.7 supported and integrated into CI
- new: WAMP-SCRAM examples
- fix: glitches in WAMP-SCRAM

10.24 18.6.1

- fix: implement abort argument for asyncio in WebSocketAdapterProtocol._closeConnection (#1012)

10.25 18.5.2

- fix: security (DoS amplification): a WebSocket server with permessage-deflate turned on could be induced to waste extra memory through a "zip-bomb" style attack. Setting a max-message-size will now stop deflating compressed data when the max is reached (instead of consuming all compressed data first). This could be used by a malicious client to make the server waste much more memory than the bandwidth the client uses.

10.26 18.5.1

- fix: asyncio/rawsocket buffer processing
- fix: example failures due to pypy longer startup time (#996)
- fix: add on_welcome for AuthWampCra (#992)
- fix: make run() of multiple components work on Windows (#986)
- new: *max_retries* now defaults to -1 (“try forever”)

10.27 18.4.1

- new: WAMP-SCRAM authentication
- new: native vector extensions (NVX)
- fix: improve choosereactor (#965, #963)
- new: lots of new and improved documentation, component API and more
- new: Docker image tooling now in this repo
- fix: “fatal errors” in Component (#977)
- fix: AIO/Component: create a new loop if already closed
- fix: kwarg keys sometimes are bytes on Python2 (#980)
- fix: various improvements to new component API

10.28 18.3.1

- fix: endpoint configuration error messages (#942)
- fix: various improvements to the new components API (including retries)
- fix: pass *unregisterProducer* through to twisted to complement *WebSocketAdapterProtocol.registerProducer* (#875)

10.29 17.10.1

- fix: proxy support (#918)
- fix: ensure that a future is not done before rejecting it (#919)
- fix: don't try to reject cancelled futures within pending requests when closing the session

10.30 17.9.3

Published 2017-09-23

- new: user configurable backoff policy
- fix: close aio loop on exit

- fix: some component API cleanups
- fix: cryptosign on py2
- new: allow setting correlation_is_last message marker in WAMP messages from user code

10.31 17.9.2

Published 2017-09-12

- new: allow setting correlation URI and anchor flag in WAMP messages from user code
- fix: WebSocket proxy connect on Python 3 (unicode vs bytes bug)

10.32 17.9.1

Published 2017-09-04

- new: allow setting correlation ID in WAMP messages from user code
- fix: distribute LICENSE file in all distribution formats (using setup.cfg metadata)

10.33 17.8.1

Published 2017-08-15

- new: prefix= kwarg now available on ApplicationSession.register for runtime method names
- new: @wamp.register(None) will use the function-name as the URI
- new: correlation and uri attributes for WAMP message tracing

10.34 17.7.1

Published 2017-07-21

- new: lots of improvements of components API, including asyncio support

10.35 17.6.2

Published 2017-06-24

- new: force register option when joining realms
- fix: TLS options in components API

10.36 17.6.1

Published 2017-06-07

- new: allow components to pass WebSocket/RawSocket options
- fix: register/subscribe decorators support different URI syntax from what session.register and session.subscribe support
- new: allow for standard Crossbar a.c..d style pattern URIs to be used with Pattern
- new: dynamic authorizer example
- new: configurable log level in *ApplicationRunner.run* for asyncio
- fix: forward reason of hard dropping WebSocket connection in *wasNotCleanReason*

10.37 17.5.1

Published 2017-05-01

- new: switched to calendar-based release/version numbering
- new: WAMP event retention example and docs
- new: WAMP subscribe/register options on WAMP decorators
- fix: require all TLS dependencies on extra_require_encryption setuptools
- new: support for X-Forwarded-For HTTP header
- fix: ABC interface definitions where missing “self”

10.38 0.18.2

Published 2017-04-14

- new: payload codec API
- fix: make WAMP-cryptobox use new payload codec API
- fix: automatic binary conversation for JSON
- new: improvements to experimental component API

10.39 0.18.1

Published 2017-03-28

- fix: errback all user handlers for all WAMP requests still outstanding when session/transport is closed/lost
- fix: allow WebSocketServerProtocol.onConnect to return a Future/Deferred
- new: allow configuration of RawSocket serializer
- new: test all examples on both WebSocket and RawSocket
- fix: revert to default arg for Deny reason

- new: WAMP-RawSocket and WebSocket default settings for asyncio
- new: experimental component based API and new WAMP Session class

10.40 0.18.0

Published 2017-03-26

- fix: big docs cleanup and polish
- fix: docs for publisher black-/whitelisting based on authid/authrole
- fix: serialization for publisher black-/whitelisting based on authid/authrole
- new: allow to stop auto-reconnecting for Twisted ApplicationRunner
- fix: allow empty realms (router decides) for asyncio ApplicationRunner

10.41 0.17.2

Published 2017-02-25

- new: WAMP-cryptosign elliptic curve based authentication support for asyncio
- new: CI testing on Twisted 17.1
- new: controller/shared attributes on ComponentConfig

10.42 0.17.1

Published 2016-12-29

- new: demo MQTT and WAMP clients interoperating via Crossbar.io
- new: WAMP message attributes for message resumption
- new: improvements to experimental WAMP components API
- fix: Python 3.4.4+ when using asyncio

10.43 0.17.0

Published 2016-11-30

- new: WAMP PubSub event retention
- new: WAMP PubSub last will / testament
- new: WAMP PubSub acknowledged delivery
- fix: WAMP Session lifecycle - properly handle asynchronous *ApplicationSession.onConnect* for asyncio

10.44 0.16.1

Published 2016-11-07

- fix: inconsistency between *PublishOptions* and *Publish* message
- new: improve logging with dropped connections (eg due to timeouts)
- fix: various smaller asyncio fixes
- new: rewrite all examples for new Python 3.5 `async/await` syntax
- fix: copyrights transferred from Tavendo GmbH to Crossbar.io Technologies GmbH

10.45 0.16.0

Published 2016-08-14

- new: new *autobahn.wamp.component* API in experimental stage
- new: Ed25519 OpenSSH and OpenBSD signify key support
- fix: allow Py2 and async user code in *onConnect* callback of asyncio

10.46 0.15.0

Published 2016-07-19

- new: WAMP AP option: register with maximum concurrency
- new: automatic reconnect for WAMP clients *ApplicationRunner* on Twisted
- new: RawSocket support in WAMP clients using *ApplicationRunner* on Twisted
- new: Set WebSocket production settings on WAMP clients using *ApplicationRunner* on Twisted
- fix: #715 Py2/Py3 issue with WebSocket traffic logging
- new: allow WAMP factories to take classes OR instances of *ApplicationSession*
- fix: make *WebSocketResource* working on Twisted 16.3
- fix: remove some minified AutobahnJS from examples (makes distro packagers happy)
- new: WAMP-RawSocket transport for asyncio
- fix: #691 (**security**) If the *allowedOrigins* websocket option was set, the resulting matching was insufficient and would allow more origins than intended

10.47 0.14.1

Published 2016-05-26

- fix: unpinned Twisted version again
- fix: remove X-Powered-By header
- fix: removed deprecated args to *ApplicationRunner*

10.48 0.14.0

Published 2016-05-01

- new: use of batched/chunked timers to massively reduce CPU load with WebSocket auto-ping/pong
- new: support new UBJSON WAMP serialization format
- new: publish universal wheels
- fix: replaced *msgpack-python* with *u-msgpack-python*
- fix: some glitches with *eligible / exclude* when used with *authid / authrole*
- fix: some logging glitches
- fix: pin Twisted at 16.1.1 (for now)

10.49 0.13.1

Published 2016-04-09

- moved helper funs for WebSocket URL handling to `autobahn.websocket.util`
- fix: marshal WAMP options only when needed
- fix: various smallish examples fixes

10.50 0.13.0

Published 2016-03-15

- fix: better traceback logging (#613)
- fix: unicode handling in debug messages (#606)
- fix: return Deferred from `run()` (#603).
- fix: more debug logging improvements
- fix: more *Pattern* tests, fix edge case (#592).
- fix: better logging from `asyncio ApplicationRunner`
- new: `disclose` becomes a strict router-side feature (#586).
- new: subscriber black/whitelisting using `authid/authrole`
- new: `asyncio websocket testee`
- new: refine Observable API (#593).

10.51 0.12.1

Published 2016-01-30

- new: support CBOR serialization in WAMP
- new: support WAMP payload transparency

- new: beta version of WAMP-cryptosign authentication method
- new: alpha version of WAMP-cryptobox end-to-end encryption
- new: support user provided authextra data in WAMP authentication
- new: support WAMP channel binding
- new: WAMP authentication util functions for TOTP
- fix: support skewed time leniency for TOTP
- fix: use the new logging system in WAMP implementation
- fix: some remaining Python 3 issues
- fix: allow WAMP prefix matching register/subscribe with dot at end of URI

10.52 0.11.0

Published 2015-12-09

10.53 0.10.9

Published 2015-09-15

- fixes regression #500 introduced with commit 9f68749

10.54 0.10.8

Published 2015-09-13

- maintenance release with some issues fixed

10.55 0.10.7

Published 2015-09-06

- fixes a regression in 0.10.6

10.56 0.10.6

Published 2015-09-05

- maintenance release with nearly two dozen fixes
- improved Python 3, error logging, WAMP connection mgmt, ..

10.57 0.10.5

Published 2015-08-06

- maintenance release with lots of smaller bug fixes

10.58 0.10.4

Published 2015-05-08

- maintenance release with some smaller bug fixes

10.59 0.10.3

Published 2015-04-14

- new: using txaiio package
- new: revised WAMP-over-RawSocket specification implemented
- fix: ignore unknown attributes in WAMP Options/Details

10.60 0.10.2

Published 2015-03-19

- fix: Twisted 11 lacks IPv6 address class
- new: various improvements handling errors from user code
- new: add parameter to limit max connections on WebSocket servers
- new: use new-style classes everywhere
- new: moved package content to repo root
- new: implement router revocation signaling for registrations/subscriptions
- new: a whole bunch of more unit tests / coverage
- new: provide reason/message when transport is lost
- fix: send WAMP errors upon serialization errors

10.61 0.10.1

Published 2015-03-01

- support for pattern-based subscriptions and registrations
- support for shared registrations
- fix: HEARTBEAT removed

10.62 0.10.0

Published 2015-02-19

- Change license from Apache 2.0 to MIT
- fix file line endings
- add setuptools test target
- fix Python 2.6

10.63 0.9.6

Published 2015-02-13

- PEP8 code conformance
- PyFlakes code quality
- fix: warning for xrange on Python 3
- fix: parsing of IPv6 host headers
- add WAMP/Twisted service
- fix: handle connect error in ApplicationRunner (on Twisted)

10.64 0.9.5

Published 2015-01-11

- do not try to fire onClose on a session that never existed in the first place (fixes #316)
- various doc fixes
- fix URI decorator component handling (PR #309)
- fix “standalone” argument to ApplicationRunner

10.65 0.9.4

Published 2014-12-15

- refactor router code to Crossbar.io
- fix: catch error when Nagle cannot be set on stream transport (UDS)
- fix: spelling in doc strings / docs
- fix: WAMP JSON serialization of Unicode for ujson
- fix: Twisted plugins issue

10.66 0.9.3-2

Published 2014-11-15

- maintenance release with some smaller bug fixes
- use ujson for WAMP when available
- reduce WAMP ID space to $[0, 2^{31}-1]$
- deactivate Twisted plugin cache recaching in *setup.py*

10.67 0.9.3

Published 2014-11-10

- feature: WebSocket origin checking
- feature: allow to disclose caller transport level info
- fix: Python 2.6 compatibility
- fix: handling of WebSocket close frame in a corner-case

10.68 0.9.2

Published 2014-10-17

- fix: permessage-deflate “client_max_window_bits” parameter handling
- fix: cancel opening handshake timeouts also for WebSocket clients
- feature: add more control parameters to Flash policy file factory
- feature: update AutobahnJS in examples
- feature: allow to set WebSocket HTTP headers via dict
- fix: ayncio imports for Python 3.4.2
- feature: added reconnecting WebSocket client example

10.69 0.9.1

Published 2014-09-22

- maintenance release with some smaller bug fixes

10.70 0.9.0

Published 2014-09-02

- all WAMP v1 code removed
- migrated various WAMP examples to WAMP v2

- improved unicode/bytes handling
- lots of code quality polishment
- more unit test coverage

10.71 0.8.15

Published 2014-08-23

- docs polishing
- small fixes (unicode handling and such)

10.72 0.8.14

Published 2014-08-14

- add automatic WebSocket ping/pong (#24)
- WAMP-CRA client side (beta!)

10.73 0.8.13

Published 2014-08-05

- fix Application class (#240)
- support WSS for Application class
- remove implicit dependency on bzip2 (#244)

10.74 0.8.12

Published 2014-07-23

- WAMP application payload validation hooks
- added Tox based testing for multiple platforms
- code quality fixes

10.75 0.8.11

Published

- hooks and infrastructure for WAMP2 authorization
- new examples: Twisted Klein, Crochet, wxPython
- improved WAMP long-poll transport
- improved stats tracker

10.76 0.8.10

Published

- WAMP-over-Long-poll (preliminary)
- WAMP Authentication methods CR, Ticket, TOTP (preliminary)
- WAMP App object (preliminary)
- various fixes

10.77 0.8.9

Published

- maintenance release

10.78 0.8.8

Published

- initial support for WAMP on asyncio
- new WAMP examples
- WAMP ApplicationRunner

10.79 0.8.7

Published

- maintenance release

10.80 0.8.6

Published

- started reworking docs
- allow factories to operate without WS URL
- fix behavior on second protocol violation

10.81 0.8.5

Published

- support WAMP endpoint/handler decorators
- new examples for endpoint/handler decorators
- fix excludeMe pubsub option

10.82 0.8.4

Published

- initial support for WAMP v2 authentication
- various fixes/improvements to WAMP v2 implementation
- new example: WebSocket authentication with Mozilla Persona
- polish up documentation

10.83 0.8.3

Published

- fix bug with closing router app sessions

10.84 0.8.2

Published

- compatibility with latest WAMP v2 spec (“RC-2, 2014/02/22”)
- various smaller fixes

10.85 0.8.1

Published

- WAMP v2 basic router (broker + dealer) implementation
- WAMP v2 example set
- WAMP v2: decouple transports, sessions and routers
- support explicit (binary) subprotocol name for wrapping WebSocket factory
- fix dependency on MsgPack

10.86 0.8.0

Published

- new: complete WAMP v2 protocol implementation and API layer
- new: basic WAMP v2 router implementation
- existing WAMP v1 implementation renamed

10.87 0.7.4

Published

- fix WebSocket server HTML status page
- fix close reason string handling
- new “slowsquare” example
- Python 2.6 fixes

10.88 0.7.3

Published

- support asyncio on Python 2 (via “Trollius” backport)

10.89 0.7.2

Published

- really fix setup/packaging

10.90 0.7.1

Published

- setup fixes
- fixes for Python2.6

10.91 0.7.0

Published

- asyncio support
- Python 3 support
- support WebSocket (and WAMP) over Twisted stream endpoints
- support Twisted stream endpoints over WebSocket
- twistd stream endpoint forwarding plugin
- various new examples
- fix Flash policy factory

10.92 0.6.5

Published

- Twisted reactor is no longer imported on module level (but lazy)
- optimize pure Python UTF8 validator (10-20% speedup on PyPy)
- opening handshake traffic stats (per-open stats)
- add multi-core echo example
- fixes with examples of streaming mode
- fix zero payload in streaming mode

10.93 0.6.4

Published

- support latest *permessage-deflate* draft
- allow controlling memory level for *zlib* / *permessage-deflate*
- updated reference, moved docs to “Read the Docs”
- fixes #157 (a WAMP-CRA timing attack very, very unlikely to be exploitable, but anyway)

10.94 0.6.3

Published

- symmetric RPCs
- WebSocket compression: client and server, *permessage-deflate*, *permessage-bzip2* and *permessage-snappy*
- *onConnect* is allowed to return Deferreds now
- custom publication and subscription handler are allowed to return Deferreds now
- support for explicit proxies
- default protocol version now is RFC6455
- option to use salted passwords for authentication with WAMP-CRA
- automatically use *ultrajson* acceleration package for JSON processing when available
- automatically use *wsaccel* acceleration package for WebSocket masking and UTF8 validation when available
- allow setting and getting of custom HTTP headers in WebSocket opening handshake
- various new code examples
- various documentation fixes and improvements

10.95 0.5.14

Published

- base version when we started to maintain a changelog

a

- `autobahn.rawsocket.util`, 79
- `autobahn.util`, 61
- `autobahn.wamp.auth`, 96
- `autobahn.wamp.cryptobox`, 97
- `autobahn.wamp.cryptosign`, 97
- `autobahn.wamp.exception`, 94
- `autobahn.wamp.interfaces`, 80
- `autobahn.wamp.types`, 87
- `autobahn.websocket.compress`, 75
- `autobahn.websocket.types`, 72
- `autobahn.websocket.util`, 78

A

`abort()` (*autobahn.wamp.interfaces.ITransport method*), 82
`absolute()` (*autobahn.util.Tracker method*), 63
`Accept` (*class in autobahn.wamp.types*), 88
`ApplicationError`, 94
`ApplicationRunner` (*class in autobahn.asyncio.wamp*), 109
`ApplicationRunner` (*class in autobahn.twisted.wamp*), 104
`ApplicationSession` (*class in autobahn.asyncio.wamp*), 109
`ApplicationSession` (*class in autobahn.twisted.wamp*), 103
`AUTHENTICATION_FAILED` (*autobahn.wamp.exception.ApplicationError attribute*), 94
`AUTHORIZATION_FAILED` (*autobahn.wamp.exception.ApplicationError attribute*), 94
`AuthScram` (*class in autobahn.wamp.auth*), 96
`autobahn.rawsocket.util` (*module*), 79
`autobahn.util` (*module*), 61
`autobahn.wamp.auth` (*module*), 96
`autobahn.wamp.cryptobox` (*module*), 97
`autobahn.wamp.cryptosign` (*module*), 97
`autobahn.wamp.exception` (*module*), 94
`autobahn.wamp.interfaces` (*module*), 80
`autobahn.wamp.types` (*module*), 87
`autobahn.websocket.compress` (*module*), 75
`autobahn.websocket.types` (*module*), 72
`autobahn.websocket.util` (*module*), 78

B

`BAD_REQUEST` (*autobahn.websocket.types.ConnectionDeny attribute*), 73
`BINARY` (*autobahn.wamp.interfaces.IObjectSerializer attribute*), 80

C

`call()` (*autobahn.wamp.interfaces.ISession method*), 83
`CallDetails` (*class in autobahn.wamp.types*), 92
`CallOptions` (*class in autobahn.wamp.types*), 93
`CallResult` (*class in autobahn.wamp.types*), 93
`CANCELED` (*autobahn.wamp.exception.ApplicationError attribute*), 94
`Challenge` (*class in autobahn.wamp.types*), 88
`close()` (*autobahn.wamp.interfaces.ITransport method*), 82
`CLOSE_REALM` (*autobahn.wamp.exception.ApplicationError attribute*), 94
`CloseDetails` (*class in autobahn.wamp.types*), 90
`Component` (*class in autobahn.asyncio.component*), 105
`Component` (*class in autobahn.twisted.component*), 100
`Component` (*class in autobahn.wamp.component*), 98
`ComponentConfig` (*class in autobahn.wamp.types*), 87
`compute_totp()` (*in module autobahn.wamp.auth*), 96
`compute_wcs()` (*in module autobahn.wamp.auth*), 97
`ConnectionAccept` (*class in autobahn.websocket.types*), 73
`ConnectionDeny`, 73
`ConnectionRequest` (*class in autobahn.websocket.types*), 72
`ConnectionResponse` (*class in autobahn.websocket.types*), 73
`create_url()` (*in module autobahn.rawsocket.util*), 79
`create_url()` (*in module autobahn.websocket.util*), 78

D

`decode()` (*autobahn.wamp.interfaces.IPayloadCodec method*), 87
`define()` (*autobahn.wamp.interfaces.ISession*

- method*), 83
 - Deny (*class in autobahn.wamp.types*), 88
 - derive_key() (*in module autobahn.wamp.auth*), 97
 - diff() (*autobahn.util.Tracker method*), 64
 - disconnect() (*autobahn.wamp.interfaces.ISession method*), 83
- ## E
- elapsed() (*autobahn.util.Stopwatch method*), 63
 - ENC_DECRYPT_ERROR (*autobahn.wamp.exception.ApplicationError attribute*), 94
 - ENC_NO_PAYLOAD_CODECS (*autobahn.wamp.exception.ApplicationError attribute*), 94
 - ENC_TRUSTED_URI_MISMATCH (*autobahn.wamp.exception.ApplicationError attribute*), 94
 - encode() (*autobahn.wamp.interfaces.IPayloadCodec method*), 87
 - encode_truncate() (*in module autobahn.util*), 61
 - EncodedPayload (*class in autobahn.wamp.cryptobox*), 97
 - EncodedPayload (*class in autobahn.wamp.types*), 93
 - EqualityMixin (*class in autobahn.util*), 64
 - Error, 94
 - error_message() (*autobahn.wamp.exception.ApplicationError method*), 95
 - EventDetails (*class in autobahn.wamp.types*), 91
- ## F
- fire() (*autobahn.util.ObservableMixin method*), 64
 - FORBIDDEN (*autobahn.websocket.types.ConnectionDeny attribute*), 74
 - from_calldetails() (*autobahn.wamp.types.SessionIdent static method*), 90
 - from_eventdetails() (*autobahn.wamp.types.SessionIdent static method*), 90
- ## G
- generate_activation_code() (*in module autobahn.util*), 66
 - generate_serial_number() (*in module autobahn.util*), 66
 - generate_token() (*in module autobahn.util*), 65
 - generate_totp_secret() (*in module autobahn.wamp.auth*), 96
 - generate_user_password() (*in module autobahn.util*), 66
 - generate_wcs() (*in module autobahn.wamp.auth*), 97
- get_channel_id() (*autobahn.asyncio.rawsocket.WampRawSocketClientProtocol method*), 108
 - get_channel_id() (*autobahn.asyncio.rawsocket.WampRawSocketServerProtocol method*), 108
 - get_channel_id() (*autobahn.asyncio.websocket.WebSocketClientProtocol method*), 107
 - get_channel_id() (*autobahn.asyncio.websocket.WebSocketServerProtocol method*), 106
 - get_channel_id() (*autobahn.twisted.rawsocket.WampRawSocketClientProtocol method*), 103
 - get_channel_id() (*autobahn.twisted.rawsocket.WampRawSocketServerProtocol method*), 103
 - get_channel_id() (*autobahn.twisted.websocket.WebSocketClientProtocol method*), 101
 - get_channel_id() (*autobahn.twisted.websocket.WebSocketServerProtocol method*), 101
 - get_channel_id() (*autobahn.wamp.interfaces.ITransport method*), 82
 - get_extension_string() (*autobahn.websocket.compress.PerMessageBzip2Offer method*), 77
 - get_extension_string() (*autobahn.websocket.compress.PerMessageBzip2OfferAccept method*), 78
 - get_extension_string() (*autobahn.websocket.compress.PerMessageDeflateOffer method*), 75
 - get_extension_string() (*autobahn.websocket.compress.PerMessageDeflateOfferAccept method*), 76
 - get_payload_codec() (*autobahn.wamp.interfaces.ISession method*), 83
- GOODBYE_AND_OUT (*autobahn.wamp.exception.ApplicationError attribute*), 94
- ## H
- HelloDetails (*class in autobahn.wamp.types*), 89
 - HelloReturn (*class in autobahn.wamp.types*), 88
- ## I
- id() (*in module autobahn.util*), 62
 - IdGenerator (*class in autobahn.util*), 64
 - IMessage (*class in autobahn.wamp.interfaces*), 81

IncomingMessage (class in autobahn.websocket.types), 74

INTERNAL_SERVER_ERROR (autobahn.websocket.types.ConnectionDeny attribute), 74

INVALID_ARGUMENT (autobahn.wamp.exception.ApplicationError attribute), 94

INVALID_PAYLOAD (autobahn.wamp.exception.ApplicationError attribute), 94

INVALID_URI (autobahn.wamp.exception.ApplicationError attribute), 95

InvalidUri, 96

IObjectSerializer (class in autobahn.wamp.interfaces), 80

IPayloadCodec (class in autobahn.wamp.interfaces), 86

is_attached() (autobahn.wamp.interfaces.ISession method), 84

is_connected() (autobahn.wamp.interfaces.ISession method), 84

ISerializer (class in autobahn.wamp.interfaces), 81

ISession (class in autobahn.wamp.interfaces), 83

isOpen() (autobahn.wamp.interfaces.ITransport method), 82

ITransport (class in autobahn.wamp.interfaces), 81

IWebSocketChannel (class in autobahn.websocket.interfaces), 66

IWebSocketClientChannelFactory (class in autobahn.websocket.interfaces), 70

IWebSocketServerChannelFactory (class in autobahn.websocket.interfaces), 68

J

join() (autobahn.wamp.interfaces.ISession method), 84

L

leave() (autobahn.wamp.interfaces.ISession method), 84

M

Message (class in autobahn.websocket.types), 74

message_attr() (autobahn.wamp.types.CallOptions method), 93

message_attr() (autobahn.wamp.types.PublishOptions method), 92

message_attr() (autobahn.wamp.types.RegisterOptions method), 92

message_attr() (autobahn.wamp.types.SubscribeOptions method), 91

MESSAGE_TYPE (autobahn.wamp.interfaces.IMessage attribute), 81

MESSAGE_TYPE_MAP (autobahn.wamp.interfaces.ISerializer attribute), 81

N

newid() (in module autobahn.util), 62

next() (autobahn.util.IdGenerator method), 65

NO_AUTH_METHOD (autobahn.wamp.exception.ApplicationError attribute), 95

NO_ELIGIBLE_CALLEE (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_PRINCIPAL (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_PROCEDURE (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_REALM (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_REGISTRATION (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_ROLE (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_SESSION (autobahn.wamp.exception.ApplicationError attribute), 95

NO_SUCH_SUBSCRIPTION (autobahn.wamp.exception.ApplicationError attribute), 95

NOT_ACCEPTABLE (autobahn.websocket.types.ConnectionDeny attribute), 74

NOT_AUTHORIZED (autobahn.wamp.exception.ApplicationError attribute), 95

NOT_FOUND (autobahn.websocket.types.ConnectionDeny attribute), 74

NOT_IMPLEMENTED (autobahn.websocket.types.ConnectionDeny attribute), 74

NotAuthorized, 96

O

ObservableMixin (class in autobahn.util), 64

- off () (*autobahn.util.ObservableMixin* method), 64
- on () (*autobahn.util.ObservableMixin* method), 64
- on_connect () (*autobahn.wamp.component.Component* method), 99
- on_connectfailure () (*autobahn.wamp.component.Component* method), 99
- on_disconnect () (*autobahn.wamp.component.Component* method), 99
- on_join () (*autobahn.wamp.component.Component* method), 99
- on_leave () (*autobahn.wamp.component.Component* method), 99
- on_ready () (*autobahn.wamp.component.Component* method), 99
- on_welcome () (*autobahn.wamp.auth.AuthScram* method), 96
- onChallenge () (*autobahn.wamp.interfaces.ISession* method), 84
- onClose () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 66
- onConnect () (*autobahn.wamp.interfaces.ISession* method), 84
- onConnect () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 66
- onConnecting () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 67
- onDisconnect () (*autobahn.wamp.interfaces.ISession* method), 84
- onJoin () (*autobahn.wamp.interfaces.ISession* method), 84
- onLeave () (*autobahn.wamp.interfaces.ISession* method), 84
- onMessage () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 67
- onOpen () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 67
- onPing () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 67
- onPong () (*autobahn.websocket.interfaces.IWebSocketChannel* method), 67
- onUserError () (*autobahn.wamp.interfaces.ISession* method), 84
- onWelcome () (*autobahn.wamp.interfaces.ISession* method), 85
- OutgoingMessage (class in *autobahn.websocket.types*), 74
- parse () (*autobahn.wamp.interfaces.IMessage* static method), 81
- parse () (*autobahn.websocket.compress.PerMessageBzip2Offer* class method), 77
- parse () (*autobahn.websocket.compress.PerMessageBzip2Response* class method), 78
- parse () (*autobahn.websocket.compress.PerMessageDeflateOffer* class method), 75
- parse () (*autobahn.websocket.compress.PerMessageDeflateResponse* class method), 76
- parse_url () (in module *autobahn.rawsocket.util*), 80
- parse_url () (in module *autobahn.websocket.util*), 79
- pause () (*autobahn.util.Stopwatch* method), 63
- PAYLOAD_SIZE_EXCEEDED (*autobahn.wamp.exception.ApplicationError* attribute), 95
- pbkdf2 () (in module *autobahn.wamp.auth*), 96
- PerMessageBzip2 (class in *autobahn.websocket.compress*), 78
- PerMessageBzip2Offer (class in *autobahn.websocket.compress*), 77
- PerMessageBzip2OfferAccept (class in *autobahn.websocket.compress*), 77
- PerMessageBzip2Response (class in *autobahn.websocket.compress*), 78
- PerMessageBzip2ResponseAccept (class in *autobahn.websocket.compress*), 78
- PerMessageCompress (class in *autobahn.websocket.compress*), 75
- PerMessageCompressOffer (class in *autobahn.websocket.compress*), 75
- PerMessageCompressOfferAccept (class in *autobahn.websocket.compress*), 75
- PerMessageCompressResponse (class in *autobahn.websocket.compress*), 75
- PerMessageCompressResponseAccept (class in *autobahn.websocket.compress*), 75
- PerMessageDeflate (class in *autobahn.websocket.compress*), 75
- PerMessageDeflateOffer (class in *autobahn.websocket.compress*), 75
- PerMessageDeflateOfferAccept (class in *autobahn.websocket.compress*), 75
- PerMessageDeflateResponse (class in *autobahn.websocket.compress*), 76
- PerMessageDeflateResponseAccept (class in *autobahn.websocket.compress*), 76
- PROCEDURE_ALREADY_EXISTS (*autobahn.wamp.exception.ApplicationError* attribute), 95
- PROCEDURE_EXISTS_INVOCATION_POLICY_CONFLICT (*autobahn.wamp.exception.ApplicationError* attribute), 95
- protocol (*autobahn.asyncio.rawsocket.WampRawSocketClientFactory* attribute), 109

P

[protocol \(autobahn.asyncio.rawsocket.WampRawSocketServerFactory attribute\), 108](#)
[protocol \(autobahn.asyncio.rawsocket.WampRawSocketClientFactory attribute\), 108](#)
[protocol \(autobahn.asyncio.websocket.WampWebSocketClientFactory attribute\), 108](#)
[protocol \(autobahn.asyncio.websocket.WampWebSocketServerFactory attribute\), 108](#)
[protocol \(autobahn.asyncio.websocket.WebSocketServerFactory attribute\), 107](#)
[protocol \(autobahn.twisted.rawsocket.WampRawSocketClientFactory attribute\), 103](#)
[protocol \(autobahn.twisted.rawsocket.WampRawSocketServerFactory attribute\), 103](#)
[protocol \(autobahn.twisted.websocket.WampWebSocketClientFactory attribute\), 102](#)
[protocol \(autobahn.twisted.websocket.WampWebSocketServerFactory attribute\), 102](#)
[ProtocolError, 94](#)
[public\(\) \(in module autobahn.util\), 61](#)
[publish\(\) \(autobahn.wamp.interfaces.ISession method\), 85](#)
[PublishOptions \(class in autobahn.wamp.types\), 91](#)

R

[register\(\) \(autobahn.wamp.component.Component method\), 99](#)
[register\(\) \(autobahn.wamp.interfaces.ISession method\), 85](#)
[RegisterOptions \(class in autobahn.wamp.types\), 92](#)
[REQUEST_TIMEOUT \(autobahn.websocket.types.ConnectionDeny attribute\), 74](#)
[resetProtocolOptions\(\) \(autobahn.websocket.interfaces.IWebSocketClientChannelFactory method\), 71](#)
[resetProtocolOptions\(\) \(autobahn.websocket.interfaces.IWebSocketServerChannelFactory method\), 68](#)
[resume\(\) \(autobahn.util.Stopwatch method\), 63](#)
[rid\(\) \(in module autobahn.util\), 62](#)
[rtime\(\) \(in module autobahn.util\), 63](#)
[run\(\) \(autobahn.asyncio.wamp.ApplicationRunner method\), 109](#)
[run\(\) \(autobahn.twisted.wamp.ApplicationRunner method\), 104](#)
[run\(\) \(in module autobahn.asyncio.component\), 106](#)
[run\(\) \(in module autobahn.twisted.component\), 101](#)

S

[send\(\) \(autobahn.wamp.interfaces.ITransport method\), 82](#)
[sendClose\(\) \(autobahn.websocket.interfaces.IWebSocketChannel method\), 67](#)
[sendPing\(\) \(autobahn.websocket.interfaces.IWebSocketChannel method\), 67](#)
[sendPong\(\) \(autobahn.websocket.interfaces.IWebSocketChannel method\), 68](#)
[SerializationError, 94](#)
[serialize\(\) \(autobahn.wamp.interfaces.IMessage method\), 81](#)
[serialize\(\) \(autobahn.wamp.interfaces.IObjectSerializer method\), 80](#)
[serialize\(\) \(autobahn.wamp.interfaces.ISerializer method\), 81](#)
[SERVICE_UNAVAILABLE \(autobahn.wamp.interfaces.ISerializer attribute\), 81](#)
[session_factory \(autobahn.asyncio.component.Component attribute\), 106](#)
[session_factory \(autobahn.twisted.component.Component attribute\), 100](#)
[session_factory \(autobahn.wamp.component.Component attribute\), 99](#)
[SessionDetails \(class in autobahn.wamp.types\), 89](#)
[SessionIdent \(class in autobahn.wamp.types\), 89](#)
[SessionNotReady, 94](#)
[set_payload_codec\(\) \(autobahn.wamp.interfaces.ISession method\), 86](#)
[set_valid_events\(\) \(autobahn.util.ObservableMixin method\), 64](#)
[setProtocolOptions\(\) \(autobahn.websocket.interfaces.IWebSocketClientChannelFactory method\), 71](#)
[setProtocolOptions\(\) \(autobahn.websocket.interfaces.IWebSocketServerChannelFactory method\), 68](#)
[setSessionParameters\(\) \(autobahn.websocket.interfaces.IWebSocketClientChannelFactory method\), 72](#)
[setSessionParameters\(\) \(autobahn.websocket.interfaces.IWebSocketServerChannelFactory method\), 70](#)
[start\(\) \(autobahn.asyncio.component.Component method\), 106](#)
[start\(\) \(autobahn.twisted.component.Component method\), 100](#)
[stop\(\) \(autobahn.asyncio.wamp.ApplicationRunner method\), 100](#)

method), 110
 stop() (*autobahn.twisted.wamp.ApplicationRunner method*), 105
 stop() (*autobahn.util.Stopwatch method*), 63
 Stopwatch (*class in autobahn.util*), 63
 subscribe() (*autobahn.wamp.component.Component method*), 99
 subscribe() (*autobahn.wamp.interfaces.ISession method*), 86
 SubscribeOptions (*class in autobahn.wamp.types*), 90
 SYSTEM_SHUTDOWN (*autobahn.wamp.exception.ApplicationError attribute*), 95

T

TIMEOUT (*autobahn.wamp.exception.ApplicationError attribute*), 95
 track() (*autobahn.util.Tracker method*), 64
 Tracker (*class in autobahn.util*), 63
 TransportLost, 94

U

uncache() (*autobahn.wamp.interfaces IMessage method*), 81
 unserialize() (*autobahn.wamp.interfaces.IObjectSerializer method*), 80
 unserialize() (*autobahn.wamp.interfaces.ISerializer method*), 81
 utcnow() (*in module autobahn.util*), 62
 utcstr() (*in module autobahn.util*), 62

W

WampRawSocketClientFactory (*class in autobahn.asyncio.rawsocket*), 108
 WampRawSocketClientFactory (*class in autobahn.twisted.rawsocket*), 103
 WampRawSocketClientProtocol (*class in autobahn.asyncio.rawsocket*), 108
 WampRawSocketClientProtocol (*class in autobahn.twisted.rawsocket*), 103
 WampRawSocketServerFactory (*class in autobahn.asyncio.rawsocket*), 108
 WampRawSocketServerFactory (*class in autobahn.twisted.rawsocket*), 103
 WampRawSocketServerProtocol (*class in autobahn.asyncio.rawsocket*), 108
 WampRawSocketServerProtocol (*class in autobahn.twisted.rawsocket*), 102
 WampWebSocketClientFactory (*class in autobahn.asyncio.websocket*), 108

WampWebSocketClientFactory (*class in autobahn.twisted.websocket*), 102
 WampWebSocketClientProtocol (*class in autobahn.asyncio.websocket*), 107
 WampWebSocketClientProtocol (*class in autobahn.twisted.websocket*), 102
 WampWebSocketServerFactory (*class in autobahn.asyncio.websocket*), 107
 WampWebSocketServerFactory (*class in autobahn.twisted.websocket*), 102
 WampWebSocketServerProtocol (*class in autobahn.asyncio.websocket*), 107
 WampWebSocketServerProtocol (*class in autobahn.twisted.websocket*), 102
 WebSocketClientFactory (*class in autobahn.asyncio.websocket*), 107
 WebSocketClientFactory (*class in autobahn.twisted.websocket*), 101
 WebSocketClientProtocol (*class in autobahn.asyncio.websocket*), 106
 WebSocketClientProtocol (*class in autobahn.twisted.websocket*), 101
 WebSocketServerFactory (*class in autobahn.asyncio.websocket*), 107
 WebSocketServerFactory (*class in autobahn.twisted.websocket*), 101
 WebSocketServerProtocol (*class in autobahn.asyncio.websocket*), 106
 WebSocketServerProtocol (*class in autobahn.twisted.websocket*), 101

X

xor() (*in module autobahn.util*), 61