

---

# **Linux and Shell Programming with Bash**

*Release a2faefb, 2019-08-25*

**Matt Harasymczuk**

2019-08-25




# INTRODUCTION

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	About this book . . . . .	3
1.2	Agenda . . . . .	4
1.3	VIM . . . . .	5
<b>2</b>	<b>Linux</b>	<b>7</b>
2.1	Directory Structure . . . . .	7
2.2	Basic Commands . . . . .	7
2.3	Environmental Variables . . . . .	9
2.4	Users and groups . . . . .	10
2.5	Permissions . . . . .	10
2.6	SSH . . . . .	11
2.7	Crontab . . . . .	11
2.8	Logs . . . . .	13
2.9	Filesystem . . . . .	13
2.10	Booting . . . . .	14
2.11	Devices . . . . .	15
2.12	Networking . . . . .	15
2.13	Processes . . . . .	16
2.14	X Window System . . . . .	16
<b>3</b>	<b>Bash</b>	<b>19</b>
3.1	Interpreter . . . . .	19
3.2	Variables . . . . .	20
3.3	Arrays . . . . .	20
3.4	Conditionals . . . . .	21
3.5	Loops . . . . .	22
3.6	Pipe . . . . .	24
3.7	Stdout and Stderr . . . . .	24
3.8	Network . . . . .	24
3.9	Regular Expressions . . . . .	24
3.10	Parameter expansion . . . . .	24
3.11	Multiprocessing . . . . .	26
<b>4</b>	<b>Appendix</b>	<b>27</b>
4.1	License . . . . .	27
4.2	Glossary . . . . .	27
4.3	Bibliography . . . . .	27
	<b>Bibliography</b>	<b>29</b>



**Tip:** This book is free and open source at <http://linux.astrotech.io>

---

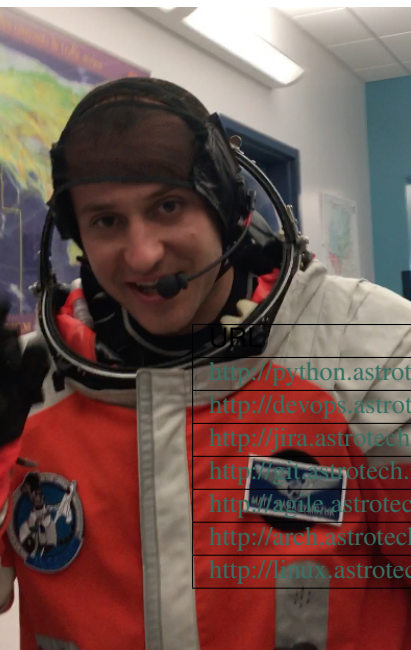

author	Matt Harasymczuk
email	<a href="mailto:matt@astrotech.io">matt@astrotech.io</a>
www	<a href="http://www.astrotech.io">http://www.astrotech.io</a>
github	<a href="https://github.com/astromatt">https://github.com/astromatt</a>
linkedin	<a href="https://linkedin.com/in/mattharasyuczuk">https://linkedin.com/in/mattharasyuczuk</a>
facebook	<a href="https://facebook.com/matt.harasyuczuk">https://facebook.com/matt.harasyuczuk</a>
slideshare	<a href="https://www.slideshare.net/astrotech/presentations">https://www.slideshare.net/astrotech/presentations</a>

Table 1.: Other books from author

	Title
<a href="http://python.astrotech.io">http://python.astrotech.io</a>	Python 3: from None to Machine Learning
<a href="http://devops.astrotech.io">http://devops.astrotech.io</a>	DevOps and CI/CD with Docker
<a href="http://jira.astrotech.io">http://jira.astrotech.io</a>	Jira Software, Jira Service Desk and Jira Core
<a href="http://git.astrotech.io">http://git.astrotech.io</a>	GIT and GIT Flow
<a href="http://agile.astrotech.io">http://agile.astrotech.io</a>	Agile Software Engineering: CI/CD with Scrum, Kanban, XP and Lean
<a href="http://arch.astrotech.io">http://arch.astrotech.io</a>	Software Architecture, Cloud, Microservices
<a href="http://linux.astrotech.io">http://linux.astrotech.io</a>	Linux and Shell Programming with Bash

**Tip:** If you're interested in training course on topics from this book, please email me at [matt@astrotech.io](mailto:matt@astrotech.io)

---



## INTRODUCTION

### 1.1 About this book

#### 1.1.1 Zapotrzebowanie uczestnika

- umieć stworzyć backlog i wiedzieć jak priorytetyzować zadania dla zespołu
- rozumieć estymacje zespołu
- znać zasady Scrum dotyczące tworzenia i utrzymywania produktów
- rozumieć różnicę między Project Managerem a Product Ownerem
- umieć połączyć rozwój oprogramowania z utrzymaniem
- wiedzieć jak pracować w kilka zespołów nad jednym produktem
- móc szybko i precyzyjnie szacować projekty dla klientów zarówno wewnętrznych jak i zewnętrznych
- zarządzać funkcjonalnościami produktu
- umieć określić hipotezę przydatności funkcjonalności i ją potwierdzić na podstawie danych z testów
- jak tworzyć i czytać wykresy: Burndown Chart, Velocity Chart, Version Report, Epic Report, Cumulative Flow Diagram, Control Chart
- wiedzieć jak tworzyć Kryteria Akceptacyjne i jak wypracować Definicję Ukończenia (Definition of Done)

#### 1.1.2 Tematyka szkolenia

##### Obszar procesowy

- Scrum jako ramy tworzenia produktu
- Projekt a Produkt
- Fundamenty Scrum i główne zasady
- Multidyscyplinarne i samo-organizujące się zespoły
- Łączenie rozwoju i utrzymania oprogramowania
- Czym różnią się Epic, User Story, Task, Requirement
- Cykl życia aplikacji, podejście SDLC (Waterfall i Scrum)
- Praca wielu zespołów nad jednym produktem
- Jak wykrywać marnotrawstwa i zastosować technikę Continuous Improvement

## Obszar wartości biznesowych

- Zwiększanie wartości dla klienta
- Zarządzanie backlogiem produktu
- Szacowanie backlogu, określanie priorytetów
- Praktyki i technologie wspierające dostarczanie wartości biznesowych (wprowadzenie)
- Tworzenie i czytanie wykresów: Burndown Chart, Velocity Chart, Version Report, Epic Report, Cumulative Flow Diagram, Control Chart
- Elementy Lean Startup dla Product Ownerów, tj. pętla Build - Measure - Learn

## Warsztat na prawdziwym produkcie

- Rozbicie na epiki i podział na User Stories, Tasks, Requirements
- Trzy iteracje refinementu, dekompozycji i estymacji
- Określanie Kryteriów Akceptacyjnych
- Określenie pracochłonności, wartości biznesowej, priorytetów MoSCoW (i dlaczego to ma sens)
- Rozplanowanie sprintów z zakresem produktu
- Wykorzystanie systemów elektronicznych wspierających proces
- Wykorzystanie wersji i release stream

## 1.2 Agenda

### 1.2.1 Agile Bootcamp

Table 1.1.: Agile Bootcamp day 1 agenda

Time	Title	Agenda
09:00-12:00	Introduction	<ol style="list-style-type: none"><li>1. What is Linux and why?</li><li>2. Unix family tree</li><li>3. Linux family tree</li><li>4. Which distribution</li></ol>
12:00-13:00	Lunch	
13:00-17:00	Bash programming workshop	<ol style="list-style-type: none"><li>1. Variables</li><li>2. Scopes</li><li>3. Files</li></ol>



Table 1.2.: Agile Bootcamp day 2 agenda

Time	Title	Agenda
09:00-12:00	Introduction	<ol style="list-style-type: none"><li>1. What is Linux and why?</li><li>2. Unix family tree</li><li>3. Linux family tree</li><li>4. Which distribution</li><li>5. Short discussion</li></ol>
12:00-13:00	Lunch	
13:00-17:00	Bash programming workshop	<ol style="list-style-type: none"><li>1. Variables</li><li>2. Scopes</li><li>3. Files</li></ol>

## 1.3 VIM

### 1.3.1 Opening files to edit

### 1.3.2 Writing files



## 2.1 Directory Structure

Figure 2.1.: Linux directory tree

Table 2.1.: Directory Structure

Path	Description
/	Main directory
/bin	Buil-in executable files
/boot	Boot files and kernel
/etc	Configuration directory
/etc/init.d	Runtime scripts
/dev	Devices and drivers
/home	User files
/lib	Shared libraries
/opt	Optional applications
/root	Superuser home directory
/sbin	Superuser built-in binary files
/srv	Optional services
/tmp	Temporary files (removed on startup)
/usr	User installed files
/usr/bin	Application executable files
/usr/lib	Applications data files
/usr/local/bin	User installed applications executable files
/usr/local/sbin	Superuser installed applications executable files
/usr/sbin	Application superuser executable files
/usr/src	Application source codes
/var	Installed applications files
/var/lock	Application lock files
/var/log	Applications and system log files
/var/pid	Application PID files
/var/spool	System spool files (crontab, mail, printer)

## 2.2 Basic Commands

Table 2.2.: Built-in commands

Command	Description
ls	List

Continued on next page

Table 2.2 – continued from previous page

Command	Description
cd	Change Directory
cat	Displays file
cp	Copy
mv	Move
rm	Remove
man	Manual Pages
clear	Clears terminal
pwd	Shows Present Working Directory
env	Show all environmental variables
echo	Displays text
tail	Last -n lines from file
head	First -n files from file
grep	Regual Expressions tool (parses input for regexp)
crontab	Automatic tasks
sudo	Switch user and execute command
apt install	installs application (on Debian based systems)
apt search	searches for application (on Debian based systems)
history	Last executed commands
sed	Stream Editor
awk	Parses lines
uniq	Remove duplicated lines
sort	Sorts input
wc	Counts characters and lines
export	Set environment variable
chown	Change Owner
chmod	Change Permissions (mods)
du	Disk Usage
df	Disk Free (space)
file	Show file type and metadata
whoami	Shows user login
which	Shows path to executable
find	Finds file in the filesystem
locate	Locates file (from updatedb database)
updatedb	Scans filesystem and create database for locate
dmesg	Debugging Messages
locale	Localization
touch	Creates empty file
alias	Creates user defined alias
mc	Midnight Commander
su	Switch user
rsync	Synchronizes two directories
ssh	Secure Shell Connection

### 2.2.1 cd

- cd ~
- cd -
- cd
- cd ..

## 2.2.2 ls

- `ls -lh`
- `alias l='ls -lAh --color=auto'`

## 2.3 Environmental Variables

- `/usr/bin/env`
- `/etc/environment`

Table 2.3.: Environmental Variables

Name	Description
PWD	Present Working Directory
UID	User ID
HOME	User Home Directory
PATH	Executable Search Path
SHELL	Current Shell
TERM	Current Terminal (character mapping)
PS1	Prompt
LANG	System Language
HOSTNAME	Hostname
IFS	Inter Field Separator
UMASK	Permission mask for new files

### 2.3.1 Environmental Variables

#### PS1

		40m	41m	42m	43m	44m	45m	46m	47m
m	gYw		gYw	gYw	gYw	gYw	gYw	gYw	gYw
1m	gYw		gYw	gYw	gYw	gYw	gYw	gYw	gYw
30m	gYw		gYw	gYw	gYw	gYw	gYw	gYw	gYw
1;30m	gYw		gYw	gYw	gYw	gYw	gYw	gYw	gYw
31m	gYw	gYw		gYw	gYw	gYw	gYw	gYw	gYw
1;31m	gYw	gYw		gYw	gYw	gYw	gYw	gYw	gYw
32m	gYw	gYw	gYw		gYw	gYw	gYw	gYw	gYw
1;32m	gYw	gYw	gYw		gYw	gYw	gYw	gYw	gYw
33m	gYw	gYw	gYw	gYw		gYw	gYw	gYw	gYw
1;33m	gYw	gYw	gYw	gYw		gYw	gYw	gYw	gYw
34m	gYw	gYw	gYw	gYw	gYw		gYw	gYw	gYw
1;34m	gYw	gYw	gYw	gYw	gYw		gYw	gYw	gYw
35m	gYw	gYw	gYw	gYw	gYw	gYw		gYw	gYw
1;35m	gYw	gYw	gYw	gYw	gYw	gYw		gYw	gYw
36m	gYw	gYw	gYw	gYw	gYw	gYw	gYw		gYw
1;36m	gYw	gYw	gYw	gYw	gYw	gYw	gYw		gYw
37m	gYw	gYw	gYw	gYw	gYw	gYw	gYw	gYw	
1;37m	gYw	gYw	gYw	gYw	gYw	gYw	gYw	gYw	

Figure 2.2.: Bash colors

```
## Prompt
red='\[\033[00;31m\'
green='\[\033[00;32m\'
blue='\[\033[00;36m\'
white='\[\033[00;39m\'

export PS1="\n${green}$ ${white}"

[ $SSH_CONNECTION ] && export PS1="\n${green}\h $ ${white}"
[ $UID == 0 ] && export PS1="\n${red}# ${white}"
```

## 2.4 Users and groups

### 2.4.1 Files

- /etc/passwd
- /etc/shadow
- /etc/group

### 2.4.2 whoami

### 2.4.3 UID

### 2.4.4 HOME

### 2.4.5 useradd vs. adduser

## 2.5 Permissions

### 2.5.1 Understanding Permissions

Table 2.4.: Understanding Permissions

Permission	Octal	Binary	Description
—	0	000	Cannot read, execute or modify
-x	1	001	Can execute
-w-	2	010	Can write (modify)
-wx	3	011	Can modify and execute
r-	4	100	Can read
r-x	5	101	Can read and execute
rw-	6	110	Can read and write
rwx	7	111	Can read, write and execute

### 2.5.2 Changing Permissions

**chmod**

**chown**

chgrp

## 2.5.3 UMASK

## 2.5.4 Sticky bit

## 2.5.5 ACL

## 2.6 SSH

### 2.6.1 Connecting

### 2.6.2 Private Key

- ~/.id\_rsa
- ~/.id\_rsa.pub

### 2.6.3 Authorized Keys

### 2.6.4 Known Hosts

### 2.6.5 Port Forwarding

### 2.6.6 Reverse Tunnel

-L

-R

### 2.6.7 Config and host aliases

### 2.6.8 SSHd

Disabling password authentication

## 2.7 Crontab

```
$ crontab -e
$ crontab -l
$ sudo crontab -e
```

### 2.7.1 Przykładowy crontab

```
5 4 * * * /bin/echo 'five past four a.m.'
*/10 * * * * /bin/echo 'every ten minutes'
5-10 4 * * * /bin/echo 'every minute from 5-10 past four a.m.'
* 4 * * * /bin/echo 'every minute at 4 a.m.'
0 14 * * * /bin/echo 'at 2 p.m.'
0 0 1 * * /bin/echo 'at midnight of first day of month'
0 0 1 JAN * /bin/echo 'at midnight of first day of January'
0 0 1 1 * /bin/echo 'at midnight of first day of January'
```

(continues on next page)

(continued from previous page)

```

0 0 * * SAT,SUN /bin/echo 'at midnight on weekends'
0 0 * * 0,6     /bin/echo 'at midnight on weekends'

@daily          /bin/echo 'at midnight'
@weekly        /bin/echo 'at midnight on Sunday'

45 04 * * * /usr/bin/updatedb
45 04 * * * /usr/sbin/chkrootkit && /usr/bin/updatedb
00 06 * * * env DISPLAY=:0.0 gui_appname
00 01 * * * ubuntu /home/ubuntu/script.sh

```

## 2.7.2 Editing crontab

```
export EDITOR=/usr/bin/vim
```

### Variables

```
PATH=/usr/sbin:/usr/bin:/sbin:/bin
```

### Special characters

- \* any value
- , value list separator
- – range of values
- / step values

### Crontab formatting

- minute: 0-60
- hour: 0-23
- day of month: 0-31
- month: JAN-DEC / 0-12
- day of week: SUN-SAT / 0-7 (Sunday = 0 or 7)

### Short notation

Table 2.5.: Short notation

Notation	Meaning
@yearly	Run once a year, 0 0 1 1 *
@annually	Same as @yearly
@monthly	Run once a month 0 0 1 * *
@weekly	Run once a week 0 0 * * 0
@daily	Run once a day 0 0 * * *
@midnight	Same as @daily
@hourly	Run once an hour 0 * * * *
@reboot	Run once, at startup



### 2.7.3 Allowing/Denying User-Level Cron

- `/etc/cron.allow`
- `/etc/cron.deny`

### 2.7.4 Files and Directories

- `/etc/crontab`
- `/var/spool/crontab/`
- `/etc/cron.d/`
- `/etc/cron.daily/`
- `/etc/cron.hourly/`
- `/etc/cron.weekly/`
- `/etc/cron.monthly/`

### 2.7.5 Other

- z jakiego użytkownika są uruchamiane
- przekierowanie outputu `stdout` i `stderr`
- dostawanie maili

## 2.8 Logs

### 2.8.1 `dmesg`

### 2.8.2 `/var/log`

### 2.8.3 `/var/log/syslog`

### 2.8.4 `/var/log/messages`

## 2.9 Filesystem

### 2.9.1 Symlinks

### 2.9.2 File types

- no extension
- `.filenames` (starting with dot)
- `file`

### 2.9.3 Size

```
du -h df -h
```

## 2.9.4 Disk partitioning

parted

gparted

druid

## 2.9.5 Checking integrity

fdisk

## 2.9.6 Mounting devices

mount

Devices

- /dev/

Mount points

- /etc/fstab
- /etc/mtab

Filesystems

## 2.10 Booting

### 2.10.1 LiveCD

RamFS

### 2.10.2 GRUB

Kernel

Initramfs

Splashscreen

Multiple OSes

Hard disk naming convention

### 2.10.3 Services and Daemons

/etc/rc.d

/etc/init.d/

Systemd

## System-V

### Init-d

`service (start | stop)`

`servicectl (start | stop)`

## 2.11 Devices

`/dev/sda /dev/sda1 /dev/sdb1`

`/dev/random /dev/urandom`

## 2.12 Networking

- `/etc/hosts localhost`
- `127.0.0.1`
- `::1`
- `/etc/hosts`
- `/etc/resolv.conf`
- `/etc/network/interfaces`
- `/etc/if-up-down/`

### 2.12.1 Built-in

`ifconfig`

`ip`

`route`

`netstat`

`iptables`

### 2.12.2 Additional

`nc`

`wireshark`

`nmap`

tcpdump

## 2.13 Processes

### 2.13.1 Spawning - &

### 2.13.2 Listing

ps aux

lsof

top

htop

### 2.13.3 PID

PID files

pidof

/var/spool/pid

### 2.13.4 Locks

### 2.13.5 Killing

kill

kill -9

killall

Ctrl-c

Ctrl-d

### 2.13.6 Priorities

nice

## 2.14 X Window System

### 2.14.1 X.org or X11

### 2.14.2 startx

### 2.14.3 Desktop Manager

- wdm
- xdm

- kdm
- gdm

#### 2.14.4 Desktop Environment

- gnome
- kde
- fluxbox
- fvwm
- xfce



## 3.1 Interpreter

### 3.1.1 Configuration files

- `~/.profile`
- `~/.bashrc`
- `~/.bash_logout`
- `/etc/bashrc`

### 3.1.2 Locale

- `$LANG`
- `/etc/locale`

### 3.1.3 Autocompletion

### 3.1.4 New lines

- `"\n"`

### 3.1.5 `#!/bin/bash`

- A.K.A shebang or hashbang
- Interpretes script as `/bin/bash` source code

### 3.1.6 `bash -x`

- shows execution steps

### 3.1.7 Comments

- `#` at the beginning of the line

### 3.1.8 Inline comments

- `#` in the middle of the line

## 3.2 Variables

### 3.2.1 single quotes

```
$ name='José Jiménez'  
$ echo 'My name is $name'  
My name is $name
```

### 3.2.2 double quotes

```
$ name="José Jiménez"  
$ echo "$name"  
My name is José Jiménez
```

### 3.2.3 Script arguments

\$0 - Script name \$1... "\$9" - positional parameter number 1 to 9 @\$ - all parameters

## 3.3 Arrays

### 3.3.1 Declaration

`ARRAY=()` Declares an indexed array `ARRAY` and initializes it to be empty. This can also be used to empty an existing array.

`ARRAY[0]=` Generally sets the first element of an indexed array. If no array `ARRAY` existed before, it is created.

`declare -a ARRAY` Declares an indexed array `ARRAY`. An existing array is not initialized. `declare -A ARRAY` Declares an associative array `ARRAY`. This is the one and only way to create associative arrays.

### 3.3.2 Storing values

`ARRAY[N]=VALUE` Sets the element `N` of the indexed array `ARRAY` to `VALUE`. `N` can be any valid arithmetic expression.

`ARRAY[STRING]=VALUE` Sets the element indexed by `STRING` of the associative array `ARRAY`.

`ARRAY=VALUE` As above. If no index is given, as a default the zeroth element is set to `VALUE`. Careful, this is even true of associative arrays - there is no error if no key is specified, and the value is assigned to string index "0".

`ARRAY=(E1 E2 ...)` Compound array assignment - sets the whole array `ARRAY` to the given list of elements indexed sequentially starting at zero. The array is unset before assignment unless the `+=` operator is used. When the list is empty (`ARRAY=()`), the array will be set to an empty array. This method obviously does not use explicit indexes. An associative array can not be set like that! Clearing an associative array using `ARRAY=()` works.

`ARRAY=( [X]=E1 [Y]=E2 ...)` Compound assignment for indexed arrays with index-value pairs declared individually (here for example `X` and `Y`). `X` and `Y` are arithmetic expressions. This syntax can be combined with the above - elements declared without an explicitly specified index are assigned sequentially starting at either the last element with an explicit index, or zero.

`ARRAY=( [S1]=E1 [S2]=E2 ...)` Individual mass-setting for associative arrays. The named indexes (here: `S1` and `S2`) are strings.

`ARRAY+=(E1 E2 ...)` Append to `ARRAY`. `ARRAY=( "${ANOTHER_ARRAY[@]}" )` Copy `ANOTHER_ARRAY` to `ARRAY`, copying each element.



### 3.3.3 Getting values

`${ARRAY[N]}` Expands to the value of the index `N` in the indexed array `ARRAY`. If `N` is a negative number, it's treated as the offset from the maximum assigned index (can't be used for assignment) - 1

`${ARRAY[S]}` Expands to the value of the index `S` in the associative array `ARRAY`.

`"${ARRAY[@]}"` `${ARRAY[@]}` `"${ARRAY[*]}"` `${ARRAY[*]}` Similar to mass-expanding positional parameters, this expands to all elements. If unquoted, both subscripts `*` and `@` expand to the same result, if quoted, `@` expands to all elements individually quoted, `*` expands to all elements quoted as a whole.

`"${ARRAY[@]:N:M}"` `${ARRAY[@]:N:M}` `"${ARRAY[*]:N:M}"` `${ARRAY[*]:N:M}` Similar to what this syntax does for the characters of a single string when doing substring expansion, this expands to `M` elements starting with element `N`. This way you can mass-expand individual indexes. The rules for quoting and the subscripts `*` and `@` are the same as above for the other mass-expansions.

### 3.3.4 Metadata

`${#ARRAY[N]}` Expands to the length of an individual array member at index `N` (stringlength)

`${#ARRAY[STRING]}` Expands to the length of an individual associative array member at index `STRING` (stringlength)

`${#ARRAY[@]}` `${#ARRAY[*]}` Expands to the number of elements in `ARRAY`

`${!ARRAY[@]}` `${!ARRAY[*]}` Expands to the indexes in `ARRAY` since BASH 3.0

### 3.3.5 Destruction

`unset -v ARRAY` `unset -v ARRAY[@]` `unset -v ARRAY[*]` Destroys a complete array `unset -v ARRAY[N]` Destroys the array element at index `N` `unset -v ARRAY[STRING]` Destroys the array element of the associative array at index `STRING`

## 3.4 Conditionals

### 3.4.1 if

```
name="José Jiménez"

if [ $mie == "José Jiménez" ]; then
    echo "My name José Jiménez"
fi
```

### 3.4.2 if and else

```
name="José Jiménez"

if [ $mie == "José Jiménez" ]; then
    echo "My name José Jiménez"
else
    echo "I am someone else"
fi
```

### 3.4.3 Short version - && and ||

```
$ name="José Jiménez"
$ [ $mie == "José Jiménez" ] && echo "My name José Jiménez" || echo "I am someone_
↵else"
My name José Jiménez
```

### 3.4.4 Case (A.K.A. switch)

```
case $( arch ) in      # $( arch ) returns machine architecture.
                       # Equivalent to 'uname -m' ...
i386 ) echo "80386-based machine";;
i486 ) echo "80486-based machine";;
i586 ) echo "Pentium-based machine";;
i686 ) echo "Pentium2+-based machine";;
*     ) echo "Other type of machine";;
esac

exit 0
```

```
echo; echo "Hit a key, then hit return."
read Keypress

case "$Keypress" in
[:lower:] ) echo "Lowercase letter";;
[:upper:] ) echo "Uppercase letter";;
[0-9]     ) echo "Digit";;
*        ) echo "Punctuation, whitespace, or other";;
esac      # Allows ranges of characters in [square brackets],
          #+ or POSIX ranges in [[double square brackets].
```

## 3.5 Loops

### 3.5.1 For

```
for i in `seq 1 10`; do
  echo $i
done
```

```
for i in $( ls ); do
  echo item: $i
done
```

**Warning:** IFS='\\n'

#### Inline for

- for a in \*; do echo \$a; done

### 3.5.2 While

```
COUNTER=0

while [ $COUNTER -lt 10 ]; do
    echo The counter is $COUNTER
    let COUNTER=COUNTER+1
done
```

```
while [ $# -gt 0 ]; do    # Until you run out of parameters . . .
    case "$1" in
        -d|--debug)
            # "-d" or "--debug" parameter?
            DEBUG=1
            ;;
        -c|--conf)
            CONFFILE="$2"
            shift
            if [ ! -f $CONFFILE ]; then
                echo "Error: Supplied file doesn't exist!"
                exit $E_CONFFILE    # File not found error.
            fi
            ;;
    esac
    shift    # Check next set of parameters.
done
```

### 3.5.3 Until

```
COUNTER=20

until [ $COUNTER -lt 10 ]; do
    echo COUNTER $COUNTER
    let COUNTER-=1
done
```

## 3.6 Pipe

### 3.6.1 Pipe - |

### 3.6.2 awk

### 3.6.3 sed

### 3.6.4 sort

### 3.6.5 uniq

## 3.7 Stdout and Stderr

### 3.7.1 > and >>

### 3.7.2 < and <<

### 3.7.3 1 > /dev/null

### 3.7.4 2 > &1

## 3.8 Network

### 3.8.1 wget

### 3.8.2 curl

## 3.9 Regular Expressions

### 3.9.1 Grep

### 3.9.2 Egrep

## 3.10 Parameter expansion

### 3.10.1 Simple usage

- `$PARAMETER`
- `${PARAMETER}`

### 3.10.2 Indirection

- `${!PARAMETER}`

### 3.10.3 Case modification

- `${PARAMETER^}`
- `${PARAMETER^^}`
- `${PARAMETER,}`
- `${PARAMETER,,}`
- `${PARAMETER~}`
- `${PARAMETER~~}`

### 3.10.4 Variable name expansion

- `${!PREFIX*}`
- `${!PREFIX@}`

### 3.10.5 Substring removal (also for filename manipulation!)

- `${PARAMETER#PATTERN}`
- `${PARAMETER##PATTERN}`
- `${PARAMETER%PATTERN}`
- `${PARAMETER%%PATTERN}`

### 3.10.6 Search and replace

- `${PARAMETER/PATTERN/STRING}`
- `${PARAMETER//PATTERN/STRING}`
- `${PARAMETER/PATTERN}`
- `${PARAMETER//PATTERN}`

### 3.10.7 String length

- `${#PARAMETER}`

### 3.10.8 Substring expansion

- `${PARAMETER:OFFSET}`
- `${PARAMETER:OFFSET:LENGTH}`

### 3.10.9 Use a default value

- `${PARAMETER:-WORD}`
- `${PARAMETER-WORD}`

### 3.10.10 Assign a default value

- `${PARAMETER:=WORD}`
- `${PARAMETER=WORD}`

### 3.10.11 Use an alternate value

- `${PARAMETER:+WORD}`
- `${PARAMETER+WORD}`

### 3.10.12 Display error if null or unset

- `${PARAMETER:?WORD}`
- `${PARAMETER?WORD}`

## 3.11 Multiprocessing

### 3.11.1 Process - `... &`

### 3.11.2 Subprocess - `$(...)`

### 3.11.3 Return codes from last command `$?`

## 4.1 License

MIT License

Copyright (c) 2019 Matt Harasymczuk

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## 4.2 Glossary

## 4.3 Bibliography





## BIBLIOGRAPHY

- [1] Inc. Linux Kernel Organization. The linux kernel documentation. 2019. URL: <https://www.kernel.org/doc/html/latest/>.